

MILITARY SPECIFICATION SHEET

RECTIFIERS, METALLIC, SELENIUM, SINGLE PHASE, CENTER TAP, STYLE RS20


This specification sheet forms a part of the latest issue of Military Specification MIL-R-11050.

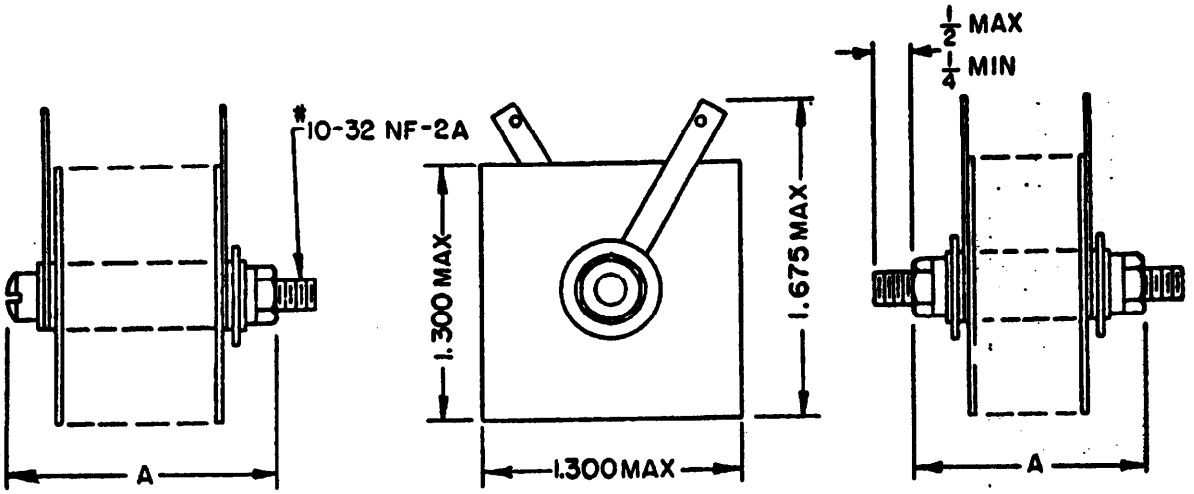


CIRCUIT DIAGRAM

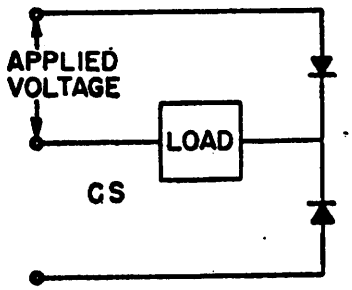

VOLTAGE DERATING CURVE



CURRENT DERATING CURVE



NOTES:

1. All dimensions in inches.
2. Terminals shall protrude from the top of the rectifier and shall not extend beyond the protracted width of the cells.
3. AC terminals shall be located at the extremities of the rectifier.
4. Reverse current shall not exceed 10 milliamperes.

Fed. Sup. Class.
6180

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

TYPE-DESIGNATION EXAMPLE

RS20	B	100	CS	561
STYLE	MOUNTING	DC VOLTAGE RATING	CIRCUIT CONFIGURATION	DC CURRENT RATING

TYPE DESIGNATION [1]	DC OUTPUT RATINGS [2]		LENGTH A [3]	FORWARD VOLTAGE DROP, MAXIMUM	AC APPLIED VOLTAGE, MAXIMUM (RMS)	NUMBER OF CELLS PER RECTIFIER, MINIMUM
	Current	Voltage				
	Ampere	*Volts*	*Inches*	*Volts*	*Volts*	
RS20-100CS561	.560	10	1	2.0	13	2
RS20-200CS561	.560	20	1-3/8	4.0	26	4
RS20-300CS561	.560	30	1-3/4	6.0	39	6
RS20-400CS561	.560	40	2-3/32	8.0	52	8
RS20-500CS401	.400	50	2-13/32	7.5	65	10
RS20-500CS561	.560	50	2-13/16	10.0	65	10
RS20-600CS321	.320	60	2-23/32	9.0	78	12
RS20-600CS441	.440	60	3-1/2	12.0	78	12
RS20-800CS321	.320	80	3-5/16	12.0	104	16
RS20-800CS441	.440	80	4-13/32	16.0	104	16
RS20-101CS321	.320	100	3-29/32	15.0	130	20
RS20-101CS441	.440	100	5-5/16	20.0	130	20
RS20-121CS321	.320	120	4-17/32	18.0	156	24
RS20-121CS441	.440	120	6-7/32	24.0	156	24
RS20-141CS241	.240	140	5-1/8	21.0	182	28
RS20-141CS321	.320	140	7-1/8	28.0	182	28
RS20-161CS241	.240	160	5-3/4	24.0	208	32
RS20-181CS241	.240	180	6-3/8	27.0	234	36
RS20-201CS241	.240	200	6-31/32	30.0	260	40

[1] Insert appropriate letter for mounting method. Bolt (letter B) is available only for rectifiers with a length A dimension of 1¼ inches or less. Stud (letter S) is available for rectifiers of all lengths.

[2] Ratings are for resistive and inductive loads and continuous operation at 55° C ambient temperature. For capacitive or battery loads, the ratings shall be 80 percent of those specified.

[3] For length A dimensions less than 6 inches, tolerance is ±1/16 inch; from 6 to 12 inches, inclusive, tolerance is ±⅛ inch; and for 12 inches and greater, tolerance is ±¼ inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.