

MILITARY SPECIFICATION SHEET

RECTIFIERS, METALLIC, SELENIUM, SINGLE PHASE, HALF WAVE, STYLE RS30


This specification sheet forms a part of the latest issue of Military Specification MIL-R-11050.

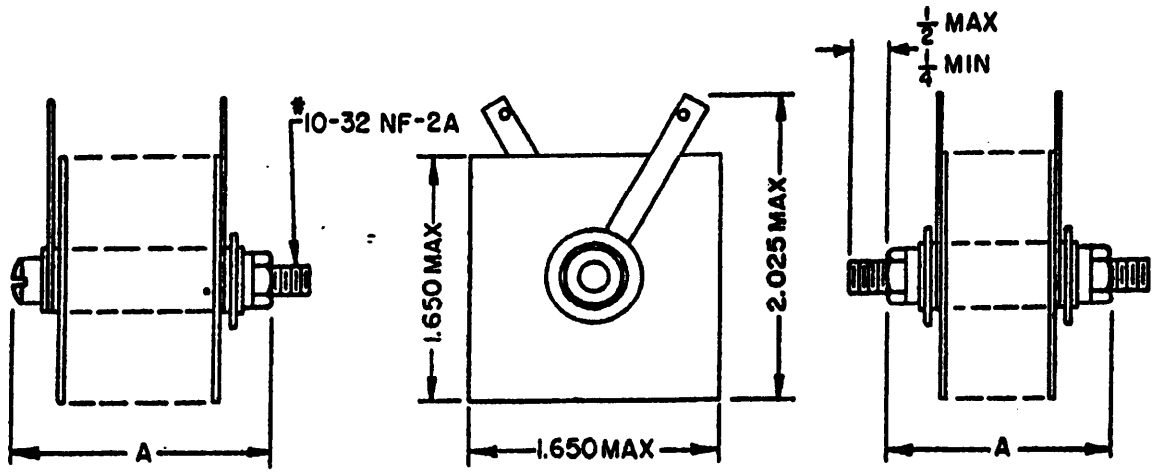


CIRCUIT DIAGRAM



VOLTAGE DERATING CURVE



CURRENT DERATING CURVE




NOTES:

1. All dimensions in inches.
2. Terminals shall protrude from the top of the rectifier and shall not extend beyond the protracted width of the cells.
3. Reverse current shall not exceed 20 milliamperes.

Fed. Sup. Class.
6130

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

TYPE-DESIGNATION EXAMPLE

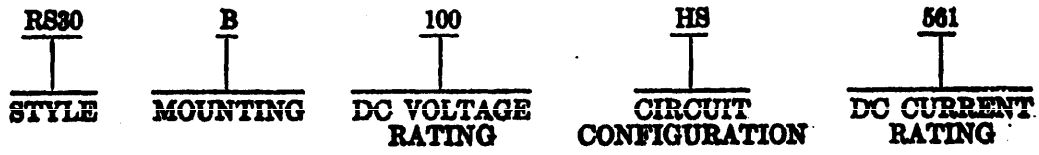

TYPE DESIGNATION [1]	DC OUTPUT RATINGS [2]		LENGTH A [3]	FORWARD VOLTAGE DROP, MAXIMUM	AC APPLIED VOLTAGE, MAXIMUM (RMS)	NUMBER OF CELLS PER RECTIFIER, MINIMUM
	Current	Voltage				
	Amperes	*Volts*	*Inches*	*Volts*	*Volts*	
RS30-100HS561	.560	10	13/16	2.0	26	1
RS30-200HS561	.560	20	1	4.0	52	2
RS30-300HS561	.560	30	1-3/16	6.0	78	3
RS30-400HS561	.560	40	1-3/8	8.0	104	4
RS30-500HS561	.560	50	1-15/32	10.0	130	5
RS30-600HS561	.560	60	1-3/4	12.0	156	6
RS30-800HS561	.560	80	2-1/8	16.0	208	8
RS30-101HS401	.400	100	2-15/32	15.0	260	10
RS30-101HS561	.560	100	2-27/32	20.0	260	10
RS30-121HS321	.320	120	2-13/16	18.0	312	12
RS30-121HS441	.440	120	3-11/16	24.0	312	12
RS30-141HS321	.320	140	3-5/32	21.0	364	14
RS30-141HS441	.440	140	4-1/8	28.0	364	14
RS30-161HS321	.320	160	3-1/2	24.0	416	16
RS30-161HS441	.440	160	4-11/16	32.0	416	16
RS30-181HS321	.320	180	3-13/16	27.0	468	18
RS30-181HS441	.440	180	5-3/16	36.0	468	18
RS30-201HS321	.320	200	4-1/8	30.0	520	20
RS30-201HS441	.440	200	5-11/16	40.0	520	20
RS30-231HS321	.320	230	4-21/32	34.5	598	23
RS30-231HS441	.440	230	6-7/16	46.0	598	23
RS30-261HS241	.240	260	5-1/8	39.0	676	26
RS30-261HS321	.320	260	7-3/16	52.0	676	26
RS30-301HS241	.240	300	5-25/32	45.0	780	30
RS30-351HS241	.240	350	6-5/8	52.5	910	35
RS30-401HS241	.240	400	7-7/16	60.0	1040	40

[1] Insert appropriate letter for mounting method. Bolt (letter B) is available only for rectifiers with a length A dimension of 1¼ inches or less. Stud (letter S) is available for rectifiers of all lengths.

[2] Ratings are for resistive and inductive loads and continuous operation at 55° C ambient temperature. For capacitive or battery loads, the ratings shall be 80 percent of those specified.

[3] For length A dimensions less than 6 inches, tolerance is ±1/16 inch; from 6 to 12 inches, inclusive, tolerance is ±¼ inch; and for 12 inches and greater, tolerance is ±½ inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Avionics Research and Development Activity
ATTN: DAVAA-S/PE
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:03Z
Check the source to verify that this is the current version before use.