

MILITARY SPECIFICATION SHEET

RECTIFIERS, METALLIC, SELENIUM, SINGLE PHASE, CENTER TAP, STYLE RS30


This specification sheet forms a part of the latest issue of Military Specification MIL–R–11050.

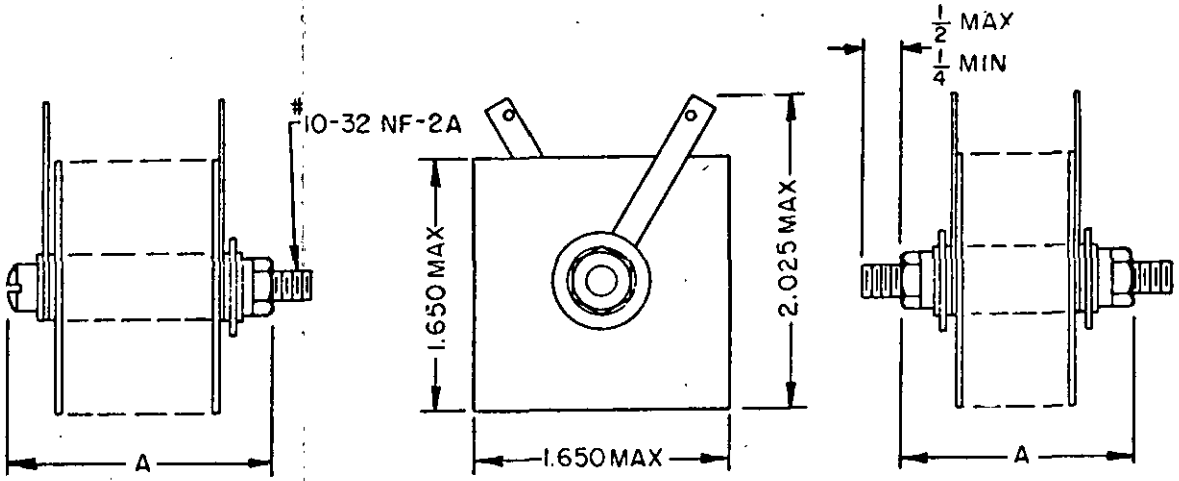


CIRCUIT DIAGRAM



VOLTAGE DERATING CURVE



CURRENT DERATING CURVE




NOTES:

1. All dimensions in inches.
2. Terminals shall protrude from the top of the rectifier and shall not extend beyond the protracted width of the cells.
3. AC terminals shall be located at the extremities of the rectifier.
4. Reverse current shall not exceed 20 milliamperes.

Fed. Sup. Class.
6130

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:03Z
Check the source to verify that this is the current version before use.

TYPE-DESIGNATION EXAMPLE

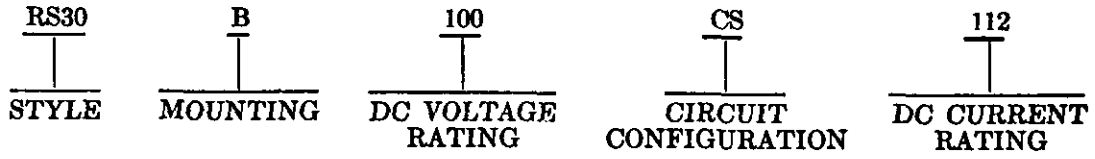

TYPE DESIGNATION [1]	DC OUTPUT RATINGS [2]		LENGTH A [3]	FORWARD VOLTAGE DROP, MAXIMUM	AC APPLIED VOLTAGE, MAXIMUM (RMS)	NUMBER OF CELLS PER RECTIFIER, MINIMUM
	Current	Voltage				
	Ampere	*Volts*	*Inches*	*Volts*	*Volts*	
RS30–100CS112	1.100	10	1–1/16	2.0	13	2
RS30–200CS112	1.100	20	1–7/16	4.0	26	4
RS30–300CS112	1.100	30	1–13/16	6.0	39	6
RS30–400CS112	1.100	40	2–3/16	8.0	52	8
RS30–500CS801	.800	50	2–17/32	7.5	65	10
RS30–500CS112	1.100	50	2–29/32	10.0	65	10
RS30–600CS641	.640	60	2–7/8	9.0	78	12
RS30–600CS881	.880	60	3–5/8	12.0	78	12
RS30–800CS641	.640	80	3–9/16	12.0	104	16
RS30–800CS881	.880	80	4–3/4	16.0	104	16
RS30–101CS641	.640	100	4–3/16	15.0	130	20
RS30–101CS881	.880	100	5–3/4	20.0	130	20
RS30–121CS641	.640	120	4–7/8	18.0	156	24
RS30–121CS881	.880	120	6–3/4	24.0	156	24
RS30–141CS481	.480	140	5–1/2	21.0	182	28
RS30–141CS641	.640	140	7–3/4	28.0	182	28
RS30–161CS881	.880	160	6–3/16	24.0	208	32
RS30–181CS481	.480	180	6–7/8	27.0	234	36
RS30–201CS481	.480	200	7–1/2	30.0	260	40

[1] *Insert appropriate letter for mounting method.* Bolt (letter B) is available only for rectifiers with a length A dimension of 1¼ inches or less. Stud (letter S) is available for rectifiers of all lengths.

[2] Ratings are for resistive and inductive loads and continuous operation at 55° C ambient temperature. For capacitive or battery loads, the ratings shall be 80 percent of those specified.

[3] For length A dimensions less than 6 inches; tolerance is ±1/16 inch; from 6 to 12 inches, inclusive, tolerance is ±⅛ inch; and for 12 inches and greater, tolerance is ±¼ inch.

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:03Z
Check the source to verify that this is the currentversion before use.