A-A-55015
April 28, 1992

COMMERCIAL ITEM DESCRIPTION

PRESS, "H" FRAME TYPE, HYDRAULIC, ELECTRIC MOTOR DRIVEN , WITH ROLL OUT WORKTABLE

The General Services Administration has authorized the use of this commercial item description in preference to MIL-P-80128C.

1. ABSTRACT

1.1 Abstract. This description covers electric motor driven, hydraulically operated, "H" frame type presses with a roll out worktable. The presses are used in maintenance and repair shops for pressing operations.

2. CLASSIFICATION

2.1 Classification. The presses shall be of the following sizes. The size to be furnished shall be as specified, (see 7.1).

Size 25 - 25 ton capacity
Size 50 - 50 ton capacity
Size 75 - 75 ton capacity
Size 100 - 100 ton capacity
Size 150 - 150 ton capacity
Size 200 - 200 ton capacity

3. SALIENT CHARACTERISTICS

3.1 Design. The press shall be new and of the "H" frame type design. The press shall be designed for floor mounting and shall include all components, parts, and features to meet the performance requirements specified herein.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd. Memphis, TN 38114-5213.

AMSC N/A FSC 3442
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

3.2 Frame. The frame shall be fabricated of structural steel sections, consisting of a headrail, worktable, siderails, upper and lower spacer bars, and steel plates attached to each siderail. The steel plates shall be provided with tracks for mounting and supporting the roll out worktable. The steel plates shall extend beyond the press frame at a distance which will allow ease of loading and unloading of workplaces by overhead crane or other means. Stops shall be provided to prevent the roll out worktable from rolling off the tracks. All components shall be fastened together by bolts or by welding, or a combination of bolting and welding. Regardless of the method used, the press shall maintain the strength to withstand not less than 1-1/2 times the maximum rated tonnage capacity of the press. The headrail shall support the hydraulic cylinder and ram assembly. The headrail and all other crossmembers shall provide the strength to maintain parallelism of the side members. The ram axis shall be perpendicular to the worktable within an accuracy of 0.120 inch per foot.

3.3 Siderails, headrail, and support pins. The siderails shall have a series of equally spaced holes. The headrail shall have matching holes to the siderails. Not less than two steel pins shall be provided for supporting the headrail. The pins shall be shaped for easy insertion and removal from the holes. The shear strength of the pins shall be not less than 1-1/2 times the tonnage rating of the press. The pin hole spacing in all members shall have the accuracy to ensure that all pins support equal loads when pressing force is centered between the headrail and the worktable. A winch type or a screw type lifting device for raising and lowering the headrail shall be provided.

3.4 Roll out worktable. The roll out worktable shall be provided with roller bearings mounted on the four corners of the table for ease of movement when loading and unloading workplaces. Unless otherwise specified (see 7.1), worktables on presses rated at 100 tons and over shall have a horizontal adjustment from not less than 4 inches to 27 inches.

3.5 Hydraulic system. The hydraulic system shall conform to or exceed the requirements of National Fluid Power Association (NFPA/JIC) T2.24 .1. The hydraulic system shall be capable of exerting 100 percent of the rated tonnage of the press.

3.5.1 Cylinder and ram assembly. Unless otherwise specified (see 7.1), the press shall be furnished with a moveable type cylinder and ram assembly. The moveable assembly shall have a means of being clamped or locked at any position within its range of travel. When specified (see 7.1), a fixed type assembly shall be furnished. Provisions to prevent extension of the ram beyond its normal “end-of-stroke” position shall be provided.

3.5.2 Hydraulic pump The hydraulic pump shall be electric motor driven. The pumps shall be the manufacturer’s standard pump offered to the commercial market.

3.6 Pressure gauge. A pressure gauge calibrated to read in tons of ram force shall be furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

3.7 Electrical requirements. The press shall be wired to conform to NFPA 79• Each press shall be wired to draw all of its electrical power from a single circuit. Unless otherwise specified (see 7.1), each press shall be designed to operate on 3-phase, 60-Hertz (Hz), dual 230/460-volts. Conversion from one voltage to the other shall be accomplished by the reconnection of existing components. The press shall be initially wired as specified (see 7.1).

TABLE I. Size and characteristics.

Size	Rated cap. 1/	Width between table channels 2/	Distance ram to nose 2/	Vertical travel 2/ headrail	Ram 2/ piston travel	Ram speed 3/	
						No load	Full load
25	25	7	39	28	10	35	15
50	50	7	44	28	10	22	8
75	75	7	43	28	10	15	5
100	100	4-27	60	44	13	7	3
150	150	4-27	64	20	14	5	3
200	200	4-27	64	20	14	4	2

1/ Tons: 2/ Inches: 3/ Inches per minute:

3.7.1 Motors. Motors shall be rated for continuous duty and shall have ball or roller bearings of the sealed and permanently lubricated type. Unless otherwise specified (see 7.1), each motor shall have-a dripproof enclosure.

3.8 Size and characteristics. Unless otherwise specified (see 7.1), the size and capacity of the press shall meet the requirements of table I for the size press specified. Press size and capacity shall be not less than the stated requirements of the size ordered. When a range is given, the required performance shall be from the stated minimum or less to the stated maximum or greater.

3.8.1 Physical size limitations. When specified (see 7.1), the physical size of the press shall not exceed the height, width, and length restrictions specified by the procuring activity to ensure the press will fit in its future operating location.

3.9 Performance. The press shall be capable of exerting 100 percent of its maximum rated tonnage capacity without damage to the press or any press component.

3.9.1 Additional performance requirements. Performance features required in addition to, or in lieu of the requirements herein, shall be as specified by the procuring activity (see 7.1).

3.10 Standard equipment. All standard equipment normally provided with the manufacturer's commercial press shall be furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

3.10.1 Optional equipment. Optional equipment shall be furnished as specified and fully described (see 7.1). The equipment provided shall be functional without requiring modification of the equipment or press.

3.11 Repair parts. Required repair parts shall be furnished as specified (see 7.1).

3.12 Reference documents. Unless other wise specified (see 7.1), the documents referenced in this commercial item description shall be the issues in effect on the date of issuance of the invitation for bids or requests for proposal. These documents form a part of this commercial item description to the extent specified. In the event of a conflict between this document and a document referenced herein, this document shall take preference.

3.13 General requirements.

3.13.1 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

3.13.2 Safety and health requirements. All parts, components, mechanisms, and assemblies furnished on the press, whether or not specifically required herein, shall conform with all requirements of OSHA 29 CFR 1910 and ANSI B11.2. If a conflict arises between OSHA 29 CFR 1910 and ANSI B11.2, OSHA 29 CFR 1910 shall apply. Additional safety and health requirements shall be as specified (see 7.1).

3.13.3 Environmental protection. During the manufacture of the press, materials hazardous to the ecological system as prohibited by Federal, state, or local statutes in effect on the date of the contract shall not be used.

3.13.4 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. All parts shall be manufactured to such standards as will permit replacement or adjustment without modification of parts or press.

3.13.5 Threads. All threaded parts used on the press and its related attachments and accesories shall conform to FED-STD-H28 and the applicable "Detailed Standard" section referenced therein.

3.13.6 Operating and maintenance instructions. Operating and maintenance instructions shall be provided with each machine furnished. The instructions shall include directions and information necessary for the safe operation and maintenance of the machine and a list of replacement parts with part numbers. The instructions shall be written in the English language.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

3.13.7 Marking on instruments, control panels, charts, and plates. All words on the press including all Instruments, control panels, charts, plates and related attachments shall be in the English language. Characters shall be marked in boldface on a contrasting background. All plates shall be corrosion resistant.

3.13.8 Data plates. All standard data plates normally provided with the manufacturer's standard commercial press shall be furnished. Any additional data plates shall be as specified and fully described by the procuring activity (see 7.1).

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Responsibility of inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as 'otherwise specified in the contract, the contractor may use his own or any other facility suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the commercial item description where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

5.3 Quality conformance inspection. When specified (see 7.1), quality conformance inspection shall be applied to production units offered for acceptance under the contract. Unless otherwise specified (see 7.1), quality conformance shall consist of the examination, the tests, and the inspection. One press from each lot shall be randomly selected for inspection. A lot shall be defined as the number of presses offered for delivery under each contract. If the press selected for inspection fails the examination, the test, or the inspection, all presses in' the lot shall be inspected. All presses selected for inspection shall pass the examination, the tests, and inspection to be accepted.

5.3.1 Examination. Each press selected for quality conformance inspection shall be visually examined to determine compliance with all requirements of this commercial item description.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

5.3.2 Operational test, Each press selected for quality conformance inspection shall be operated at no load for not less than one half hour, Proper operation of all controls, motors, adjusting mechanisms, and accessories shall be verified during the trial period.

5.3.3 Performance tests. Each press selected for quality conformance inspection shall be tested for exerting a force of 100 percent of its maximum rated tonnage for a period of one hour and shall be completed without making any adjustments to or performing any maintenance on the press.

5.3.4 Alinment test. Each press selected for quality conformance inspection shall be tested to determine compliance with the alignnment requirements specified in para 3.2.

5.3.5 Packaging inspection. Packaging of each press selected for quality conformance inspection shall be inspected to determine compliance with packaging requirements as specified in the contract.

5.3.6 Environmental protection certification of conformance. The contractor shall certify and maintain substantiating evidence that the product offered complies with all environmental protection restrictions as required herein. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PRESERVATION, PACKAGING, PACKING, AND MARKING

6.1 Preservation, packaging, labeling, and marking. Preservation, packaging, labeling, and marking shall be as specified in the contract order.

7. NOTES

7.1 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents.

a. Title, number, and date of this commercial item description.

b. Size and quantity required (see 2.1).

c. Rollout worktable, if different (see 3.4).

b. Cylinder and ram assembly, if different (see 3.5.1).

c. Voltage requirements, if different (see 3.7).

d. Initial voltage, as specified (see 3.7).

e. Motors, if different (see 3.7.1).

f. Size and characteristics, if different (see 3.8).

g. Specify physical size limitation, if required (see 3.8.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

h. Additional performance features, if required (see 3.9.1).

i. Specify and fully describe optional equipment, if required (see 3.10.1).

j. Specify applicable repair parts, if required (see 3.11).


k. Specify and fully describe additional safety and health requirements, if required (see 3.13.2).

1. Data plates, if different fully describe (see 3.13.8).

m. Quality conformance inspection, when required (see 5.3).

n. Inspection requirements, if different (see 5.3).

7.2 Part identification number (PIN). The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

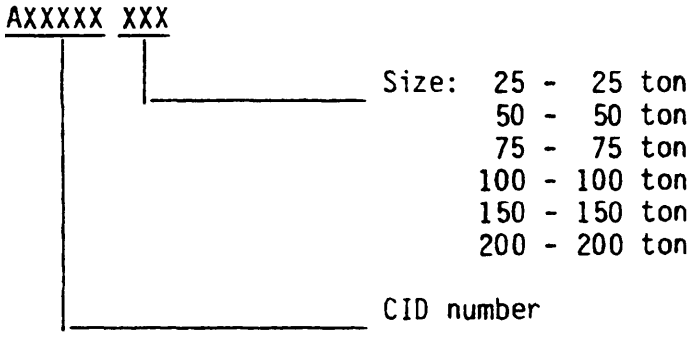

7.3 Source for documents referenced in this CID.

Federal Standards, FED-STD-376 and FED-STD-H28, are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5099.

OSHA, 29 CFR 1910 is available from the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402-0001.

ANSI B11.2 is available from the American National Standards Institute, ATTN: Sales Dept., 1430 Broadway, New York, NY 10018-3363.

NFPA 79 is available from the National Fire Protection Association Inc., Batterymarch Park, Quincy, MA 02269-9101.

7.4 Preparing activity. This document' was prepared at the Defense Industrial Plant Equipment Center, 2163 Airways Blvd., Memphis, TN 38114-5213, phone number, commercial 901-775-6247, DSN 638-6247.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

A-A-55015

Custodians:
Army - AL
Navy - SH
Air Force - 99

Review activities:
Air Force - 84
DLA - GS

User activities:
Army - AR
Navy - AS, OS, MC

Preparing Activity:
DLA - IP

Project (3442-0060)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55015	92 Apr 28

3. DOCUMENT TITLE
PRESS, "H" FRAME TYPE, HYDRAULIC, ELECTRIC MOTOR DRIVEN, WITH ROLL OUT WORKTABLE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Defense Industrial Plant Equipment Center ATTN: DIPEC-SSG	(901) 775-6247	DSN 683-6247
c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5213	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.