INCH-POUND
A-A-55063B
November 02, 2020
SUPERSEDING
A-A-55063A
March 13, 2012

COMMERCIAL ITEM DESCRIPTION

APRON, UTILITY, IMPERMEABLE, RUBBER COATED FABRIC (GENERAL PURPOSE)

The General Services Administration has authorized the use of this commercial item description (CID) by all Federal Agencies.

1. SCOPE. This Commercial Item Description covers the requirements for a general purpose, impermeable utility bib type apron in a synthetic rubber coated fabric to be used by personnel engaged in heavy duty occupations such as equipment maintenance, material handling, abattoir worker, butcher, depot maintenance, etc.

2. CLASSIFICATION. The apron shall be available in one (1) color, type and size.

3. SALIENT CHARACTERISTICS.

3.1 Description. The apron shall be a bib type, made of a single thickness coated cloth. The side of the coated cloth with the heaviest application of the coating compound shall be on the front (face) side. The neck and waist shall be securely attached to the apron through grommets applied with the reinforcement patches at upper corners of the bib and corners at waist (see Figure 1). The ends of the tape/webbing for waist and neck straps shall be either tipped or impregnated with resin 1/4 inch (minimum) in length and shall contain sufficient resin to prevent raveling. All raw edges of the apron shall be folded over 3/8 (±1/16) inch and topstitched 1/4 inch from edge. Corners shall be backstitched 3/4 (±1/8) inch. The apron shall meet the finished dimensions requirements of Table IV and the color shall be black unless otherwise specified in the contract or purchase order (see 7.4).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

3.1.1 Figure. Figure 1 is furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2 Materials.

3.2.1 Base material. The base cloth shall be made from 100 percent polyester and shall have the physical properties provided in Table I when tested in accordance with the test methods provided in Table I.

TABLE I. Base material requirements.

Characteristic	Requirement	Test method
Fiber content	100 % Polyester	AATCC TM20 (see 7.5)
Fabric weight, oz./yd^2	2.5-3.1	ASTM D3776/D3776M, Opt. C
Yarn	Spun staple	Visual
Yarn count, yarns per inch (min.) Warp Filling	 52 30	ASTM D3775

3.2.1.1 Coated cloth. The coating compound (see 3.2.1.1.1) shall be applied to both sides of the base 100 percent polyester cloth with the heaviest application on the face side. The coated cloth shall be dusted with powder (see 3.2.1.2). The coated cloth shall be fully vulcanized and shall meet the performance requirements of Table II when tested by the test methods specified in Table II.

TABLE II. Coated cloth performance requirements.

Characteristic	Requirement	Test method
Overall weight, oz./yd^2	13.0-15.1	ASTM D3776/D3776M, Opt. C
Breaking strength, pounds (min.) Warp Filling	 155 130	ASTM D5034
Coating adhesion, lb/2-inch width, (min.)	6.0	ASTM D751 1/
Blocking, (min.)	No.1	ASTM D751 2/
Hydrostatic resistance Initial After abrasion, 5/	 3/ 3/	 ASTM D751, Proc. 2, 4/ ASTM D751 Proc. 2

1/ Prior to the peeling test, two (2) specimen shall be bonded together face to back with cyanoacrylate adhesive to form a specimen unit. Three (3) specimen units shall be tested. A pulling clamp speed of 5 mm/sec (12 in/min) shall be used. The adhesion shall be the average of the five (5) highest peaks of force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

2/ The test shall be performed at a temperature of 180 (± 2º F) for 30 minutes. Evaluate the resistance of the specimen to blocking by the scale given below.

1—*No Blocking.* Cloth surfaces separate without any evidence of adhering.
2—*Trace Blocking.* Cloth surfaces show slight adhesion.
3—*Slight Blocking.* Cloth surfaces must be slightly peeled to separate.
4— *Blocking.* Cloth surfaces separate with difficulty or coating is removed during separation.

3/ The 4-1/2 inch diameter test area shall show no leakage. Leakage is defined as the appearance of water droplets at three different places in the 4-1/2 inch diameter test area.
4/ Except the hydrostatic head shall be raised to a height of 20 inches for a period of one (1) hour.
5/ An area approximately 2-inches by 8-inches extended along the center line of the specimen shall be abraded by means of a 2-inch square od 1/0 garnet paper. The garnet paper shall be uniformly loaded to 8.0 (±0.1) ounces. The specimen shall be laid on a smooth level surface with the heavily coated side up and abraded as described by moving the loaded garnet paper five (5) times in each direction. The specimen shall be turned over and abraded on the other side (i.e. the specimen is abraded in a north-south direction on one side and east-west direction on the other side). The abraded specimen shall be tested with the abraded area in the center of the 4-1/2 inch diameter test area. The hydrostatic head shall be raised to a height of 20-inches. Leakage is defined as the appearance of water droplets at three different places in the 4-1/2 inch diameter test area.

3.2.1.1.1 Coating compound. The coating compound shall be chloroprene rubber or polyisobutylene rubber suitably compounded, plasticized with phthalate or phosphate ester plasticizers and pigment black when tested as specified in ASTM D297. Natural rubber, synthetic rubber other than aforementioned or reclaimed rubber shall not be used.

3.2.1.2 Dusting powder. The dusting powder for application to the coated cloth shall be a whiting powder, finely divided non-toxic mineral material of ground potassium aluminum silicate (known as ground mica and ground muscovite mica).

3.2.2 Tape/webbing (nylon or polyester). The tape/webbing shall be 3/4 (-1/32, +1/16) inch wide, and sufficiently lightweight and flexible for tying when the apron is donned. The fiber content shall be either 100 percent nylon or polyester. The tape/webbing shall meet the requirements of Table III when tested in accordance methods provided in Table III. The apron shall have two (2) tapes/webbings for the waist cut to 24 (±1/2) inches in length, and one (1) tape/webbing cut to 30 (±1/2) inches for the neck strap.

TABLE III. Tape/webbing performance requirements.

Characteristic	Requirement	Test method
Fiber content	100 % Polyester or Nylon	AATCC TM20 (see 7.5)
Water repellency Dynamic absorption, percent, Initial only (max.)	40	AATCC TM70
pH	5.5-8.5	AATCC TM81

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

3.2.2.1 Color (tape/webbing only). The color of the tape/webbing for the neck and waist straps shall approximate the color of the coated cloth after dusting or, as an alternate, green in accordance AMS-STD-595A Federal Standard Color # 34094 (Camouflage Green 483) unless otherwise specified in the contract or purchase order.

3.2.3 Thread. The thread shall conform to A-A-59963, Type I, twisted soft multiple cord or Type II, twisted bonded multiple cord, Class 1, Subclass B (non-wicking finish), Tex size 45. Color shall approximate apron material. Any lubricant or finish shall not stain the end item.

3.2.4 Grommets. The apron shall have four (4) grommets, which shall be located at the bib and waist corners (see Figure 1). The grommets shall be in accordance with NAM16491, Type II, Class 3, Size 8-10 millimeters (3/8-inch in diameter nominal).

3.2.4.1 Reinforcement patches. The apron shall have four (4) reinforcement patches located on the inside at the bib and waist corners where the grommets are positioned (see Figure 1). The material for the patches shall be the same material as the apron, rubber coated spun polyester, in accordance with 3.2.1.1.

3.2.5 Labels. The back side of each apron shall be stamped with the following information using 1/4-inch minimum height indelible white characters:

ITEM DESCRIPTION
CONTRACT NUMBER
NATIONAL STOCK NUMBER (NSN)
DATE OF MANUFACTURER
SUPPLIER'S NAME

3.2.5.1 Bar coded hang tag. Each apron shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags will have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and will be attached to the item and shall be clearly legible and readable by a scanner. The barcoding element shall be a 13 digit National Stock Number (NSN) along with respective Universal Product Code (UPC) bar code. The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified, and is shall not cause damage to the item..

3.3 Patterns. Commercial patterns shall be used. They shall conform to the design requirements of 3.1.

3.4 Construction. Construction of the garment shall be according to good commercial practices, and conform to the design in 3.1 and the dimensions specified in 3.5.

3.5 Dimensions. The dimensions shall be as specified in Table IV and Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

TABLE IV. Dimensions (inches).

Location or designated component	Dimension	Tolerance
A) Bottom width, edge to edge	34-5/8	±3/4
B) Side length, waist to bottom edge	36-7/8	±3/4
C) Length, neck edge to bottom edge	48	±3/4
D) Bib width, edge to edge	11-3/8	±1/4
E) Sweep width, neck to edge to waist edge	11-5/8	±1/4
F) Grommet placement	1-inch from all designated corners	±1/8

3.7 Toxicity. The finished apron shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.7.1. Chemicals recognized by the Environmental Protection Agency (EPA) as human carcinogens shall not be used.

3.7.1 Toxicity test. When required (see 7.4), an acute dermal irritation study and a skin sensitization study shall be conducted. When the results of the studies indicate the raincoat cloth is not a sensitizer or irritant, a Repeat Insult Patch Test shall be performed in accordance with the Modified Draize Procedure (see 7.2.4). If the toxicity requirement (see 3.7) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.4).

3.8 Workmanship. The finished apron shall conform to the quality of product established in this document. The aprons shall be free from defects which would affect its serviceability, appearance and uniformity.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The apron shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The aprons offered, or generic equivalent, must have been sold to commercial market or the Government.

5.3 Visual examination. Each apron shall be examined for the defects listed in Table V when defined as in MIL-STD-1487. Sampling procedures shall be as defined in ASQ/ANSI Z1.4. The lot size shall be expressed in units of aprons. The sample unit shall be one (1) apron.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

TABLE V. Visual examination defects.

Material defects: Any hole, cut, abraded are, tear or rip; any spot, stain or foreign matter on outside; any peeling, cracking, sticking, flaking or excess coating compound; any blisters, pits abrasions or tackiness. Color not as specified or not uniform due to discoloration, any shaded part, any objectionable odor.
Seams and stitching: Loose or tight stitching tension, broken or missing thread or stitch, needle chew or improper Stitching, any open seams; any part caught in an unrelated operation or stitching, raw edge, thread breaks, thread ends not removed, pulled or snagged stitches.
Workmanship: Any component part omitted, dusting powder omitted, measurement of item not as specified; design not as specified.
Labels: Label(s) missing, incorrect, or illegible; bar code or UCP code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item, bar code label causes damage to the item.
Packaging: Not packaged in accordance with the contract or purchase order.

5.4 Dimensional examination. The finished apron shall conform to the dimensions specified in Table IV when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) apron.

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.5).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order (see 7.5).

7. NOTES.

7.1 Source of Government documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.2 Source of non-Government documents.

7.2.1 AATCC Standards are available for purchase online at https://www.aatcc.org.

7.2.2 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://www.asq.org.

7.2.3 ASTM Standards are available for purchase online at https://www.astm.org.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

7.2.4 Modified Draize Procedure (Repeat Insult Patch Test): Principles and Methods of Toxicology, A Wallace Hayes (editor) is available online at. https://www.crcpress.com.

7.2.5 SAE International, (AMS-STD-595A, color chips) are available online at https://www.sae.org.)

7.3 Intended use. The item is intended to be used as utility bib apron by military personnel.

7.4 Ordering data. The contract or order should specify the following:


a. Title, number, and date of this commercial item description
b. Color required (tape/webbing only) (see 3.2.2.1)
c. When toxicity testing is required (see 3.7 and3.7.1)
d. Product conformance provisions (see 5.1)
e. Acceptance criteria (see 5.5)
f. Packaging requirements (see 6.)

7.5 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for stated requirement.

7.6 Key words.

Abattoir worker
Butcher
Coating
Dusting powder

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

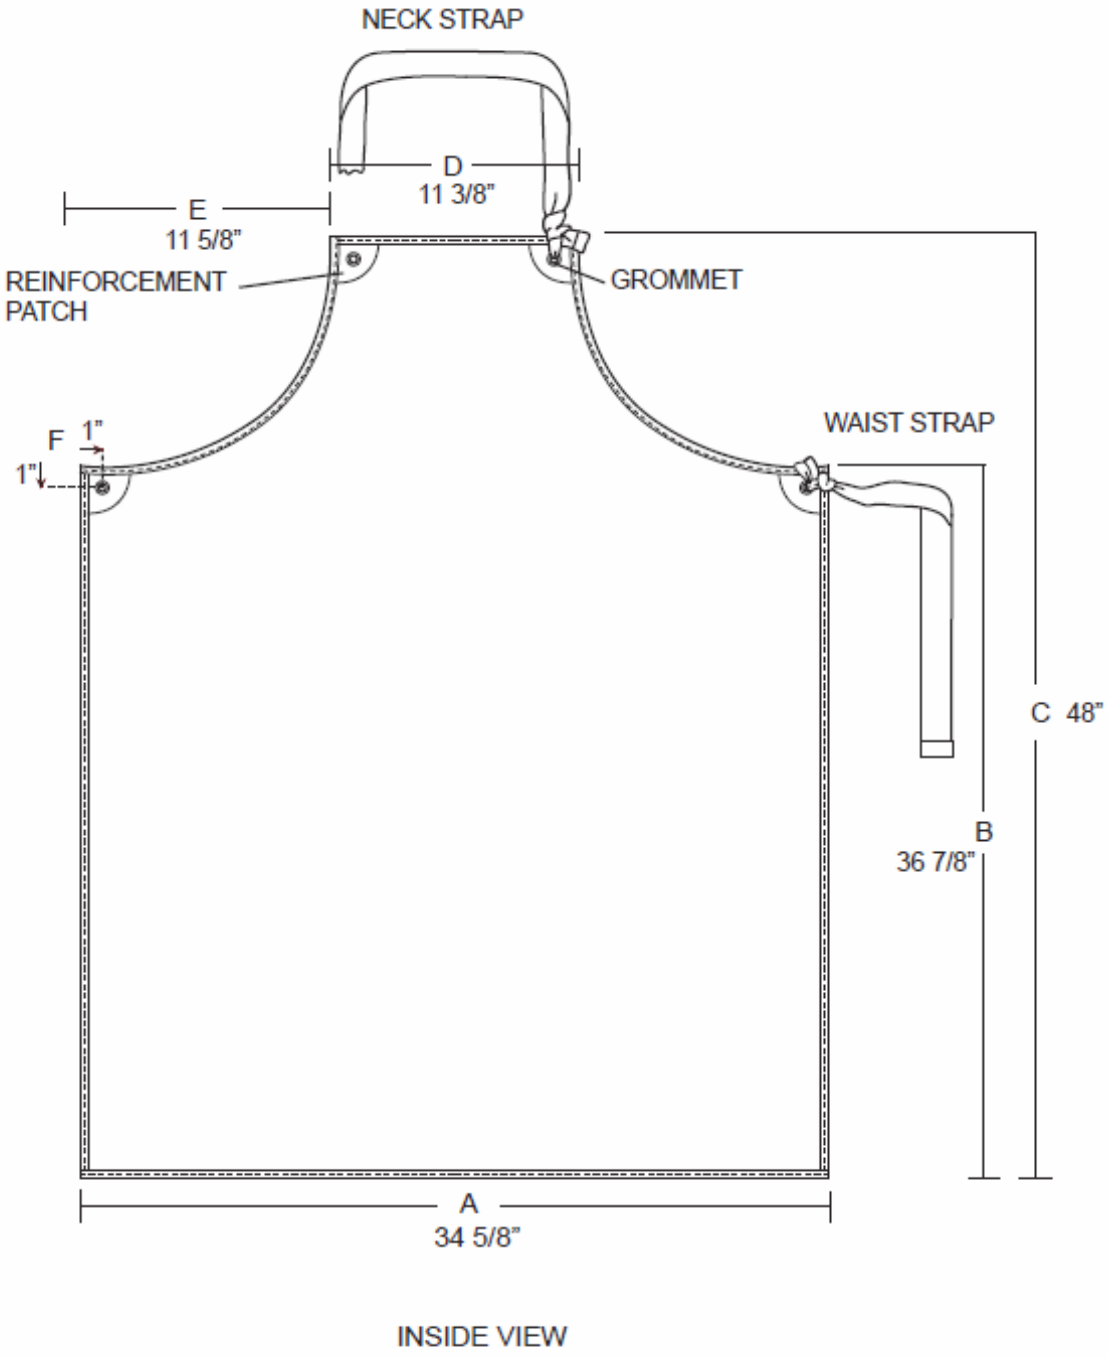

NOTE: Back side shown. All dimensions are in inches.

FIGURE 1. Apron, Utility Impermeable Rubber Coated Fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTVITY:
GSA-FAS

Custodians:
Army - GL
Navy - NU
Air Force - 11

Preparing Activity:
DLA-CT

Review activities:
Army - MD
Navy –CG-1, MC

(Project: 8415-2020-056)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.