INCH-POUND

A-A-55065
July 13, 1992

COMMERCIAL ITEM DESCRIPTION

APRON, MEAT CUTTER'S

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-A-40032.

Abstract. The apron shall be of one type of protective mesh.

Salient Characteristics. The apron shall be used to give protection to the chest, abdomen, groin, and front of thighs of meat cutters. The apron shall be in accordance with Figure 1.

Materials. The specified materials shall conform to applicable documents and requirements specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer for his meat cutter's aprons provided that the completed items conform to all provisions of this document. Recycled material may be used for nontextile components.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal(DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:41Z
Check the source to verify that this is the current version before use.

Thread. The thread shall be approximately a 16/4 cotton count with a breaking strength of 6.8 pounds minimum.

Brass, sheet or strip. Brass, sheet or strip, shall conform to a high quality commercial product.

Eyelets and washers. Eyelets and washers shall be fabricated of brass and finished as specified.

Eyelets. Eyelets shall be rolled flanged type with an outside diameter of not less than 0.20 inch, a flange diameter of not less than 0.34 inch, and a metal thickness of not less than 0.011 inch.

Washers. Washers shall be round flat type with an outside diameter of not less than 0.40 inch, a thickness of not less than 0.018 inch, and an inside diameter to accommodate the eyelets.

Solder. Solder shall be composed of 45.0 $\pm$ 1.0 percent silver, 15.0 $\pm$ 1.0 percent copper, 16.0 $\pm$ 2.0 percent zinc, 24.0 $\pm$ 1.0 percent cadmium and traces of other elements.

Cotton webbing. The cotton webbing shall be 1 inch wide, natural, medium heavyweight and weigh 0.96 ounces per linear yard.

Keeper clamps. The keeper clamps shall be 1 inch with loops for use with cotton webbing except that the finish shall be decorative nickel plate.

Snaphooks. The snaphooks shall have a cast body made of brass or steel.

Dee rings. Dee rings shall be made from brass or steel wire, 1" inch x 7/8", except that the finish shall be decorative nickel plate.

Label. The label shall be an identification label for garments covering marking, direct printing, stamping, or stenciling.

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/2 inch for joining seams. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

Construction. The construction shall conform in all respects to Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

Metal mesh. The metal mesh shall be formed from the ring and square, 4 prong stamping of the brass and assembled as shown on Figure 1. The prongs of the square stamping shall be soldered.

Eyelets and washers. The eyelets shall be inserted through the washers, the webbing, and the metal mesh and set as shown on Figure 1. The eyelet holes through the cotton webbing, shall be smaller than the outside diameter of the eyelet shank so that the eyelet shank must be forced through the webbing. The diameter of the eyelet holes in the metal mesh shall be not more than 0.005 inch larger than the outside diameter of the eyelet shank.

Finish. The finish on all metal components shall be decorative nickel plate, nominal 0.0001 inch thickness.

Workmanship. After completion, the finish aprons shall be thoroughly cleaned, and all loose thread, and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices.

The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract.

Examination. Lots of aprons shall be inspected in accordance with "Sampling Procedures and Table for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The inspection level for visual examination shall be II and the AQL 2.5. The sample unit is one apron.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The inspection lot. The inspection level shall be 5.2 and the AQL shall be 2.5.

Examination	Defect
Material	Missing, damaged, not as required.
Content	Number of aprons per shipping container is more of less than required.

Defects. The apron shall be examined for the following defects: any hole, cut, tear, color not as specified; any spot or stain (outside); thread ends not removed; label missing, incorrect, or illegible; measurement of item not as specified; Soldering: Cold solder joints (joints not completely sealed); Not clean and free of embedded foreign matter; Excess solder and flux not removed; Finish: Nickel plate not plated (metal parts); any visible blister, pit, porosity, or indication of burning; Any nodule or excessive edge buildup, plating not adherent; any component missing or misplaced; operation omitted or not properly performed; two or more rings not engaging prongs from appropriate stampings as specified except the sides of the apron; Any ring not engaging prongs from four separate stampings as specified except, at the sides of the apron; Any prongs on one stamping not joined together by solder; Two prongs on two or more stampings not joined together by solder; Any sharp burr edge or protrusion; Any component or assembly malformed; Attachment of any webbing border piece or strap to apron not accomplished as specified; Any cut, hole, or tear in webbing components: - where dee ring is attached or where keeper clamp or spring snap is attached in any area other than that specified above.

Packaging.

Overseas.

Packaging. Each apron shall be folded/roll to approximately 18 by 3 inches.

Packaging. Twenty aprons shall be packed in a fiberboard box conforming to style RSC-L, GRADE 275 OF PPP-B-636. The inside dimensions of the box shall be approximately 18-1/2 inches in length, 12 inches in width and 10 inches in depth The box shall be closed in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil - Downloaded: 202640-26T09:41Z
Check the source to verify that this is the current version before use.

Palletization. Boxes shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D, or film bonding means F or G. Pallet pattern shall be number 7 in accordance with the appendix of MIL-STD-147.

Marking. Marking shall be in accordance with MIL-STD-129.

Domestic.

Packaging, Packing, Palletization and Marking. Packaging, Packing, palletization and marking shall be in accordance with ASTM D 3951.

Note: Each shipping container shall contain only one National Stock Number (NSN).

Unitized loads, placing boxes on pallets, shall be used whenever total quantity for shipment to one destination exceeds 250 pounds (excluding the pallet) or 20 cubic feet. Pallets shall have a length of 40 inches and a width of 48 inches. Pallet loads, including the pallet, shall not exceed 54 inches in height, 43 inches in length and 52 inches in width.

The containers shall be bonded onto wing type commercial 4-way entry pallets.

Note: All palletized loads shall contain only one NSN, to the maximum extent possible. When there is less than a pallet load per NSN, pallets may have containers not of the same NSN, but the pallet shall be clearly marked "mixed" and each applicable NSN shall be listed together with its total quantity.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

I Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Custodian:
Army - GL
Air Force - 99

Civil Agency Coordinating Activity
GSA - FSS

Preparing Activity:
DLA - CT

Review Activity:
Army - MD
Air Force - 82

Project No. 8415-0877

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

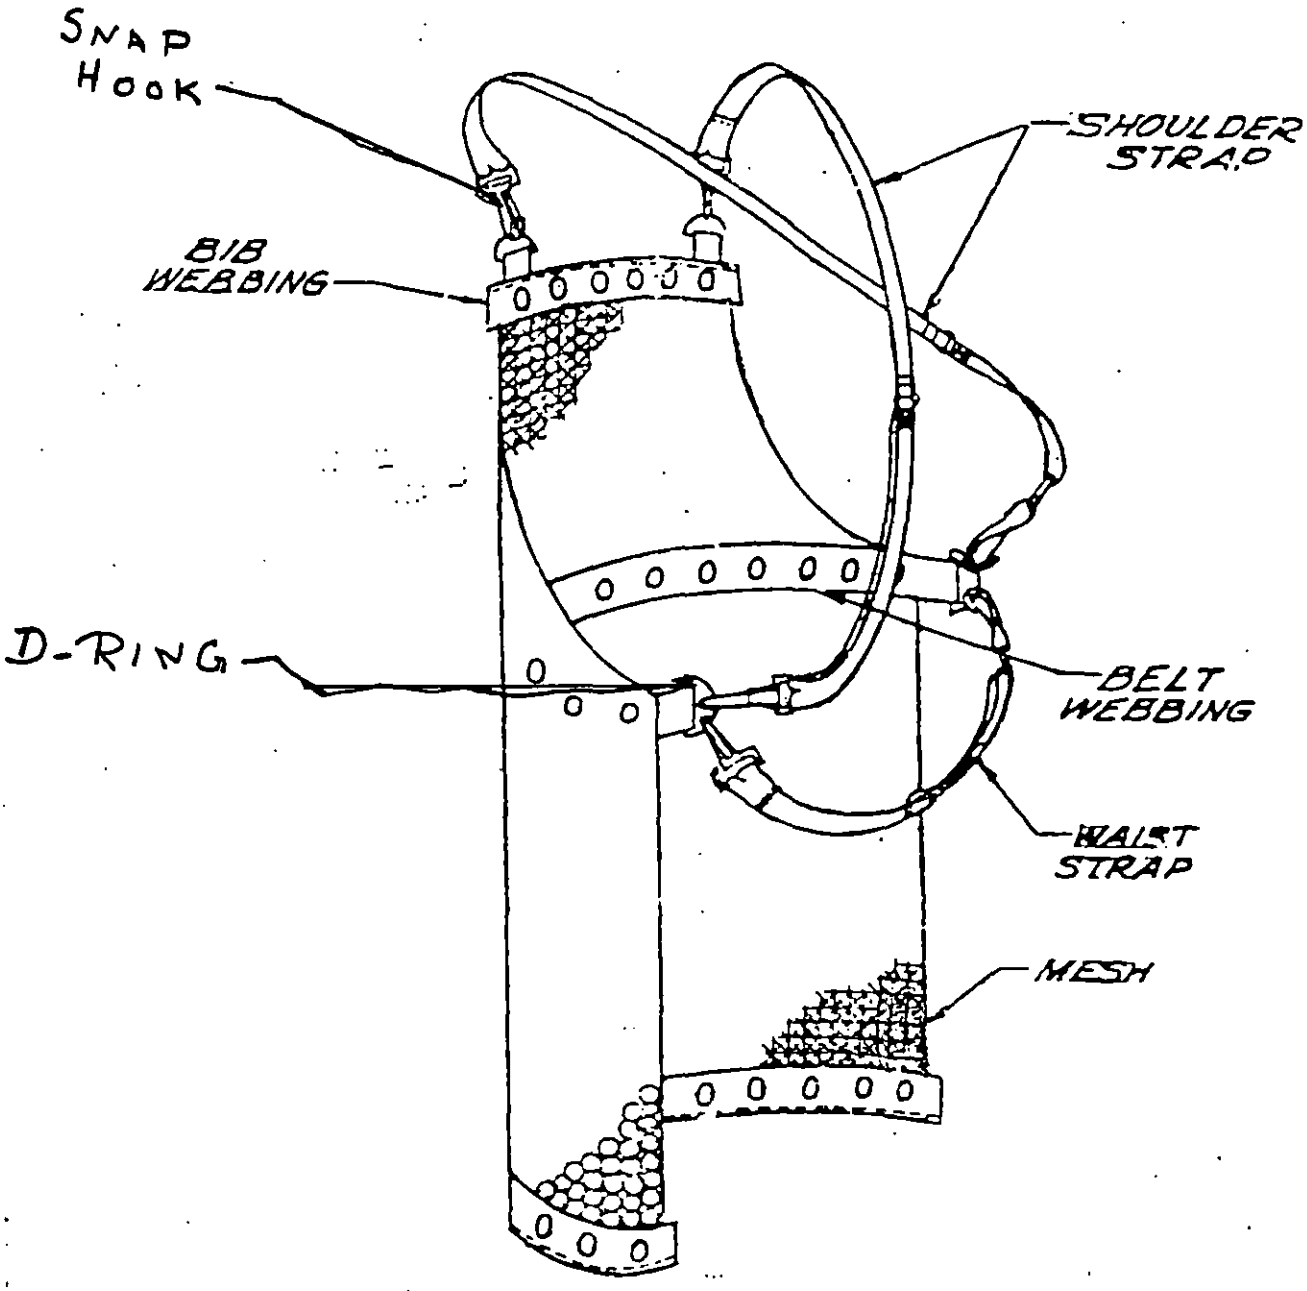


Figure 1 Apron, Meat Cutter's

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-55065	2. DOCUMENT DATE (YYMMDD) 92-07-13

3. DOCUMENT TITLE
Apron, Meat Cutter's

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (*YYMMDD*)

8. PREPARING ACTIVITY

a. NAME Defense Personnal Support Center	b. TELEPHONE (*Include Area Code*) (1) Commercial (215) 737-8105	(2) AUTOVON 444-8105
c. ADDRESS (*Include Zip Code*) 2800 S. 20th Street DPSC-FSSD Philadelphia, Pa 10101- 8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:41Z
Check the source to verify that this is the current version before use.