INCH-POUND

A-A-55068
20 September 1991

COMMERCIAL ITEM DESCRIPTION

JERSEY, FLIGHT DECK CREWMAN'S

This Commercial Item Description is authorized for use in preference to MIL-J-82281(NU).

Description.. The jersey shall be a pullover type with a 5 inch high turtle neck collarette and long sleeves, having double thickness collarette and wristlets made from tubular or flat knit material. The back collarette and the shoulder seams shall be reinforced by one continuous length of binding approximately 5/8 inch wide, made of basic material cut in the wale direction. The binding shall extend across the back of the collarette, from shoulder seam to shoulder seam and the ends shall be caught in the armhole seams. The wristlet shall be 3-1/2 (+ -1/4) inches wide when positioned flat and measured between the folded edges and 3 (+ - 1/4) inches long when measured vertically between the top seam and the bottom folded edge of the wristlet. The thread shall be a soft finished cotton, size 40 or 50, 2 or 3 ply, dyed to match the shade of the basic cloth. The bottom of the jersey shall have a finished hem of uniform width. The body shall be either a two piece construction, with side seams or a one piece tube. The jerseys shall be provided in seven colors, as specified.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

Material. The jerseys shall be made of pre-shrunk 1 X 1 circular rib knit cotton conforming to the following requirements:

Characteristic	Requirements	Test Method
Bursting strength (minimum)	60 lbs	ASTM D 3787-89
Colorfastness:		
Laundering	good	AATCC-61-1986 1/2/
Perspiration	good	AATCC-15-1985 3/
Dry crocking	good	AATCC-8-1988
Wet crocking	good	AATCC-8-1988
Light	good	AATCC-16A-1988 4/
Weight (oz/sq yd)	7 oz (+/_ 1.0)	ASTM D 3776-85
Wales per inch (minimum)	20	ASTM D 3887-80
Courses per inch (minimum)	35	ASTM D 3887-80

1/ Only the stain on the cotton fibers of the color transfer cloth shall be evaluated.

2/ Procedure 3A of cited Test Method covers laundering in hot water.

3/ Report the results of whichever specimen has the lowest adjective rating (acid or alkaline).

4/ 20 Standard Fading Hours.

Pre-shrinkage treatment. The knitted cloth shall be pre-shrunk by a mechanical process prior to cutting into garments. The pre-shrinkage process used shall not be identified by name or trademark on the finished garment or package.

Sizes. The jerseys shall be provided in the following sizes:

Small (34-36)	Medium (38-40)
Large (42-44)	Extra Large (46-48)

NOTE: Sizes (Small, Medium, Large, and Extra-Large may be abbreviated as SM, MED, LG, and XLG).

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

Label. The label shall be located on the outside back hem area, sewn on all 4 sides. A commercial type label is acceptable provided that an additional printed cloth label containing the contractor's name, contract number, size and NSN is caught in the stitching of the commercial label. The commercial label shall include fiber content information. The following laundering instruction information shall also be included:

Machine Wash - Hot Water -No Bleach
Tumble dry
or
Use NAVEDTRA 414-01-45-81, Formula II

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides a seam allowance of 5/16 inch for stitched and joining seams.

Dimensional stability. The finished jerseys shall not shrink nor elongate more than 8.0 percent in the overall length, sleeve length or chest width when tested in accordance with AATCC Test Method 135-1973. The jerseys shall not be moistened or pressed before measuring. The jerseys shall be conditioned after drying for one hour in a relaxed supported state before measuring. Measurement shall be taken to the nearest 1/4 inch and shrinkage or elongation reported to the nearest 0.1 percent.

Colors The color of the finished cloth shall be as specified below. It shall approximate a good match to the standard sample.

Color	Color Number
White	(Unbleached)
Blue	3355
Green	3432
Yellow	3512
Brown	3728
Red	3804
Purple	3905

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

Sizes and Measurements. The finished jerseys shall conform to the measurements below.

Table I - Finished Measurement

Size		Overall Length (A)	Chest Width (B)	Sleeve Length (C)	Collarette Opening (D)
Small	(34-36)	26-1/2	31	23	7-1/4
Medium	(38-40)	27-1/2	34	24	7-1/4
Large	(42-44)	28-1/2	37	25	8
X-Large	(46-48)	29-1/2	40	26	8
Tolerance		± 1/2	± 1	± 1/2	± 1/4

NOTE: Refer to Figure 1 for A, B, C, and D measurements. All measurements shall be taken with the jersey flat and smooth and in a relaxed condition with the front facing up, with the sleeves extended horizontally and perpendicular to the body.

A. Overall length - Measure from intersection of the collarette seam and the shoulder seam to the bottom edge of the hem.
B. Chest width - Twice the measurement across front, approximately 1 inch below armhole seam from folded edge to folded edge.
C. Sleeve length - Measure along outside folded edge of sleeve from the intersection of the armhole seam and shoulder seam to the bottom of the wristlet.
D. Collarette opening - Measure along top edge of collarette with the jersey in a flat relaxed position, superimposing the front half on back half.

Workmanship. After completion, the finished jerseys shall be thoroughly cleaned, and all loose thread, lint, and foreign matter removed. The items shall be uniform in quality and shall be free from irregularities or defects which adversely affect appearance, performance, reliability, or durability.

Product Demonstration Model Offerers are required to submit two (2) jerseys of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Responsibility for Inspection. The supplier is responsible for assuring the product conforms to the requirements. Jersey lots will be inspected to determine conformance with the Commercial Item Description and the successful offerer's technical proposal as negotiated. Acceptability of jersey lots will be determined by the use of "Sampling Procedures and Tables for Inspection by Attributes", ANSI Z1. 4, published by the American Society for Quality Control. Sampling procedures will be designated by the Government at the time of award. The sample unit is one jersey. The jersey will be examined for commercial type defects only.

Defects. The jersey shall be examined for the following defects: any hole, cut, tear, mend, or drop stitch; broken or missing thread or stitch; needle chew; loose knitting; slubby yarn; thread color not as specified; shaded part, off shade, wrong shade, or shade variation; spot, stain, streak or knitted in waste; permanent fold, pleat, or crease; thread ends not trimmed; any component part not as specified or omitted; seam puckered, distorted, pleated, irregular or open; loose or tight stitch tension; seam allowance not as specified; label omitted, incorrect, illegible or misplaced; measurement of item not as specified; collarette or wristlet not double thickness or not uniform in width; hem width not uniform throughout; sleeve lengths unequal by more than 1/2 inch; component part full, tight, twisted.

Packaging, Packing, and Palletization.

Packaging, packing and palletization shall be in accordance with ASTM-D 3951-90 (Standard Practice for Commercial Packaging).

Note: Stock within each shipping container and on each pallet load shall contain only one NSN.

Preservation. Each jersey shall be folded in accordance with good commercial practice, visible, and stacked into securely tied bundles of five each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the currentversion before use.

Packing. Fifty jerseys (10 bundles of 5 each), of one size and color only, shall be packed into a shipping container. Bundles shall be arranged so that they are stacked flat, two in length, one in width, and twenty-five in depth within the shipping container, with the longer dimension parallel to the end panels of the box. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

Palletization. Unitized loads shall not exceed 43 inches x 52 x 54 inches (L x W x H). Containers shall be bonded onto commercial wing type pallets, 40 inches long by 48 inches wide (top and bottom deck boards shall be 7/8 inch thick, 48 inches long, and be mounted on a minimum of three equally spaced 2 x 4 stringers so that their edges are flush with the stringer ends and their ends project approximately 3-1/2 inches beyond the stringer sides).

Prohibited Packing Materials. The use of asbestos, excelsior, newspaper or shredded paper (all types including waxed paper, computer paper and similar hygroscopic or non-neutral material) is prohibited.

Notes. The procurement document will refer to the packaging requirements of this Commercial Item Description using the requirements codes of MIL-STD-2073-1 and MIL-STD-2073-2.

Custodian:

Navy - NU

Review Activity:

Navy - CG, AS

User Activity:

Navy - SH

Preparing Activity:

DLA-CT

Project No.
8415-N857

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

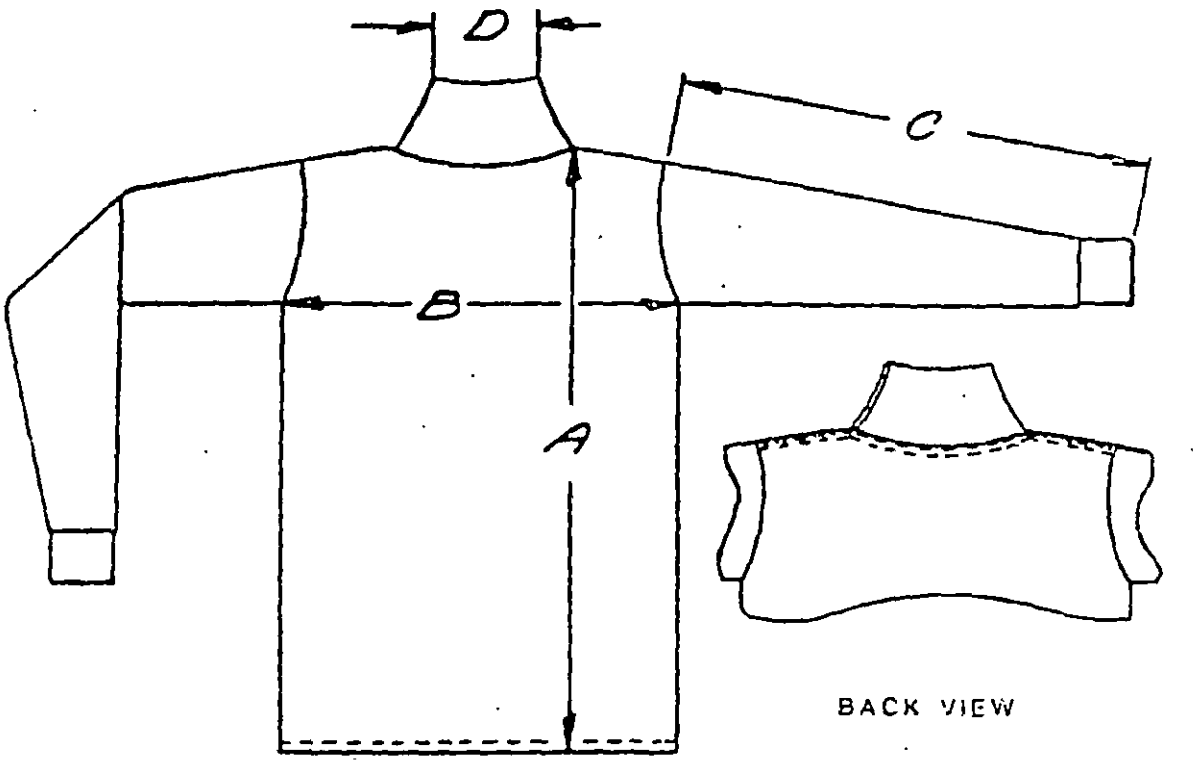


Figure 1 - Jersey, Flight Deck Crewman's

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55068	20 September 1991

3. DOCUMENT TITLE
Jersey, Flight Deck Crewman's

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.