INCH-POUND

A-A-55073
14 August 1992

COMMERCIAL ITEM DESCRIPTION

NECKTIE, WOMAN'S (Coast Guard)

The General Services Administration has authorized the use of this Commercial Item Description in preference to Military Specification MIL-N-87007.

Abstract. The necktie is intended for use by female personnel of the Coast Guard and Coast Guard Auxiliary.

Classification. The necktie shall be of one size and of the following types:

Type I - Coast Guard
Type II - Coast Guard Auxiliary

SALIENT CHARACTERISTCS

General description. The necktie shall be pre-tied, fold over style with two racing stripes, attached to an adjustable neck band. The Type I necktie shall have one 5/16 inch wide blue racing stripe ribbon stitched 1/4 inch from one 1-1/2 inch wide red racing stripe ribbon. The Type II necktie shall have one 5/16 inch wide and one 1-1/2 inch wide blue racing stripe ribbon stitched as above. These ribbons shall be positioned according to the pattern marks with the narrower ribbon

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

closer to the neck of the wearer. All stitching shall have 10-12 stitches per inch.

The finished neck band shall be 1/2 inch wide and 19-1/4 inches long. The neck band shall be positioned on the inside of the tie. The center of the tie shall be 7-1/2 inches from the hook end of the neck band. A pleat, folded left over right as worn, shall be formed at the center of the tie. The tie shall finish 1-1/4 inches wide at the center. The neck band shall be boxstitched to the tie 1/16 inch from edges. The necktie, folded over the neck band, shall be tacked to the bottom edge of neck band, no stitching shall show on the front of the necktie.

Thread neck band through hook opening and form a 1/2 inch loop, stitching across neck band width twice to secure. The hook shall be on the right end of neck band and away from the wearer when worn. The left side of neck band shall be threaded through slider over the center bar, through the eye, and back through the slider center bar. The end of neck band shall be stitched through two plies 3/4 inch from slide bar.

Material. The basic material shall be a polyester/cotton blend broadcloth with durable press finish, Shade Blue 1550 cnforming to Class 1 of MIL-C-43992. Class 1 of Cloth, Broadcloth, Polyester/ Cotton, Durable Press has a minimum weight of 3.5 and a maximum weight of 4 ounces (per sq. yd.).

The ribbon for the racing stripes shall be grosgrain polyester ribbon conforming to 5/16 inch width in Blue, Shade 3366, for the narrow stripe; and for the wide stripe, the width shall be 1-1/2 inch in Blue, Shade 3366, or in Red, Shade 3805.

The thread shall be cotton-covered polyester conforming to type I, ticket No. 70 (needle), 2 ply of A-A-50199 (Thread, Polyester Core, Cotton or Polyester covered). The shade shall be white or match the basic material. When stitching the ribbon, the thread shall match the appropriate ribbon. When dyed thread is used, it shall show "good" fastness to laundering and light when tested as specified in A-A-50199.

Label. Each necktie shall have a combination identification/ instruction label conforming to Type VI, classes 1 and 3 of DDD-L-20 sewn on all four sides on the back of the tie so it is against the wearer. The label shall be centered and approximately 6 inches from the lowest point. The printing shall show fastness



Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

to laundering and shall bear the following inscription:

| | | |
|---|---|---|
| Name of Item: | Necktie, Woman's (CG) Type I | (Example) |
| Fiber Content: | 65% Polyester/35% Cotton | |
| Contract No: | DLA 100-00-0-0000 | (Example) |
| Stock No: | 8445-00-000-0000 | (Example) |
| Name of Contractor: | | |
| Name of Manufacturer: | (if different than Contractor) | |

LAUNDERING INSTRUCTIONS

Launder by hand or machine (gentle cycle) using warm water and mild soap. DO NOT BLEACH. Do not squeeze or wring-out. Press with warm iron.

Hardware.

Tension slide. The tension slide shall be nickel plated steel, 1/2 inch inside opening conforming to part number 209 of the Waterbury Buckle Company (952 South Main Street, Waterbury, Connecticut 06720), or a functionally interchangeable equivalent. Information regarding the Waterbury Buckle Company is furnished to indicate a possible source of supply. Any manufacturer's item which is equal to the referenced commercial type item will be acceptable.

Eye. The eye shall be nickel plated steel, 1/2 inch inside width conforming to part number 122 of the Waterbury Buckle Company, or a functionally interchangeable equivalent.

Hook. The hook shall be nickel plated steel, 1/2 inch inside opening conforming to part number 33 of the Waterbury Buckle Company, or a functionally interchangeable equivalent.

Patterns. The government shall furnish a single size pattern. The component parts shall be cut from the basic material (broadcloth, polyester/cotton blend cloth, durable press, Blue, Shade 1550.) The pattern provides for 5/16 to 3/8 inch for all seam allowances. The government's pattern shall be used to make the contractor's working patterns. The government's pattern shall not be altered in any way. The working patterns may be modified to accommodate automation; however, if the working patterns are modified the design and measurements must be maintained as intended by the government's pattern.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. The Product Demonstration Models will be retained by the government.

The manufacturer's approved demonstration model shall be used as a manufacturing standard for conformance to the quality, workmanship and style requirements of this document and patterns. One Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

QUALITY ASSURANCE

Responsibility of Inspection. The contractor is responsible for assuring the neckties conform to the requirements of this document and the demonstration model. The contractor is also responsible for both in-process and final inspection for the entire contract quantity. The Government reserves the right to check any necktie(s) at any time during or after production for design, construction, workmanship, appearance, quality, and conformance to the Demonstration Model and finished dimensions on figure 1. Defective items shall be adjusted or replaced by the contractor. Quality control shall be performed in the following area:

a. Assembly areas.
b. One hundred percent final inspection for conformance to the approved demonstration model and this document prior to packaging and shipping.

First Lot. A mass production first lot consisting of not less than 100 items shall be submitted and inspected for compliance with the design, construction, workmanship, appearance, and dimensional requirements stated herein and with the approved Demonstration Model.

Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this Commercial Item Description; and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Examination. Lots of neckties shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The inspection level for visual examination shall be in accordance with ANSI/ASQC Z1.4. The inspection level shall be I and the Acceptable Quality Level(AQL), expressed in terms of defects per hundred units, shall be 4.0. The lot size shall be expressed in units of one necktie. The sample unit is one necktie. The necktie shall be examined for the following defects: any hole, needle chew, cut, or tear; weakening defect (i.e., slub, smash, float), any part shaded, any mend or burn, not material specified; any spot or stain on front or back of tie; thread ends not trimmed; label missing, incorrect or illegible; measurement of item not as specified.

Dimensional Examination. The finished necktie shall conform to the dimensions specified: neckband shall be 1/2 ($\pm$ 1/8) inch wide and 19-1/4 inches in length. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one necktie; the inspection level shall be in accordance with ANSI/ASQC Z1.4.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580 to the maximum extent practicable.

Certification of Compliance. A certificate of compliance will be acceptable for stated requirement(s).

Defects. After the finished neckties have been thoroughly cleaned with all loose thread, lint, and foreign matter removed, they shall be examined for the following defects: any hole, cut, tear in the material; any broken or missing thread or stitch; thread color not as specified, any spot or stain, or woven-in waste; thread ends not removed or trimmed; permanent fold, pleat, or crease; any component part not as specified or omitted; seam puckered, distorted, pleated, irregular or open; loose or tight stitch tension; broken or missing eye, hook or tension slide; hardware: improper size or type; label missing, incorrect or illegible; measurement of item not as specified.

PACKAGING

Packaging, Packing, Marking, and Palletization.

Packaging. Each necktie shall be placed flat with the top edge even with the top edge of a white rectangular shaped paperboard, 4-3/4 inches wide by 6-1/2 inches long. Fold the tie under the paperboard and secure it with a paper band. Insert the tie unit in a snug-fitting clear polyethylene film bag. Bag closure can be heat sealed



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

(with 1/4 inch hole in one corner to allow air to escape) or by means of a tuck or reverse flap.

Packing. One-Hundred and twenty-five (125) neckties of one type only, packaged as specified, shall be packed flat in a fiberboard shipping container assembled, closed and reinforced conforming to Type CF, Class Domestic, Variety DW, grade 200, Size 1A of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

Marking. Marking shall be in accordance with MIL-STD-129.

Palletization. When specified, shipping containers shall be palletized in accordance with load Type Ia of MIL-STD-147. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

Prohibited Packing Materials. The use of asbestos, excelsior, newspaper or shredded paper (all types including waxed paper, computer paper and similar hygroscopic or non-neutral material) are prohibited.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

Applications for copies should be addressed to:
American National Standards Institute
1430 Broadway, New York, NY 10018-3308

ASTM-D 3951 - Standard Practice for Commercial Packaging

Applications for copies should be addressed to:
American Society For Testing and Materials
1916 Race Street, Philadelphia, PA 19103

Civil Agency Coordinating Activity:
GSA - FSS

Custodian:
Coast Guard - CG

Preparing Activity:
DLA - CT

Project No.
8445-0117



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

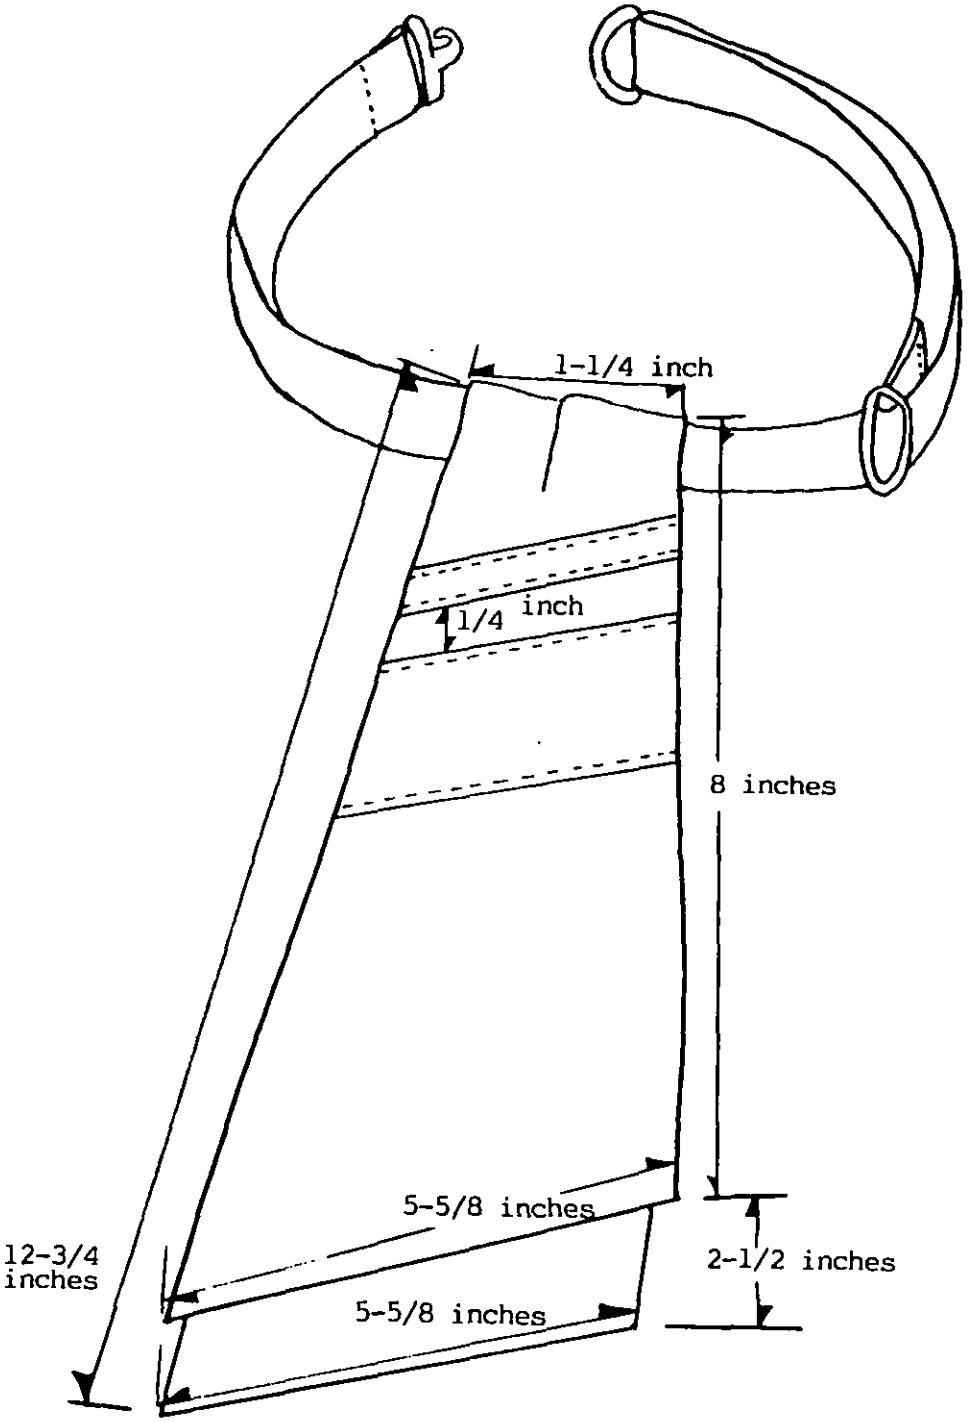



FIGURE 1 NECKTIE, WOMAN'S



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER | 2. DOCUMENT DATE (YYMMDD) |
|---|---|---|
| | A-A-55073 | 92-08-14 |

3. DOCUMENT TITLE: NECKTIE, WOMAN'S (COAST GUARD)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON (If applicable) | 7. DATE SUBMITTED (YYMMDD) |

8. PREPARING ACTIVITY

| a. NAME | b. TELEPHONE (Include Area Code) (1) Commercial | (2) AUTOVON |
|---|---|---|
| DLA-CT | (215) 737-8105 | 444-8105 |
| c. ADDRESS (Include Zip Code)<br>DEFENSE PERSONNEL SUPPORT CENTER<br>DPSC-FSS (Bldg. 12-3-D)<br>2800 S. 20th St., Phila., PA 19101 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 | |

DD Form 1426, OCT 89 — Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.