MILITARY SPECIFICATION

OVEN ASSEMBLIES, WITH QUARTZ CRYSTAL UNITS,

GENERAL SPECIFICATION FOR

This amendment forms a part of Specification MIL-O-55593, 5 April 1969, and is mandatory for use by all Departments and agencies of the Department of Defense.

Page 15

Figure 2: Delete and substitute the following figure 2.

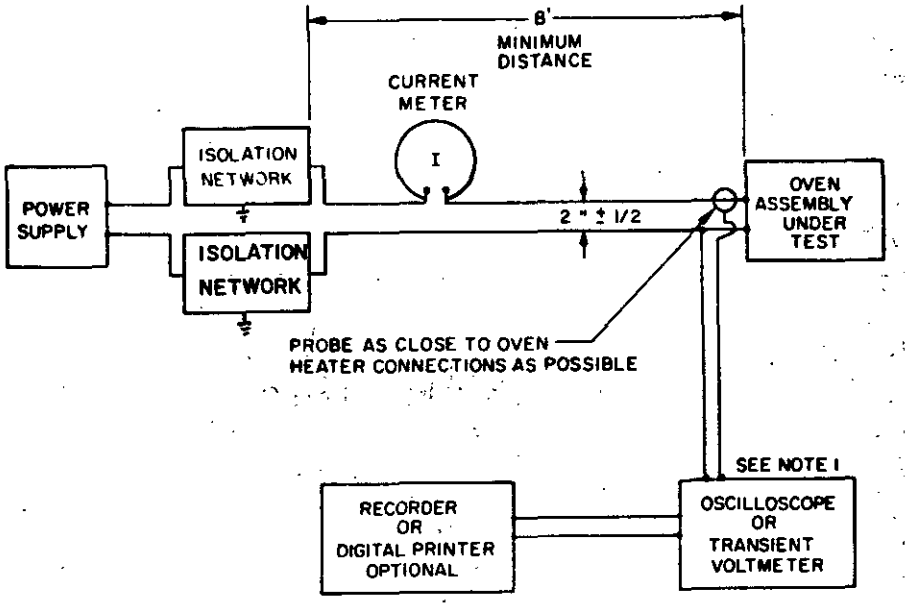

NOTES:
1. Oscilloscope or transient voltmeter shall be of the memory storage type and be capable of detecting and measuring:

Magnitude:	± 1 volt to ± 1000 volts
Width:	50 nanoseconds to 100 milliseconds
PRF:	Single shot to 500 PPS
Input Impedance:	100k ohms min

2. EMI isolation network can be a low pass filter providing 40 to 60 dB stop band attenuation in the test circuit.
3. Power supply shall have low internal impedance.
4. Test shall be performed in a shielded room.
5. Power supply leads may be lengthened for additional inductance.
6. Power leads two inches ±½ above ground plane.

FIGURE 2. Electromagnetic interference test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:40Z
Check the source to verify that this is the current version before use.

L-O-55593

stodians:
.rmy - EL
lavy - EC
.ir Force - 84

view activities:
.rmy - EL, MI, MU, SM
lavy -
.ir Force - 11,
)SA - ES

er activities:
.rmy -
lavy - SH, AS, OS, CG, MC
.ir Force - 17, 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5955-0353)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:40Z
Check the source to verify that this is the current version before use.