
MILITARY SPECIFICATON SHEET


CAPACITORS, FIXED, ELECTROLYTIC (ALUMINUM OXIDE)(POLARIZED), ESTABLISHED RELIABILITY, STYLE CUR92 (INSULATED)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-39018.

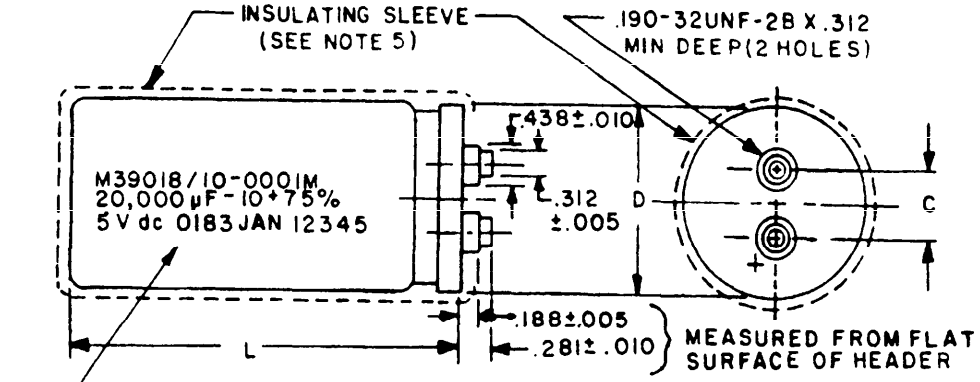

TERMINAL STYLE A

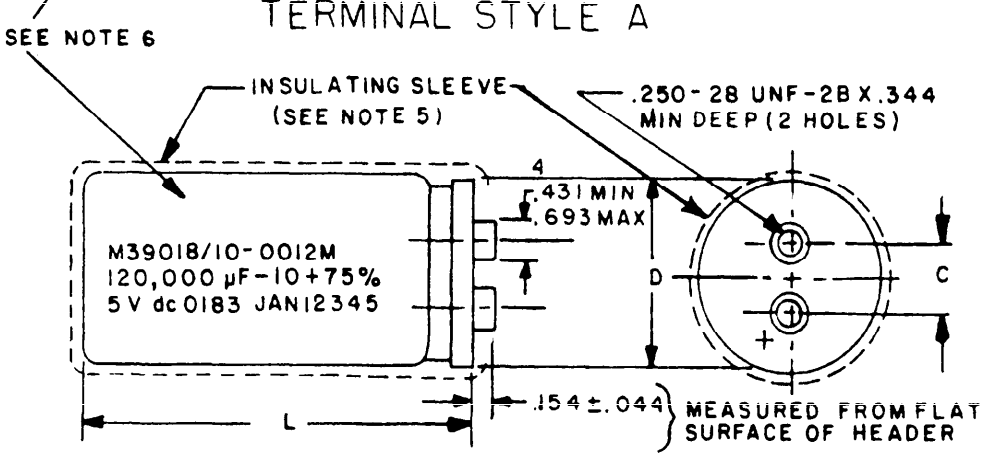

TERMINAL STYLE B



SEE NOTE 4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Capacitors are mounted by means of a wraparound, footed-type bracket.
4. There is an indeterminate resistance between the metal case and the negative terminal.
5. Insulating sleeve thickness shall not exceed .016 and shall overlap the ends of the capacitor body.
6. Example of marking and its relative location on the capacitor body.
7. Terminal screws will not be furnished with capacitors.

FIGURE 1. Style CUR92 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.

CUR92 case code

Case size	Bare case dimensions			Term. style
	L ±.062	D ±.031	C ±.016	
AA	2.125	1.375	.500	A
AB	3.125	1.375	.500	A
AC	4.125	1.375	.500	A
AD	4.625	1.375	.500	A
AE	5.125	1.375	.500	A
AF	5.625	1.375	.500	A
BB	3.125	2.000	.875	A
BC	4.125	2.000	.875	A
BD	4.625	2.000	.875	A
BE	5.125	2.000	.875	A
BF	5.625	2.000	.875	A
CB	3.125	2.500	1.125	B
CC	4.125	2.500	1.125	B
CD	4.625	2.500	1.125	B
CE	5.125	2.500	1.125	B
CF	5.625	2.500	1.125	B
DC	4.125	3.000	1.250	B
DD	4.625	3.000	1.250	B
DE	5.125	3.000	1.250	B
DF	5.625	3.000	1.250	B

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.281	7.14	1.375	34.92
.010	.25	.312	7.92	2.000	50.80
.016	.41	.344	8.74	2.125	53.98
.031	.79	.431	10.95	2.500	63.50
.044	1.12	.438	11.13	3.000	76.20
.062	1.57	.500	12.70	3.125	79.38
.154	3.71	.693	17.60	4.125	104.78
.188	4.78	.875	22.22	4.625	117.48
.190	4.83	1.125	28.58	5.125	130.18
.250	6.35	1.250	31.75	5.625	142.88

FIGURE 1. Style CUR92 capacitors - Continued.

Source: https://assist.dla.mil --Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.

TABLE I. Style CUR92 Capacitors.

DC rated voltage @ 105°C	Capacitance (nom)	DC surge voltage @ 105°C	ESR @ 25°C 120 Hz	ESR @ 25°C 20 kHz	Impedance @ 100 kHz 25°C	Impedance @ 100 kHz -55°C	DC leakage 25°C	DC leakage 105°C	Max. ac ripple current 1/ @ 85°C 120 Hz	Max. ac ripple current 1/ @ 85°C 20 kHz	Case size	Dash number 2/
Volts	µF	Volts	Ohms		Ohms		mA		Amps			
5	20,000	7	.028	.021	.040	.320	.47	4.23	7.2	8.31	AA	0001-
"	37,000	"	.016	.012	.030	.224	.64	5.76	11.1	12.8	AB	0002-
"	54,000	"	.012	.010	.028	.192	.77	6.93	14.4	15.7	AC	0003-
"	62,000	"	.010	.0085	.027	.184	.82	7.38	15.4	16.6	AD	0004-
"	70,000	"	.0095	.0078	.026	.176	.88	7.92	16.3	17.4	AE	0005-
"	78,000	"	.0089	.0073	.026	.176	.93	8.37	16.4	17.4	AF	0006-
"	76,000	"	.012	.010	.027	.110	.91	8.19	15.9	17.2	BB	0007-
"	110,000	"	.0093	.0080	.025	.105	1.06	9.54	20.3	21.9	BC	0008-
"	130,000	"	.0084	.0073	.025	.100	1.16	10.4	22.4	24.0	BD	0009-
"	150,000	"	.0079	.0067	.025	.100	1.26	11.3	24.1	25.6	BE	0010-
"	170,000	"	.0074	.0064	.024	.100	1.34	12.0	24.7	26.3	BF	0011-
"	120,000	"	.011	.0085	.028	.115	1.16	10.4	19.5	22.1	CB	0012-
"	180,000	"	.0078	.0062	.026	.110	1.42	12.7	23.8	26.8	CC	0013-
"	220,000	"	.0069	.0057	.026	.110	1.57	14.1	25.3	27.8	CD	0014-
"	250,000	"	.0062	.0051	.025	.105	1.68	15.1	26.6	28.7	CE	0015-
"	280,000	"	.0058	.0048	.025	.105	1.78	16.0	27.5	29.4	CF	0016-
"	280,000	"	.0078	.0068	.027	.130	1.78	16.0	26.3	26.5	DC	0017-
"	320,000	"	.0070	.0062	.026	.130	1.90	17.1	28.3	28.6	DD	0018-
"	370,000	"	.0065	.0057	.026	.130	2.04	18.3	30.0	30.3	DE	0019-
"	420,000	"	.0061	.0054	.025	.125	2.17	19.5	31.4	31.4	DF	0020-
10	14,000	15	.028	.021	.041	.328	.52	4.68	7.20	8.31	AA	0021-
"	24,000	"	.016	.012	.030	.232	.72	6.48	11.1	12.8	AB	0022-
"	36,000	"	.012	.010	.028	.200	.86	7.74	14.4	15.7	AC	0023-
"	41,000	"	.011	.0087	.027	.184	.93	8.37	15.4	16.6	AD	0024-
"	47,000	"	.010	.0080	.026	.184	.98	8.82	16.3	17.4	AE	0025-
"	52,000	"	.0095	.0074	.026	.176	1.04	9.36	16.4	17.4	AF	0026-
"	50,000	"	.013	.010	.027	.110	1.02	9.18	15.6	17.2	BB	0027-
"	76,000	"	.0097	.0080	.025	.105	1.25	11.2	19.9	21.9	BC	0028-
"	89,000	"	.0088	.0073	.025	.100	1.35	12.1	21.9	24.0	BD	0029-
"	100,000	"	.0080	.0067	.025	.100	1.45	13.0	24.0	25.6	BE	0030-
"	120,000	"	.0076	.0064	.024	.100	1.50	13.5	24.7	26.3	BF	0031-
"	79,000	"	.011	.0085	.028	.115	1.33	11.9	19.5	22.1	CB	0032-
"	110,000	"	.0078	.0062	.026	.110	1.57	14.3	23.8	26.8	CC	0033-
"	130,000	"	.0069	.0057	.026	.110	1.71	15.9	25.3	27.8	CD	0034-
"	150,000	"	.0062	.0051	.025	.105	1.84	16.6	26.6	28.7	CE	0035-
"	170,000	"	.0058	.0048	.025	.105	1.96	17.4	27.5	29.4	CF	0036-
"	170,000	"	.0079	.0068	.027	.130	1.96	17.4	26.3	26.5	DC	0037-
"	200,000	"	.0071	.0062	.026	.130	2.12	19.8	28.3	28.6	DD	0038-
"	230,000	"	.0066	.0057	.025	.130	2.27	20.3	30.0	30.3	DE	0039-
"	260,000	"	.0061	.0054	.025	.125	2.42	21.8	31.4	31.4	DF	0040-
15	7,600	20	.030	.022	.043	.344	.56	5.04	6.98	8.14	AA	0041-
"	13,000	"	.018	.013	.030	.240	.74	6.66	10.5	12.1	AB	0042-
"	19,000	"	.013	.010	.028	.200	.90	8.10	13.8	15.7	AC	0043-
"	22,000	"	.012	.0091	.026	.192	.96	8.64	15.1	17.3	AD	0044-
"	25,000	"	.011	.0085	.025	.184	1.02	9.18	16.3	18.8	AE	0045-
"	28,000	"	.010	.0079	.025	.176	1.09	9.81	16.6	20.3	AF	0046-
"	27,000	"	.013	.011	.031	.115	1.06	9.54	15.2	17.2	BB	0047-
"	42,000	"	.0099	.0080	.026	.105	1.30	11.7	19.3	21.5	BC	0048-
"	49,000	"	.0090	.0073	.025	.100	1.41	12.6	20.7	22.9	BD	0049-
"	56,000	"	.0083	.0067	.025	.100	1.50	13.5	21.8	24.1	BE	0050-
"	63,000	"	.0078	.0064	.025	.100	1.60	14.4	22.5	24.7	BF	0051-
"	58,000	"	.013	.011	.029	.110	1.40	12.6	17.3	18.9	CB	0052-
"	87,000	"	.0090	.0080	.026	.110	1.71	15.3	21.3	23.0	CC	0053-
"	100,000	"	.0079	.0070	.026	.110	1.84	16.5	22.7	24.3	CD	0054-
"	110,000	"	.0072	.0065	.026	.105	1.93	17.3	25.0	26.2	CE	0055-
"	130,000	"	.0066	.0060	.025	.105	2.10	18.9	26.0	27.8	CF	0056-
"	130,000	"	.0099	.0090	.027	.130	2.10	18.9	25.7	25.9	DC	0057-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-21T18:05Z
Check the source to verify that this is the current version before use.

TABLE I. Style CUR92 Capacitors.

DC rated voltage @ 105°C	Capacitance (nom)	DC surge voltage @ 105°C	ESR @ 25°C 120 Hz	ESR @ 25°C 20 kHz	Impedance @ 100 kHz 25°C	Impedance @ 100 kHz -55°C	DC leakage 25°C	DC leakage 105°C	Max. ac ripple 1/ current @ 85°C 120 Hz	Max. ac ripple 1/ current @ 85°C 20 kHz	Case size	Dash number 2/
Volts	µF	Volts	Ohms		Ohms		mA		Amps			
15	150,000	20	.0086	.0080	.026	.130	2.25	20.2	26.5	26.9	DD	0058-
"	170,000	"	.0078	.0072	.026	.130	2.40	21.6	27.5	27.7	DE	0059-
"	190,000	"	.0070	.0065	.026	.125	2.53	22.7	29.0	29.5	DF	0060-
20	6,400	30	.031	.022	.043	.430	.55	4.95	6.81	8.19	AA	0061-
"	11,000	"	.020	.014	.030	.300	.74	6.66	10.0	11.9	AB	0062-
"	16,000	"	.014	.010	.026	.250	.88	7.92	13.3	15.6	AC	0063-
"	19,000	"	.013	.0093	.026	.240	.95	8.55	14.7	17.2	AD	0064-
"	21,000	"	.012	.0085	.025	.230	1.02	9.18	15.8	18.8	AE	0065-
"	24,000	"	.011	.0080	.025	.220	1.08	9.72	16.0	20.2	AF	0066-
"	23,000	"	.014	.011	.028	.138	1.06	9.54	15.1	17.2	BB	0067
"	35,000	"	.010	.0080	.026	.126	1.29	11.6	19.0	21.5	BC	0068-
"	41,000	"	.0094	.0073	.025	.120	1.39	12.2	20.3	22.9	BD	0069-
"	47,000	"	.0087	.0067	.025	.120	1.50	13.5	21.3	24.1	BE	0070-
"	53,000	"	.0081	.0064	.025	.120	1.59	14.3	22.2	24.7	BF	0071-
"	43,000	"	.013	.011	.029	.138	1.39	12.5	17.2	18.9	CB	0072-
"	64,000	"	.0092	.0080	.026	.132	1.70	15.3	21.1	23.0	CC	0073-
"	75,000	"	.0080	.0070	.026	.132	1.84	16.5	22.6	24.3	CD	0074-
"	86,000	"	.0073	.0065	.026	.126	1.97	17.7	24.5	26.2	CE	0075-
"	96,000	"	.0067	.0060	.025	.126	2.08	18.7	25.9	27.8	CF	0076-
"	96,000	"	.010	.0090	.027	.156	2.08	18.7	25.6	25.9	DC	0077-
"	110,000	"	.0087	.0080	.026	.156	2.23	20.0	26.5	26.9	DD	0078-
"	120,000	"	.0078	.0072	.026	.156	2.32	20.8	27.5	27.7	DE	0079-
"	140,000	"	.0070	.0065	.026	.150	2.51	22.5	28.8	29.5	DF	0080-
25	4,700	40	.034	.022	.044	.440	.53	4.77	6.54	8.19	AA	0081-
"	8,200	"	.021	.014	.030	.300	.72	6.48	9.67	11.9	AB	0082-
"	12,000	"	.015	.010	.026	.250	.86	7.74	12.7	15.5	AC	0083-
"	14,000	"	.014	.0094	.026	.240	.92	8.28	13.9	17.1	AD	0084-
"	16,000	"	.012	.0085	.025	.230	.98	8.82	14.7	18.8	AE	0085-
"	18,000	"	.012	.0080	.025	.220	1.03	9.27	15.0	20.2	AF	0086-
"	17,000	"	.015	.013	.031	.138	.90	8.10	14.3	17.1	BB	0087-
"	26,000	"	.010	.0081	.026	.126	1.23	11.0	18.2	21.5	BC	0088-
"	30,000	"	.0090	.0074	.025	.120	1.34	12.0	19.6	22.9	BD	0089-
"	35,000	"	.0084	.0068	.025	.120	1.42	12.7	20.5	24.1	BE	0090-
"	39,000	"	.0079	.0064	.025	.120	1.52	13.6	21.5	25.1	BF	0091-
"	31,000	"	.014	.011	.029	.138	1.32	11.8	16.8	18.9	CB	0092-
"	47,000	"	.010	.0080	.026	.132	1.63	14.6	20.7	23.0	CC	0093-
"	55,000	"	.0084	.0070	.026	.132	1.76	15.8	22.1	24.3	CD	0094-
"	63,000	"	.0076	.0065	.026	.126	1.88	16.9	24.0	26.2	CE	0095-
"	71,000	"	.0070	.0060	.025	.126	2.00	18.0	25.7	27.8	CF	0096-
"	70,000	"	.011	.0090	.027	.156	1.98	17.8	25.5	25.9	DC	0097-
"	82,000	"	.0090	.0080	.026	.156	2.15	19.3	26.5	26.9	DD	0098-
"	94,000	"	.0079	.0072	.026	.156	2.30	20.7	27.5	27.7	DE	0099-
"	100,000	"	.0073	.0065	.026	.150	2.37	21.3	28.6	29.5	DF	0100-
30	4,100	45	.037	.023	.044	.440	.55	4.95	6.31	8.01	AA	0101-
"	7,200	"	.022	.014	.030	.300	.74	6.66	9.56	11.9	AB	0102-
"	11,000	"	.017	.011	.026	.260	.86	7.74	12.2	15.1	AC	0103-
"	12,000	"	.015	.0097	.026	.250	.94	8.46	13.4	16.8	AD	0104-
"	14,000	"	.013	.0089	.025	.230	1.01	9.09	14.3	18.3	AE	0105-
"	15,000	"	.012	.0083	.025	.230	1.07	9.63	14.6	19.8	AF	0106-
"	15,000	"	.015	.013	.031	.138	1.04	9.36	14.0	16.8	BB	0107-
"	23,000	"	.012	.0082	.026	.126	1.30	11.7	17.9	21.5	BC	0108-
"	27,000	"	.010	.0074	.025	.120	1.40	12.6	18.7	22.9	BD	0109-
"	30,000	"	.0094	.0070	.025	.120	1.49	13.4	20.3	24.1	BE	0110-
"	34,000	"	.0088	.0065	.025	.120	1.58	14.2	21.0	24.7	BF	0111-
"	28,000	"	.014	.011	.029	.138	1.38	12.4	16.6	18.8	CB	0112-
"	43,000	"	.010	.0080	.026	.138	1.70	15.3	20.4	23.0	CC	0113-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-21T18:05Z
Check the source to verify that this is the current version before use.

TABLE I. Style CUR92 Capacitors.

DC rated voltage @ 105°C	Capacitance (nom)	DC surge voltage @ 105°C	ESR @ 25°C		Impedance @ 100 kHz		DC leakage		Max. ac ripple 1/ current @ 85°C		Case size	Dash number 2/
			120 Hz	20 kHz	25°C	-55°C	25°C	105°C	120 Hz	20 kHz		
Volts	µF	Volts	Ohms		Ohms		mA		Amps			
30	50,000	45	.0087	.0070	.026	.132	1.84	16.5	21.8	24.2	CD	0114-
"	57,000	"	.0078	.0065	.026	.126	1.96	17.6	23.0	25.3	CE	0115-
"	64,000	"	.0072	.0060	.025	.126	2.08	18.7	25.1	27.6	CF	0116-
"	64,000	"	.011	.0090	.027	.156	2.08	18.7	23.3	24.3	DC	0117-
"	74,000	"	.0092	.0080	.026	.156	2.24	20.1	25.3	26.5	DD	0118-
"	85,000	"	.0082	.0072	.026	.156	2.40	21.6	27.5	27.7	DE	0119-
"	96,000	"	.0075	.0065	.026	.150	2.55	22.9	28.3	29.4	DF	0120-
40	3,000	55	.042	.023	.044	.440	.54	4.86	5.90	8.05	AA	0121-
"	5,100	"	.024	.014	.030	.300	.73	6.57	9.05	12.0	AB	0122-
"	7,400	"	.018	.010	.026	.250	.88	7.92	11.9	15.5	AC	0123-
"	8,700	"	.015	.0094	.025	.240	.94	8.46	12.4	17.1	AD	0124-
"	9,800	"	.016	.0088	.025	.230	1.00	9.00	13.1	18.5	AE	0125-
"	11,000	"	.013	.0080	.025	.230	1.04	9.36	13.3	20.2	AF	0126-
"	11,000	"	.017	.013	.031	.138	1.00	9.00	13.2	17.2	BB	0127-
"	16,000	"	.011	.0082	.026	.126	1.24	11.1	16.9	21.3	BC	0128-
"	19,000	"	.010	.0074	.025	.120	1.34	12.0	18.1	22.9	BD	0129-
"	22,000	"	.0098	.0068	.025	.120	1.44	12.9	19.2	23.8	BE	0130-
"	24,000	"	.009	.0065	.025	.120	1.53	13.7	20.0	24.7	BF	0131-
"	20,000	"	.015	.011	.029	.138	1.34	12.0	15.9	18.7	CB	0132-
"	30,000	"	.011	.0080	.026	.132	1.64	14.7	19.6	22.8	CC	0133-
"	35,000	"	.0094	.0070	.026	.132	1.78	16.0	21.0	24.3	CD	0134-
"	41,000	"	.0084	.0065	.026	.126	1.92	17.2	22.3	24.4	CE	0135-
"	46,000	"	.0077	.0060	.025	.126	2.04	18.3	23.1	26.2	CF	0136-
"	45,000	"	.011	.0090	.027	.156	2.01	18.0	22.2	24.1	DC	0137-
"	53,000	"	.0096	.0080	.026	.156	2.18	19.6	24.0	26.2	DD	0138-
"	61,000	"	.0086	.0072	.026	.156	2.34	21.0	25.5	27.7	DE	0139-
"	68,000	"	.0078	.0065	.026	.150	2.47	22.2	27.1	29.4	DF	0140-
50	2,200	75	.048	.023	.043	.430	.54	4.86	5.50	8.05	AA	0141-
"	3,900	"	.027	.014	.030	.300	.73	6.57	8.50	12.1	AB	0142-
"	5,700	"	.020	.010	.026	.250	.88	7.92	10.9	15.4	AC	0143-
"	6,600	"	.018	.0095	.026	.240	.94	8.46	11.5	17.0	AD	0144-
"	7,400	"	.016	.0087	.026	.230	1.01	9.09	12.3	18.6	AE	0145-
"	8,300	"	.015	.0083	.025	.220	1.06	9.54	12.5	19.8	AF	0146-
"	8,000	"	.018	.014	.032	.138	1.03	9.27	12.8	17.2	BB	0147-
"	12,000	"	.012	.0080	.026	.126	1.26	11.3	16.2	21.3	BC	0148-
"	14,000	"	.011	.0074	.025	.120	1.34	12.0	17.4	22.7	BD	0149-
"	16,000	"	.011	.0067	.025	.120	1.46	13.1	18.4	23.8	BE	0150-
"	19,000	"	.0099	.0064	.025	.120	1.54	13.8	19.2	24.7	BF	0151-
"	16,000	"	.016	.012	.030	.138	1.34	12.0	15.4	18.6	CB	0152-
"	24,000	"	.012	.0085	.027	.132	1.64	14.7	19.1	22.6	CC	0153-
"	28,000	"	.010	.0075	.026	.132	1.78	16.0	20.4	23.6	CD	0154-
"	32,000	"	.0090	.0070	.026	.126	1.90	17.1	21.6	25.2	CE	0155-
"	36,000	"	.0082	.0065	.026	.126	2.01	18.0	22.4	26.0	CF	0156-
"	36,000	"	.012	.010	.028	.156	2.01	18.0	20.7	22.8	DC	0157-
"	42,000	"	.010	.0090	.027	.156	2.17	19.5	22.5	24.5	DD	0158-
"	48,000	"	.0090	.0080	.026	.156	2.32	20.8	24.0	26.0	DE	0159-
"	55,000	"	.0081	.0070	.026	.150	2.49	22.4	26.4	28.0	DF	0160-
75	1,200	100	.107	.060	.088	1.86	.49	4.41	3.69	4.94	AA	0161-
"	2,000	"	.060	.034	.055	1.00	.66	5.94	5.73	7.61	AB	0162-
"	3,000	"	.042	.024	.042	.840	.79	7.11	7.75	10.1	AC	0163-
"	3,500	"	.037	.021	.038	.760	.85	7.65	8.67	11.3	AD	0164-
"	4,000	"	.033	.019	.035	.700	.91	8.19	9.59	12.5	AE	0165-
"	4,400	"	.030	.017	.032	.640	.96	8.64	10.5	13.7	AF	0166-
"	4,300	"	.033	.020	.038	.720	.94	8.46	9.44	12.1	BB	0167-
"	6,600	"	.023	.014	.033	.528	1.16	10.4	12.6	16.1	BC	0168-
"	7,700	"	.020	.012	.025	.400	1.25	11.2	14.1	17.9	BD	0169-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.

TABLE I. Style CUR92 Capacitors.

DC rated voltage @ 105°C	Capacitance (nom)	DC surge voltage @ 105°C	ESR @ 25°C 120 Hz	ESR @ 25°C 20 kHz	Impedance @ 100 kHz 25°C	Impedance @ 100 kHz -55°C	DC leakage 25°C	DC leakage 105°C	Max. ac ripple current @ 85°C 1/ 120 Hz	Max. ac ripple current @ 85°C 1/ 20 kHz	Case size	Dash number 2/
Volts	µF	Volts	Ohms		Ohms		mA		Amps			
75	8,800	100	.018	.011	.025	.400	1.30	11.7	15.3	19.3	BE	0170-
"	9,900	"	.017	.010	.025	.384	1.36	12.2	16.6	21.0	BF	0171-
"	9.100	"	.020	.013	.031	.400	1.24	11.1	13.9	17.7	CB	0172-
"	13,000	"	.014	.0097	.027	.384	1.48	13.3	17.0	21.9	CC	0173-
"	15,000	"	.013	.0088	.026	.368	1.59	14.1	18.6	23.1	CD	0174-
"	18,000	"	.011	.0078	.026	.368	1.74	15.6	19.8	24.4	CE	0175-
"	20,000	"	.010	.0072	.026	.352	1.84	16.5	20.6	25.4	CF	0176-
"	20,000	"	.014	.011	.029	.432	1.84	16.5	19.4	21.6	DC	0177-
"	23,000	"	.012	.010	.028	.416	1.97	17.7	20.7	23.4	DD	0178-
"	27,000	"	.011	.0090	.027	.416	2.14	19.2	22.1	24.5	DE	0179-
"	30,000	"	.0095	.0080	.026	.416	2.25	20.2	23.7	25.6	DF	0180-
100	750	150	.140	.059	.082	1.82	.42	3.78	3.23	4.97	AA	0181-
"	1,300	"	.082	.035	.057	1.14	.54	4.86	4.90	7.48	AB	0182-
"	2,000	"	.056	.025	.042	.840	.67	6.03	6.68	10.0	AC	0183-
"	2,200	"	.049	.022	.038	.760	.72	6.48	7.48	11.2	AD	0184-
"	2,600	"	.044	.020	.035	.700	.76	6.84	8.27	12.3	AE	0185-
"	2,900	"	.039	.018	.033	.660	.81	7.29	9.19	13.6	AF	0186-
"	2,800	"	.043	.018	.033	.528	.79	7.11	8.31	12.1	BB	0187-
"	4,100	"	.029	.014	.027	.432	.97	8.73	11.1	16.1	BC	0188-
"	4,900	"	.025	.011	.026	.400	1.04	9.36	12.4	17.7	BD	0189-
"	5,600	"	.023	.011	.025	.384	1.12	10.0	13.8	19.7	BE	0190-
"	6,200	"	.020	.010	.023	.368	1.19	10.7	15.1	21.3	BF	0191-
"	4,800	"	.026	.014	.032	.432	1.04	9.36	12.2	17.6	CB	0192-
"	7,200	"	.018	.010	.028	.384	1.27	11.4	15.5	21.0	CC	0193-
"	8,400	"	.016	.090	.027	.368	1.37	12.3	17.6	22.1	CD	0194-
"	9,600	"	.014	.0080	.026	.368	1.47	13.2	18.2	23.3	CE	0195-
"	10,000	"	.013	.0075	.026	.368	1.50	13.5	18.7	23.9	CF	0196-
"	10,000	"	.016	.012	.030	.432	1.50	13.5	17.8	20.5	DC	0197-
"	12,000	"	.014	.011	.029	.416	1.64	14.7	19.6	21.9	DD	0198-
"	14,000	"	.013	.010	.028	.416	1.78	16.0	20.8	23.2	DE	0199-
"	16,000	"	.011	.0090	.027	.416	1.90	17.1	22.2	24.6	DF	0200-
150	290	200	.377	.114	.138	3.86	.30	2.70	1.96	3.60	AA	0201-
"	520	"	.209	.064	.085	2.28	.40	3.60	3.07	5.57	AB	0202-
"	750	"	.146	.046	.062	1.59	.48	4.32	4.14	7.40	AC	0203-
"	870	"	.126	.040	.055	1.34	.52	4.68	4.67	8.30	AD	0204-
"	990	"	.111	.036	.049	1.15	.55	4.95	5.20	9.20	AE	0205-
"	1,100	"	.101	.033	.046	1.02	.58	5.22	5.70	10.0	AF	0206-
"	1,000	"	.104	.033	.046	.966	.57	5.13	5.46	9.78	BB	0207-
"	1,500	"	.072	.023	.035	.693	.69	6.21	7.33	12.9	BC	0208-
"	1,800	"	.063	.021	.032	.595	.74	6.66	8.19	14.4	BD	0209-
"	2,100	"	.054	.018	.030	.528	.80	7.20	9.26	16.1	BE	0210-
"	2,300	"	.049	.017	.028	.459	.84	7.56	10.0	17.4	BF	0211-
"	1,800	"	.063	.021	.034	.516	.74	6.66	8.06	14.2	CB	0212-
"	2,700	"	.043	.014	.028	.392	.90	8.10	10.8	18.8	CC	0213-
"	3,000	"	.037	.013	.026	.338	.97	8.73	12.2	20.9	CD	0214-
"	3,500	"	.032	.011	.025	.295	1.06	9.54	13.7	23.2	CE	0215-
"	3,900	"	.029	.010	.024	.254	1.12	10.0	15.0	25.2	CF	0216-
"	3,900	"	.031	.011	.029	.272	1.10	9.90	14.3	23.6	DC	0217-
"	4,600	"	.026	.010	.028	.232	1.21	10.8	16.2	26.3	DD	0218-
"	5,300	"	.023	.0091	.027	.191	1.29	11.6	17.9	28.8	DE	0219-
"	5,900	"	.021	.0083	.027	.162	1.36	12.2	19.5	31.1	DF	0220-

1/ The ripple current values shown are representative values based on capability of 2,000 hours life test at rated temperature but each individual value is not supported by test data. See table III for temperature correction factors.

2/ Complete dash number will include an additional letter symbol to indicate FR level (i.e, 0001M, 0026R, etc.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case:
Type - Tubular.
Material - Metal.
Terminals - See figure 1.

DC rated voltage: See table I.

Reverse voltage: 1.5 volts maximum.

Capacitance (Cap.) value: See table I.

Cap. tolerance: -10, +75 percent.

FR level: M, P, R, and S.

Operating temperature range: -55°C to +105°C

Burn-in: In accordance with MIL-C-39018.

DC leakage (DCL), See table I.

Equivalent series resistance (ESR): See table I.

Low temperature exposure:
DCL - See table I.
Cap. - See table I.
ESR - See table I.

Terminal strength: Method 211 of MIL-STD-202, test condition E.
Torque - 8 pound-inches for terminal Style A; 15 pound-inches for terminal style B.

Stability at reduced and high temperatures:

Step 1 (at +25°C):
DCL - See table I.
Cap. - See table I.
ESR - See table I.
Step 2 (at -55°C):
Impedance - See table I.
Cap. - Within the following percentages of the step 1 value:
5 V dc: ±35 percent.
10 to 25 V dc inclusive: ±25 percent.
30 to 100 V dc inclusive: ±20 percent.
150 V dc: ±30 percent.
Step 3 (at +25°C):
DCL - See table I.
Cap. - Within ±5 percent of step 1 value.
ESR - See table I.
Step 4 (at +105°C).:
DCL - See table I.
Cap. - Within ±30 percent of step 1 value.
ESR - See table I.
Step 5 (at +25°C):
DCL - See table I.
Cap. - Within ±5 percent of step 1 value.
ESR - See table I.

Life: Method 108 of MIL-STD-202
For qualification: Condition F (2,000 hours) at 85°C.
DCL - See table I.
Cap. - Within ±10 percent of initial measured value.
ESR - Not more than 130 percent of initial requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.

10,000 hour (extended life and group C) at 85°C.
DCL - See table I.
Cap. - Within ±15 percent of initial measurement.
ESR - Not more than 250 percent of initial requirement.

Case insulation: In accordance with MIL-C-39018.

Shock (specified pulse): Method 213 of MIL-STD-202, condition H.

Vibration: Low frequency - Method 201, of MIL-STD-202.

Thermal shock and immersion:
Thermal shock: Method 107 of MIL-STD-202, condition A.
Immersion: Method 104 of MIL-STD-202, condition B (2 cycles, 30 minutes).
DCL - See table I.
Cap.- Within ±5 percent of initial measured value.
ESR - See table I.
Case insulation - Shall meet initial requirements.

Surge voltage:
DCL - See table I.
Cap. - Within ±6 percent of initial measured value.
ESR - See table I.

Vent: In accordance with MIL-C-39018.

Moisture resistance: Method 106 of MIL-STD-202.
DCL - See table I.
Cap. - Within ±6 percent of initial measured value.
ESR - See table I.
Case insulation - Shall meet initial requirements.

High temperature exposure (500 hours at 105°C):
DCL - Not more than 200 percent of initial requirement.
Cap. - Within ±10 percent of initial measured value.
ESR - Not more than 115 percent of initial requirement.

AC verification:
DCL - See table I.
Cap. - Within ±15 percent of initial measured value.
ESR - 200 percent of initial requirement.

Reverse voltage aging: In accordance with MIL-C-39018.

Marking: In accordance with MIL-C-39018.

Part number: M39018/10 - (dash number from table I).

APPLICATION NOTES:

1. Ripple current. Capacitors shall withstand the rms ripple currents at 20 kHz as given in table I.

The maximum ripple current shall apply with the following qualifications:

The sum of the dc voltage plus the peak value of ac voltage must not exceed the working voltage rating of the unit, or the ac shall never exceed the maximum dc.

The values of dc voltage and ac peak voltage must be such that not more than a 1.5 volt voltage reversal is experienced.

Under no conditions of temperature or frequency, regardless of the multipliers given below, should the rms ripple current be in excess of 30 amperes on terminal "A" capacitors, or in excess of 50 amperes on terminal "B" capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.

TABLE II. Factors for determining ripple currents at various temperatures.

Temperature (in degrees Celsius)			
≤45°	65°	85°	105°
1.7	1.4	1.0	0.3

2. Insulation and grounding. These capacitors have an inherently low indeterminate insulation resistance between the cathode terminal and the container. The container should be considered at the same potential as the cathode terminal with respect to ground. Where a potential difference exists between the cathode terminal and the chassis or other metallic mounting surfaces which are usually ground, the capacitors should be mounted in such a manner as to insulate the container from such mounting surfaces.

3. Shelf life. General shelf life expectance for these capacitors is in excess of 3 years provided storage temperatures do not exceed 40°C. Storage at higher temperatures may decrease shelf life.

   It is recommended that capacitors stored more than 3 years be checked at room temperature for leakage current in accordance with the applicable requirement before use.

4. Torque. The minimum and maximum torque applied to the steel screw/aluminum insert shall be as follows:

	Min	Max
With a minimum of 3 engaged threads - - - -	12 inch/lbs	18 inch/lbs
With a minimum of 6 engaged threads - - - -	20 inch/lbs	25 inch/lbs

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review actitivies:
Navy - SH
Air Force - 17, 99
DLA - ES

User activities:
Navy - CG, MC, AS, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5910-1384)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 8 MAR 1

PREVIOUS EDITION IS OBSOLETE.

TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:05Z
Check the source to verify that this is the current version before use.