INCH-POUND


MIL-PRF-39018/12
11 October 1996

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, ELECTROLYTIC (ALUMINUM OXIDE)(POLARIZED),
NON-ESTABLISHED RELIABILITY AND ESTABLISHED RELIABILITY,
STYLE CU72 (INSULATED) AND CUR72 (INSULATED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39018.

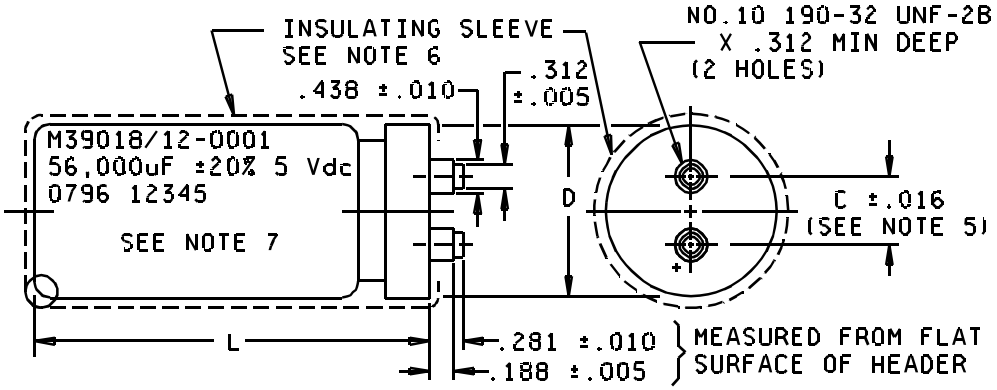

Inches	mm	Inches	mm
.005	0.13	.281	7.14
.010	0.25	.312	7.92
.016	0.41	.438	11.13
.188	4.78		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses and are given for general information only.
3. Capacitors are mounted by means of a wraparound, footed-type bracket.
4. There is an indeterminate resistance between the metal case and the negative terminal.
5. "C" dimension is .500 (12.70) for case diameters of 1.375 (34.92); .875 (22.22) for case diameters of 2.000 (50.80); 1.125 (28.58) for case diameters of 2.500 (63.50); and 1.250 (31.75) for case diameters of 3.000 (76.20).
6. Insulating sleeve thickness shall not exceed .016 and shall overlap the ends of the capacitor body.
7. Example of marking and its relative location on the capacitor body.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

Case size	Dimensions		Case size	Dimensions	
	L ± 0.062 (1.57)	D ± 0.031 (0.79)		L ± 0.062 (1.57)	D ± 0.031 (0.79)
A0	2.125 (53.98)	1.375 (34.92)	D1	4.625 (117.48)	2.000 (50.80)
M0	2.625 (66.68)	1.375 (34.92)	E1	5.125 (130.18)	2.000 (50.80)
B0	3.125 (79.38)	1.375 (34.92)	F1	5.625 (142.88)	2.000 (50.80)
L0	3.625 (92.08)	1.375 (34.92)	B2	3.125 (79.38)	2.500 (63.50)
C0	4.125 (104.78)	1.375 (34.92)	C2	4.125 (104.78)	2.500 (63.50)
D0	4.625 (117.48)	1.375 (34.92)	D2	4.625 (117.48)	2.500 (63.50)
E0	5.125 (130.18)	1.375 (34.92)	E2	5.125 (130.18)	2.500 (63.50)
F0	5.625 (142.88)	1.375 (34.92)	F2	5.625 (142.88)	2.500 (63.50)
A1	2.125 (53.98)	2.000 (50.80)	C3	4.125 (104.78)	3.000 (76.20)
M1	2.625 (66.68)	2.000 (50.80)	D3	4.625 (117.48)	3.000 (76.20)
B1	3.125 (79.38)	2.000 (50.80)	E3	5.125 (130.18)	3.000 (76.20)
L1	3.625 (92.08)	2.000 (50.80)	F3	5.625 (142.88)	3.000 (76.20)
C1	4.125 (104.78)	2.000 (50.80)			

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Tubular, metal.

Terminals: See figure 1.

DC rated voltage: See table I.

Reverse voltage: 1.5 volts maximum.

Capacitance (Cap.): See table I.

Capacitance tolerance: ±20 percent.

Failure rate level (CUR72 only): M, P, R, and S.

Operating temperature range: -40°C to +105°C.

DC leakage (DCL): See table I.

Equivalent series resistance (ESR): See table I.

Low temperature exposure:
DCL - See table I.
Cap. - See table I.
ESR - See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and CU72 capacitors.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
5 volts dc rated voltage at +85°C				7 volts dc surge voltage at +85°C					
56,000	0.0288	0.0144	1.44	0.79	4.76	7.08	A0	0001	2001-
68,000	0.0251	0.0125	1.25	0.87	5.25	8.84	M0	0002	2002-
82,000	0.0207	0.0103	1.03	0.96	5.76	9.08	M0	0003	2003-
100,000	0.0173	0.0086	0.86	1.06	6.36	10.66	B0	0004	2004-
120,000	0.0149	0.0074	0.74	1.16	6.97	12.24	L0	0005	2005-
120,000	0.0164	0.0082	0.82	1.16	6.97	11.96	A1	0006	2006-
150,000	0.0125	0.0063	0.63	1.30	7.79	14.06	C0	0007	2007-
180,000	0.0110	0.0055	0.55	1.42	8.54	15.78	D0	0008	2008-
180,000	0.0114	0.0057	0.57	1.42	8.54	15.39	M1	0009	2009-
220,000	0.0096	0.0048	0.48	1.57	9.44	17.64	E0	0010	2010-
220,000	0.0095	0.0047	0.47	1.57	9.44	18.11	B1	0011	2011-
270,000	0.0079	0.0040	0.40	1.74	10.46	20.83	L1	0012	2012-
330,000	0.0069	0.0035	0.35	1.93	11.56	23.57	C1	0013	2013-
390,000	0.0062	0.0031	0.31	2.09	12.57	26.13	D1	0014	2014-
390,000	0.0073	0.0037	0.37	2.09	12.57	23.83	B2	0015	2015-
470,000	0.0054	0.0027	0.27	2.30	13.80	30.42	F1	0016	2016-
470,000	0.0066	0.0033	0.33	2.30	13.80	28.49	C2	0017	2017-
560,000	0.0054	0.0027	0.27	2.51	15.06	30.60	C2	0018	2018-
680,000	0.0049	0.0025	0.25	2.77	16.60	33.64	D2	0019	2019-
820,000	0.0042	0.0021	0.21	3.04	18.22	39.24	F2	0020	2020-
820,000	0.0059	0.0030	0.30	3.04	18.22	32.96	C3	0021	2021-
1,000,000	0.0053	0.0027	0.27	3.35	20.12	35.99	D3	0022	2022-
1,200,000	0.0050	0.0025	0.25	3.67	22.05	38.78	E3	0023	2023-
10 volts dc rated voltage at +85°C				15 volts dc surge voltage at +85°C					
47,000	0.0271	0.0135	1.35	1.03	6.17	7.31	A0	0024	2024-
56,000	0.0226	0.0113	1.13	1.12	6.73	8.69	B0	0025	2025-
68,000	0.0189	0.0095	0.95	1.24	7.42	10.17	B0	0026	2026-
82,000	0.0166	0.0083	0.83	1.36	8.15	12.37	B0	0027	2027-
82,000	0.0175	0.0087	0.88	1.36	8.15	11.57	A1	0028	2028-
100,000	0.0141	0.0070	0.70	1.50	9.00	12.55	L0	0029	2029-
100,000	0.0136	0.0068	0.68	1.50	9.00	14.07	M1	0030	2030-
120,000	0.0120	0.0060	0.60	1.64	9.86	15.09	D0	0031	2031-
120,000	0.0123	0.0062	0.62	1.64	9.86	14.83	M1	0032	2032-
150,000	0.0103	0.0052	0.52	1.84	11.02	17.03	E0	0033	2033-
150,000	0.0108	0.0054	0.54	1.84	11.02	18.30	B1	0034	2034-
180,000	0.0091	0.0046	0.46	2.01	12.07	18.83	F0	0035	2035-
180,000	0.0091	0.0046	0.46	2.01	12.07	18.34	B1	0036	2036-
220,000	0.0078	0.0039	0.39	2.22	13.35	21.07	L1	0037	2037-
270,000	0.0081	0.0041	0.41	2.46	14.79	22.49	C1	0038	2038-
330,000	0.0069	0.0035	0.35	2.72	16.35	28.27	E1	0039	2039-
390,000	0.0052	0.0026	0.26	2.96	17.77	30.83	F1	0040	2040-
390,000	0.0055	0.0028	0.28	2.96	17.77	32.39	C2	0041	2041-
470,000	0.0050	0.0025	0.25	3.25	19.51	33.42	D2	0042	2042-
560,000	0.0045	0.0023	0.23	3.55	21.30	36.40	E2	0043	2043-
560,000	0.0057	0.0029	0.29	3.55	21.30	33.41	C3	0044	2044-
680,000	0.0052	0.0026	0.26	3.91	23.47	36.53	D3	0045	2045-
820,000	0.0048	0.0024	0.24	4.30	25.77	39.37	E3	0046	2046-
1,000,000	0.0046	0.0023	0.23	4.74	28.46	41.83	F3	0047	2047-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and CU72 capacitors - Continued.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
15 volts dc rated voltage at +85°C				20 volts dc surge voltage at +85°C					
33,000	0.0260	0.0130	1.30	1.06	6.33	7.45	A0	0048	2048-
39,000	0.0217	0.0109	1.09	1.15	6.88	8.84	M0	0049	2049-
47,000	0.0190	0.0095	0.95	1.26	7.56	9.46	M0	0050	2050-
56,000	0.0162	0.0081	0.81	1.37	8.25	11.01	B0	0051	2051-
56,000	0.0170	0.0085	0.85	1.37	8.25	11.71	A1	0052	2052-
68,000	0.0137	0.0068	0.69	1.51	9.09	12.69	L0	0053	2053-
68,000	0.0144	0.0072	0.72	1.51	9.09	13.37	M1	0054	2054-
82,000	0.0118	0.0059	0.59	1.66	9.98	14.42	C0	0055	2055-
82,000	0.0119	0.0060	0.60	1.66	9.98	15.02	M1	0056	2056-
100,000	0.0103	0.0052	0.52	1.84	11.02	16.26	E0	0057	2057-
100,000	0.0103	0.0052	0.52	1.84	11.02	17.37	B1	0058	2058-
120,000	0.0090	0.0045	0.45	2.01	12.07	18.99	F0	0059	2059-
120,000	0.0090	0.0045	0.45	2.01	12.07	18.50	B1	0060	2060-
150,000	0.0075	0.0038	0.38	2.25	13.50	21.39	L1	0061	2061-
180,000	0.0066	0.0033	0.33	2.46	14.79	24.10	C1	0062	2062-
180,000	0.0076	0.0038	0.38	2.46	14.79	23.31	B2	0063	2063-
220,000	0.0058	0.0029	0.29	2.72	16.35	26.92	D1	0064	2064-
270,000	0.0049	0.0025	0.25	3.02	18.11	31.46	F1	0065	2065-
270,000	0.0056	0.0028	0.28	3.02	18.11	29.98	C2	0066	2066-
330,000	0.0050	0.0025	0.25	3.34	20.02	33.12	D2	0067	2067-
390,000	0.0046	0.0023	0.23	3.63	21.77	36.08	E2	0068	2068-
390,000	0.0058	0.0029	0.29	3.63	21.77	33.08	C3	0069	2069-
470,000	0.0043	0.0022	0.22	3.98	23.90	38.82	F2	0070	2070-
470,000	0.0053	0.0027	0.27	3.98	23.90	36.22	D3	0071	2071-
560,000	0.0049	0.0025	0.25	4.35	26.08	39.12	E3	0072	2072-
680,000	0.0047	0.0024	0.24	4.79	28.74	41.62	F3	0073	2073-
25 volts dc rated voltage at +85°C				40 volts dc surge voltage at +85°C					
22,000	0.0259	0.0130	1.30	1.11	6.67	7.50	A0	0074	2074-
27,000	0.0210	0.0105	1.06	1.23	7.39	9.03	M0	0075	2075-
33,000	0.0183	0.0092	0.92	1.36	8.17	10.14	B0	0076	2076-
39,000	0.0156	0.0078	0.78	1.48	8.89	11.26	B0	0077	2077-
39,000	0.0164	0.0082	0.82	1.48	8.89	11.97	A1	0078	2078-
47,000	0.0133	0.0067	0.67	1.63	9.76	12.94	L0	0079	2079-
47,000	0.0141	0.0071	0.71	1.63	9.76	13.62	M1	0080	2080-
56,000	0.0116	0.0058	0.58	1.77	10.65	14.64	C0	0081	2081-
56,000	0.0117	0.0059	0.59	1.77	10.65	15.27	M1	0082	2082-
68,000	0.0101	0.0051	0.51	1.96	11.73	16.50	D0	0083	2083-
68,000	0.0103	0.0052	0.52	1.96	11.73	17.04	B1	0084	2084-
82,000	0.0088	0.0044	0.44	2.15	12.89	19.31	F0	0085	2085-
82,000	0.0088	0.0044	0.44	2.15	12.89	18.82	B1	0086	2086-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and CU72 capacitors - Continued.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
25 volts dc rated voltage at +85°C				40 volts dc surge voltage at +85°C					
100,000	0.0074	0.0037	0.37	2.37	14.23	21.63	L1	0087	2087-
120,000	0.0065	0.0033	0.33	2.60	15.59	24.39	C1	0088	2088-
120,000	0.0077	0.0039	0.39	2.60	15.59	23.20	B2	0089	2089-
150,000	0.0055	0.0028	0.28	2.90	17.43	29.09	E1	0090	2090-
150,000	0.0067	0.0034	0.34	2.90	17.43	26.52	C2	0091	2091-
180,000	0.0049	0.0025	0.25	3.18	19.09	31.87	F1	0092	2092-
180,000	0.0057	0.0029	0.29	3.18	19.09	29.85	C2	0093	2093-
220,000	0.0051	0.0026	0.26	3.52	21.11	33.01	D2	0094	2094-
270,000	0.0046	0.0023	0.23	3.90	23.38	36.05	E2	0095	2095-
270,000	0.0058	0.0029	0.29	3.90	23.38	33.03	C3	0096	2096-
330,000	0.0053	0.0027	0.27	4.31	25.85	36.10	D3	0097	2097-
390,000	0.0049	0.0025	0.25	4.68	28.10	39.03	E3	0098	2098-
470,000	0.0047	0.0024	0.24	5.14	30.85	41.57	F3	0099	2099-
35 volts dc rated voltage at +85°C				50 volts dc surge voltage at +85°C					
15,000	0.0287	0.0144	1.45	1.09	6.52	7.12	A0	0100	2100-
18,000	0.0246	0.0123	1.24	1.19	7.14	8.14	M0	0101	2101-
22,000	0.0204	0.0102	1.03	1.32	7.90	9.16	M0	0102	2102-
27,000	0.0170	0.0085	0.86	1.46	8.75	10.79	B0	0103	2103-
27,000	0.0177	0.0089	0.89	1.46	8.75	11.52	A1	0104	2104-
33,000	0.0143	0.0072	0.72	1.61	9.67	12.48	L0	0105	2105-
33,000	0.0140	0.0070	0.70	1.61	9.67	13.98	M1	0106	2106-
39,000	0.0125	0.0063	0.63	1.75	10.51	14.10	C0	0107	2107-
39,000	0.0126	0.0063	0.63	1.75	10.51	14.73	M1	0108	2108-
47,000	0.0109	0.0055	0.55	1.92	11.54	15.88	D0	0109	2109-
47,000	0.0113	0.0057	0.57	1.92	11.54	15.52	M1	0110	2110-
56,000	0.0096	0.0048	0.48	2.10	12.60	19.60	E0	0111	2111-
56,000	0.0094	0.0047	0.47	2.10	12.60	18.14	B1	0112	2112-
68,000	0.0080	0.0040	0.40	2.31	13.88	20.85	L1	0113	2113-
82,000	0.0070	0.0035	0.35	2.54	15.25	23.57	C1	0114	2114-
100,000	0.0061	0.0031	0.31	2.81	16.84	26.41	D1	0115	2115-
100,000	0.0077	0.0039	0.39	2.81	16.84	23.21	B2	0116	2116-
120,000	0.0054	0.0027	0.27	3.07	18.44	29.17	E1	0117	2117-
120,000	0.0067	0.0034	0.34	3.07	18.44	26.53	C2	0118	2118-
150,000	0.0057	0.0029	0.29	3.44	20.62	29.86	C2	0119	2119-
180,000	0.0051	0.0026	0.26	3.76	22.59	32.95	D2	0120	2120-
220,000	0.0044	0.0022	0.22	4.16	24.97	38.42	F2	0121	2121-
220,000	0.0060	0.0030	0.30	4.16	24.97	32.47	C3	0122	2122-
270,000	0.0055	0.0028	0.28	4.61	27.67	35.46	D3	0123	2123-
270,000	0.0064	0.0032	0.32	4.61	27.67	33.67	E3	0124	2124-
330,000	0.0046	0.0023	0.23	5.10	30.59	41.81	F3	0125	2125-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and CU72 capacitors - Continued.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
50 volts dc rated voltage at +85°C				75 volts dc surge voltage at +85°C					
10,000	0.0294	0.0147	1.49	1.06	6.36	7.04	A0	0126	2126-
12,000	0.0243	0.0122	1.23	1.16	6.97	8.40	M0	0127	2127-
15,000	0.0188	0.0094	0.96	1.30	7.79	10.37	B0	0128	2128-
18,000	0.0174	0.0087	0.88	1.42	8.54	10.66	B0	0129	2129-
18,000	0.0182	0.0091	0.92	1.42	8.54	11.36	A1	0130	2130-
22,000	0.0147	0.0074	0.74	1.57	9.44	12.34	L0	0131	2131-
22,000	0.0154	0.0077	0.78	1.57	9.44	13.03	M1	0132	2132-
27,000	0.0123	0.0062	0.62	1.74	10.46	14.97	D0	0133	2133-
27,000	0.0126	0.0063	0.64	1.74	10.46	14.70	M1	0134	2134-
33,000	0.0106	0.0053	0.54	1.93	11.56	16.85	E0	0135	2135-
33,000	0.0104	0.0052	0.53	1.93	11.56	17.30	B1	0136	2136-
47,000	0.0081	0.0041	0.41	2.30	13.80	20.79	L1	0137	2137-
56,000	0.0070	0.0035	0.35	2.51	15.06	23.44	C1	0138	2138-
56,000	0.0082	0.0041	0.41	2.51	15.06	22.41	B2	0139	2139-
68,000	0.0060	0.0030	0.30	2.77	16.60	27.81	E1	0140	2140-
68,000	0.0076	0.0038	0.38	2.77	16.60	26.13	C2	0141	2141-
82,000	0.0053	0.0027	0.27	3.04	18.22	30.61	F1	0142	2142-
82,000	0.0061	0.0031	0.31	3.04	18.22	28.85	C2	0143	2143-
100,000	0.0054	0.0027	0.27	3.35	20.12	32.00	D2	0144	2144-
120,000	0.0049	0.0025	0.25	3.67	22.05	35.00	E2	0145	2145-
120,000	0.0059	0.0030	0.30	3.67	22.05	32.70	C3	0146	2146-
150,000	0.0054	0.0027	0.27	4.11	24.65	35.71	D3	0147	2147-
180,000	0.0050	0.0025	0.25	4.50	27.00	38.59	E3	0148	2148-
75 volts dc rated voltage at +85°C				100 volts dc surge voltage at +85°C					
2700	0.0571	0.0286	3.02	0.68	4.05	5.05	A0	0149	2149-
3900	0.0487	0.0244	2.53	0.81	4.87	5.79	M0	0150	2150-
3900	0.0402	0.0201	2.12	0.81	4.87	6.53	M0	0151	2151-
5600	0.0289	0.0145	1.52	0.97	5.83	8.27	B0	0152	2152-
5600	0.0297	0.0149	1.56	0.97	5.83	8.91	A1	0153	2153-
6800	0.0242	0.0121	1.27	1.07	6.43	9.61	L0	0154	2154-
6800	0.0251	0.0126	1.31	1.07	6.43	10.21	M1	0155	2155-
8200	0.0205	0.0103	1.07	1.18	7.06	11.02	C0	0156	2156-
8200	0.0206	0.0103	1.08	1.18	7.06	11.52	M1	0157	2157-
10,000	0.0172	0.0086	0.90	1.30	7.79	13.23	E0	0158	2158-
10,000	0.0176	0.0088	0.92	1.30	7.79	13.02	B1	0159	2159-
12,000	0.0148	0.0074	0.77	1.42	8.54	14.84	F0	0160	2160-
12,000	0.0147	0.0074	0.77	1.42	8.54	14.52	B1	0161	2161-
15,000	0.0121	0.0061	0.63	1.59	9.55	16.96	L1	0162	2162-
18,000	0.0104	0.0052	0.54	1.74	10.46	19.29	C1	0163	2163-
18,000	0.0114	0.0057	0.59	1.74	10.46	19.02	B2	0164	2164-
22,000	0.0087	0.0044	0.45	1.93	11.56	23.03	E1	0165	2165-
27,000	0.0075	0.0038	0.39	2.13	12.81	25.80	F1	0166	2166-
27,000	0.0082	0.0041	0.42	2.13	12.81	24.91	C2	0167	2167-
33,000	0.0071	0.0036	0.36	2.36	14.16	27.95	C2	0168	2168-
39,000	0.0063	0.0032	0.32	2.57	15.39	30.81	E2	0169	2169-
39,000	0.0071	0.0036	0.36	2.57	15.39	30.01	C3	0170	2170-
47,000	0.0063	0.0032	0.32	2.82	16.90	33.28	D3	0171	2171-
56,000	0.0056	0.0028	0.28	3.07	18.44	34.45	E3	0172	2172-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and CU72 capacitors - Continued.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
100 volts dc rated voltage at +85°C				125 volts dc surge voltage at +85°C					
2200	0.0591	0.0414	3.19	0.70	4.22	4.96	A0	0173	2173-
2700	0.0480	0.0336	2.59	0.78	4.68	5.97	M0	0174	2174-
3300	0.0411	0.0288	2.21	0.86	5.17	6.78	B0	0175	2175-
3900	0.0341	0.0239	1.84	0.94	5.62	7.60	B0	0176	2176-
3900	0.0350	0.0245	1.88	0.94	5.62	8.20	A1	0177	2177-
4700	0.0287	0.0201	1.54	1.03	6.17	8.82	L0	0178	2178-
5600	0.0247	0.0173	1.32	1.12	6.73	10.17	D0	0179	2179-
5600	0.0245	0.0172	1.31	1.12	6.73	10.55	M1	0180	2180-
6800	0.0207	0.0145	1.11	1.24	7.42	11.53	D0	0181	2181-
6800	0.0210	0.0147	1.12	1.24	7.42	11.95	B1	0182	2182-
8200	0.0175	0.0123	0.93	1.36	8.15	13.65	F0	0183	2183-
8200	0.0174	0.0122	0.93	1.36	8.15	13.35	B1	0184	2184-
12,000	0.0124	0.0087	0.66	1.64	9.86	17.66	C1	0185	2185-
12,000	0.0133	0.0093	0.70	1.64	9.86	17.59	B2	0186	2186-
15,000	0.0103	0.0072	0.54	1.84	11.02	20.25	D1	0187	2187-
15,000	0.0114	0.0080	0.60	1.84	11.02	20.38	C2	0188	2188-
18,000	0.0088	0.0062	0.46	2.01	12.07	23.78	F1	0189	2189-
18,000	0.0094	0.0066	0.49	2.01	12.07	23.17	C2	0190	2190-
22,000	0.0081	0.0057	0.42	2.22	13.35	26.11	D2	0191	2191-
27,000	0.0071	0.0050	0.37	2.46	14.79	29.17	E2	0192	2192-
27,000	0.0078	0.0055	0.40	2.46	14.79	28.63	C3	0193	2193-
33,000	0.0068	0.0048	0.35	2.72	16.35	31.93	D3	0194	2194-
39,000	0.0061	0.0043	0.31	2.96	17.77	35.04	E3	0195	2195-
47,000	0.0055	0.0039	0.28	3.25	19.51	38.21	F3	0196	2196-
150 volts dc rated voltage at +85°C				200 volts dc surge voltage at +85°C					
1200	0.0941	0.0659	5.20	0.64	3.82	3.93	A0	0197	2197-
1500	0.0778	0.0545	4.27	0.71	4.27	4.69	M0	0198	2198-
1800	0.0638	0.0447	3.51	0.78	4.68	5.18	M0	0199	2199-
2200	0.0537	0.0376	2.94	0.86	5.17	5.96	B0	0200	2200-
2700	0.0435	0.0305	2.39	0.95	5.73	6.74	B0	0201	2201-
2700	0.0446	0.0312	2.44	0.95	5.73	7.27	A1	0202	2202-
3300	0.0360	0.0252	1.97	1.06	6.33	7.88	L0	0203	2203-
3300	0.0378	0.0265	2.05	1.06	6.33	8.33	M1	0204	2204-
3900	0.0308	0.0216	1.68	1.15	6.88	8.99	C0	0205	2205-
3900	0.0310	0.0217	1.69	1.15	6.88	9.39	M1	0206	2206-
4700	0.0259	0.0181	1.41	1.26	7.56	10.78	E0	0207	2207-
4700	0.0266	0.0186	1.44	1.26	7.56	10.61	B1	0208	2208-
5600	0.0222	0.0155	1.21	1.37	8.25	12.13	F0	0209	2209-
5600	0.0222	0.0155	1.21	1.37	8.25	11.84	B1	0210	2210-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and CU72 capacitors - Continued.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
150 volts dc rated voltage at +85°C				200 volts dc surge voltage at +85°C					
6800	0.0185	0.0130	1.00	1.51	9.09	13.74	L1	0211	2211-
8200	0.0156	0.0109	0.84	1.66	9.98	15.73	C1	0212	2212-
8200	0.0169	0.0118	0.90	1.66	9.98	15.60	B2	0213	2213-
10,000	0.0130	0.0091	0.70	1.84	11.02	18.85	E1	0214	2214-
10,000	0.0142	0.0099	0.76	1.84	11.02	18.23	C2	0215	2215-
12,000	0.0112	0.0078	0.60	2.01	12.07	21.14	F1	0216	2216-
12,000	0.0118	0.0083	0.63	2.01	12.07	20.71	C2	0217	2217-
15,000	0.0099	0.0069	0.53	2.25	13.50	23.63	D2	0218	2218-
18,000	0.0086	0.0060	0.45	2.46	14.79	26.37	E2	0219	2219-
18,000	0.0094	0.0066	0.49	2.46	14.79	26.06	C3	0220	2220-
22,000	0.0081	0.0057	0.42	2.72	16.35	29.23	D3	0221	2221-
27,000	0.0071	0.0050	0.37	3.02	18.11	32.46	E3	0222	2222-
200 volts dc rated voltage at +85°C				250 volts dc surge voltage at +85°C					
1000	0.0992	0.0694	5.62	0.67	4.02	3.83	A0	0223	2223-
1200	0.0822	0.0575	4.67	0.73	4.41	4.57	M0	0224	2224-
1500	0.0690	0.0483	3.88	0.82	4.93	5.26	B0	0225	2225-
1800	0.0557	0.0390	3.15	0.90	5.40	5.95	B0	0226	2226-
1800	0.0570	0.0399	3.21	0.90	5.40	6.43	A1	0227	2227-
2200	0.0460	0.0322	2.60	0.99	5.97	6.97	L0	0228	2228-
2200	0.0476	0.0333	2.67	0.99	5.97	7.44	M1	0229	2229-
2700	0.0379	0.0265	2.13	1.10	6.61	8.10	C0	0230	2230-
2700	0.0382	0.0267	2.15	1.10	6.61	8.46	M1	0231	2231-
3300	0.0314	0.0220	1.76	1.22	7.31	9.79	E0	0232	2232-
3300	0.0326	0.0228	1.82	1.22	7.31	9.59	B1	0233	2233-
3900	0.0270	0.0189	1.51	1.32	7.95	11.00	F0	0234	2234-
3900	0.0270	0.0189	1.51	1.32	7.95	10.72	B1	0235	2235-
4700	0.0226	0.0158	1.26	1.45	8.73	12.42	L1	0236	2236-
5600	0.0192	0.0134	1.07	1.59	9.52	14.18	C1	0237	2237-
5600	0.0202	0.0141	1.12	1.59	9.52	14.28	B2	0238	2238-
6800	0.0162	0.0113	0.90	1.75	10.50	16.24	D1	0239	2239-
6800	0.0172	0.0120	0.94	1.75	10.50	16.56	C2	0240	2240-
8200	0.0136	0.0095	0.75	1.92	11.53	19.15	F1	0241	2241-
8200	0.0142	0.0099	0.78	1.92	11.53	18.85	C2	0242	2242-
10,000	0.0121	0.0085	0.66	2.12	12.73	21.41	D2	0243	2243-
12,000	0.0104	0.0073	0.57	2.32	13.94	24.00	E2	0244	2244-
12,000	0.0111	0.0078	0.60	2.32	13.94	23.91	C3	0245	2245-
15,000	0.0094	0.0066	0.50	2.60	15.59	27.10	D3	0256	2246-
18,000	0.0083	0.0058	0.44	2.85	17.08	30.10	E3	0247	2247-
22,000	0.0073	0.0051	0.38	3.15	18.88	33.27	F3	0248	2248-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and CU72 capacitors - Continued.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
250 volts dc rated voltage at +85°C				300 volts dc surge voltage at +85°C					
680	0.1844	0.1291	10.01	0.62	3.71	2.81	A0	0249	2249-
820	0.1550	0.1085	8.40	0.68	4.07	3.25	M0	0250	2250-
1000	0.1255	0.0879	6.81	0.75	4.50	3.69	M0	0251	2251-
1200	0.1045	0.0732	5.67	0.82	4.93	4.34	B0	0252	2252-
1500	0.0839	0.0587	4.55	0.92	5.51	5.16	L0	0253	2253-
1500	0.0863	0.0604	4.66	0.92	5.51	5.22	A1	0254	2254-
1800	0.0703	0.0492	3.81	1.01	6.04	5.95	C0	0255	2255-
1800	0.0726	0.0508	3.92	1.01	6.04	6.02	M1	0256	2256-
2200	0.0580	0.0406	3.14	1.11	6.67	6.89	D0	0257	2257-
2200	0.0588	0.0412	3.18	1.11	6.67	6.82	M1	0258	2258-
2700	0.0478	0.0335	2.58	1.23	7.39	7.94	E0	0259	2259-
2700	0.0478	0.0335	2.58	1.23	7.39	8.06	B1	0260	2260-
3300	0.0393	0.0275	2.12	1.36	8.17	9.42	L1	0261	2261-
3900	0.0334	0.0234	1.80	1.48	8.89	10.75	C1	0262	2262-
4700	0.0280	0.0196	1.51	1.63	9.76	12.30	D1	0263	2263-
4700	0.0294	0.0206	1.57	1.63	9.76	11.84	B2	0264	2264-
5600	0.0238	0.0167	1.28	1.77	10.65	13.92	E1	0265	2265-
5600	0.0251	0.0176	1.34	1.77	10.65	13.74	C2	0266	2266-
6800	0.0200	0.0140	1.07	1.96	11.73	15.80	F1	0267	2267-
6800	0.0207	0.0145	1.11	1.96	11.73	15.64	C2	0268	2268-
8200	0.0175	0.0123	0.93	2.15	12.89	17.78	D2	0269	2269-
10,000	0.0148	0.0104	0.79	2.37	14.23	20.16	E2	0270	2270-
10,000	0.0156	0.0109	0.82	2.37	14.23	20.22	C3	0271	2271-
12,000	0.0133	0.0093	0.70	2.60	15.59	22.80	D3	0272	2272-
15,000	0.0112	0.0078	0.59	2.90	17.43	25.82	E3	0273	2273-
315 volts dc rated voltage at +85°C				365 volts dc surge voltage at +85°C					
330	0.5180	0.3626	52.42	0.48	2.90	1.68	A0	0274	2274-
390	0.4400	0.3080	44.52	0.53	3.15	1.92	M0	0275	2275-
470	0.3619	0.2533	36.63	0.58	3.46	2.17	M0	0276	2276-
560	0.3029	0.2120	30.66	0.63	3.78	2.55	B0	0277	2277-
560	0.3082	0.2157	31.18	0.63	3.78	2.76	A1	0278	2278-
680	0.2493	0.1745	25.23	0.69	4.17	2.99	L0	0279	2279-
680	0.2525	0.1768	25.55	0.69	4.17	3.29	M1	0280	2280-
820	0.2068	0.1448	20.93	0.76	4.57	3.47	C0	0281	2281-
820	0.2334	0.1634	23.56	0.76	4.57	3.42	M1	0282	2282-
1000	0.1699	0.1189	17.20	0.84	5.05	4.02	D0	0283	2283-
1000	0.1719	0.1203	17.39	0.84	5.05	3.98	M1	0284	2284-
1200	0.1419	0.0993	14.36	0.92	5.53	4.60	E0	0285	2285-
1200	0.1426	0.0998	14.43	0.92	5.53	4.67	B1	0286	2286-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and Cu72 capacitors - Continued.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
315 volts dc rated voltage at +85°C				365 volts dc surge voltage at +85°C					
1500	0.1141	0.0799	11.55	1.03	6.19	5.52	L1	0287	2287-
1800	0.0952	0.0666	9.63	1.13	6.78	6.37	C1	0288	2288-
2200	0.0781	0.0547	7.90	1.25	7.49	7.36	D1	0289	2289-
2200	0.0796	0.0557	8.05	1.25	7.49	7.19	B2	0290	2290-
2700	0.0640	0.0448	6.47	1.38	8.30	8.49	E1	0291	2291-
2700	0.0665	0.0466	6.72	1.38	8.30	8.46	C2	0292	2292-
3300	0.0534	0.0374	5.40	1.53	9.18	9.74	C2	0293	2293-
3900	0.0454	0.0318	4.59	1.66	9.98	11.04	D2	0294	2294-
4700	0.0378	0.0265	3.82	1.83	10.95	13.08	F2	0295	2295-
4700	0.0387	0.0271	3.91	1.83	10.95	12.82	C3	0296	2296-
5600	0.0328	0.0230	3.31	1.99	11.95	14.54	D3	0297	2297-
6800	0.0271	0.0190	2.74	2.20	13.17	17.22	F3	0298	2298-
350 volts dc rated voltage at +85°C				400 volts dc surge voltage at +85°C					
330	0.4991	0.3494	50.55	0.51	3.06	1.70	A0	0299	2299-
390	0.4194	0.2936	42.49	0.55	3.33	2.02	M0	0300	2300-
470	0.3556	0.2489	36.00	0.61	3.65	2.31	B0	0301	2301-
560	0.2918	0.2043	29.56	0.66	3.98	2.60	B0	0302	2302-
560	0.2970	0.2079	30.08	0.66	3.98	2.81	A1	0303	2303-
680	0.2402	0.1681	24.33	0.73	4.39	3.05	L0	0304	2304-
680	0.2491	0.1744	25.21	0.73	4.39	3.24	M1	0305	2305-
820	0.1993	0.1395	20.19	0.80	4.82	3.53	C0	0306	2306-
820	0.2012	0.1408	20.38	0.80	4.82	3.68	M1	0307	2307-
1000	0.1638	0.1147	16.59	0.89	5.32	4.10	D0	0308	2308-
1000	0.1694	0.1186	17.15	0.89	5.32	4.21	B1	0309	2309-
1200	0.1375	0.0963	13.93	0.97	5.83	4.75	B1	0310	2310-
1500	0.1100	0.0770	11.14	1.09	6.52	5.63	L1	0311	2311-
1800	0.0918	0.0643	9.30	1.19	7.14	6.48	C1	0312	2312-
1800	0.0929	0.0650	9.41	1.19	7.14	6.66	B2	0313	2313-
2200	0.0753	0.0527	7.63	1.32	7.90	7.50	D1	0314	2314-
2200	0.0775	0.0543	7.84	1.32	7.90	7.84	C2	0315	2315-
2700	0.0616	0.0431	6.24	1.46	8.75	9.00	F1	0316	2316-
2700	0.0622	0.0435	6.30	1.46	8.75	9.02	C2	0317	2317-
3300	0.0512	0.0358	5.18	1.61	9.67	10.39	D2	0318	2318-
4700	0.0366	0.0256	3.70	1.92	11.54	13.31	F2	0319	2319-
4700	0.0375	0.0263	3.79	1.92	11.54	13.03	C3	0320	2320-
5600	0.0314	0.0220	3.18	2.10	12.60	15.44	E3	0321	2321-
6800	0.0263	0.0184	2.66	2.31	13.88	17.50	F3	0322	2322-

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CUR72 and CU72 capacitors - Continued.

Capacitance µF	Maximum ESR		Maximum impedance -40°C, 120 Hz ohms	Maximum DCL		Maximum ac ripple current 120 Hz, +85°C A	Case size	CU72 Dash number	CUR72 Dash number 1/
	+25°C ohms	+85°C ohms		+25°C mA	+85°C mA				
400 volts dc rated voltage at +85°C				450 volts dc surge voltage at +85°C					
270	0.5537	0.3876	56.23	0.49	2.96	1.62	A0	0323	2323-
330	0.4676	0.3273	47.45	0.54	3.27	1.87	M0	0324	2324-
390	0.3815	0.2671	38.75	0.59	3.55	2.12	M0	0325	2325-
470	0.3156	0.2209	32.06	0.65	3.90	2.50	B0	0326	2326-
470	0.3212	0.2284	32.61	0.65	3.90	2.70	A1	0327	2327-
560	0.2646	0.1852	26.88	0.71	4.26	2.90	L0	0328	2328-
560	0.2706	0.1894	27.47	0.71	4.26	3.11	M1	0329	2329-
680	0.2181	0.1527	22.16	0.78	4.69	3.38	C0	0330	2330-
680	0.2201	0.1541	22.35	0.78	4.69	3.52	M1	0331	2331-
820	0.1811	0.1268	18.40	0.86	5.15	3.89	D0	0332	2332-
820	0.1849	0.1294	18.77	0.86	5.15	4.01	B1	0333	2333-
1000	0.1496	0.1047	15.19	0.95	5.69	4.55	B1	0334	2334-
1200	0.1245	0.0872	12.64	1.04	6.24	5.29	L1	0335	2335-
1500	0.0998	0.0699	10.14	1.16	6.97	6.22	C1	0336	2336-
1800	0.0834	0.0584	8.47	1.27	7.64	7.13	D1	0337	2337-
1800	0.0849	0.0594	8.62	1.27	7.64	6.96	B2	0338	2338-
2200	0.0684	0.0479	6.95	1.41	8.44	8.54	F1	0339	2339-
2200	0.0709	0.0496	7.19	1.41	8.44	8.19	C2	0340	2340-
2700	0.0569	0.0398	5.77	1.56	9.35	9.43	C2	0341	2341-
3300	0.0467	0.0327	4.74	1.72	10.34	11.34	E2	0342	2342-
3900	0.0398	0.0279	4.04	1.87	11.24	12.76	F2	0343	2343-
3900	0.0407	0.0285	4.13	1.87	11.24	12.50	C3	0344	2344-
4700	0.0341	0.0239	3.46	2.06	12.34	14.25	D3	0345	2345-
5600	0.0287	0.0201	2.91	2.24	13.47	16.75	F3	0346	2346-

1/ The last digit of the dash number shall indicate the failure rate level symbol ("M", "P", "R", or "S").

REQUIREMENTS - Continued:

Terminal strength: Method 211 of MIL-STD-202, test condition E.

Torque - 8 pound-inches (0.904 newton-meter) for case diameter of 1.375 inch (34.92 mm); 15 pound-inches (1.695 newton-meter) for all other case diameters.

Stability at reduced and high temperatures:

Step 1 (at 25°C):

DCL - See table I.
Cap. - See table I.
ESR - See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

Step 2 (at -40°C):

Impedance - See table I.
ΔCap. - Within the following percentages of the step 1 value:
5 through 15 V dc: ±40 percent.
25 through 250 V dc: ±30 percent.
315 and 350 V dc: ±35 percent.

Step 3 (at +25°C):

DCL - See table I.
ΔCap. - Within ±5 percent of step 1 value.
ESR - See table I.

Step 4 (at +85°C):

DCL - See table I.
ΔCap. - Within ±30 percent of step 1 value.
ESR - See table I.

Step 5 (at +25°C):

DCL - See table I.
ΔCap. - Within ±5 percent of step 1 value.
ESR - See table I.

Life: Method 108 of MIL-STD-202.

For qualification: Condition F (2,000 hours) at +105°C.

DCL - See table I.
ΔCap. - Within ±20 percent of initial measured value.
ESR - Not more than 150 percent of initial requirement.

For quality conformance: Performance check, condition B (250 hours) at +105°C (non-ER).

DCL - See table I.
ΔCap. - Within ±10 percent of initial measured value.
ESR - See table I.

For quality conformance: Continuation test (1,750 hours) at +105°C (non-ER).

DCL - See table I.
ΔCap. - Within ±20 percent of initial measured value.
ESR - Not more than 150 percent of initial requirement.

For quality conformance: 10,000 hours at +85°C (ER).

DCL - At +25°C, initial limit; at +85°C, 125 percent of initial limit.
ΔCap. - Within ±25 percent of initial measured value.
ESR - Not more than 200 percent of initial requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

Case insulation: In accordance with MIL-PRF-39018.

Shock (specified pulse): Method 213 of MIL-STD-202, condition H.

Vibration, low frequency: In accordance with MIL-PRF-39018.

Thermal shock and immersion:

Thermal shock: Method 107 of MIL-STD-202, condition A (2 cycles, 30 minutes).

Immersion: Method 104 of MIL-STD-202, condition B (2 cycles, 30 minutes).

DCL - See table I.
ΔCap. - Within ±5 percent of initial measured value.
ESR - See table I.
Case insulation - Shall meet initial requirements.

Surge voltage: In accordance with MIL-PRF-39018.

DCL - See table I.
ΔCap. - Within ±6 percent of initial measured value.
ESR - See table I.

Vent: In accordance with MIL-PRF-39018.

Moisture resistance: Method 106 of MIL-STD-202.

DCL - See table I.
ΔCap. - Within ±6 percent of initial measured value.
ESR - See table I.
Case insulation - Shall meet initial requirements.

High temperature exposure: In accordance with MIL-PRF-39018.

DCL - Not more than 200 percent of initial requirement.
ΔCap. - Within ±20 percent of initial measured value.
ESR - Not more than 200 percent of initial requirement.

Reverse voltage aging: In accordance with MIL-PRF-39018.

Marking: In accordance with MIL-PRF-39018.

Part or Identifying Number (PIN): M39018/12- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - AS, MC, OS,SH
Air Force - 19, 99

Preparing activity:
DLA - ES

(Project 5910-1927)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:06Z
Check the source to verify that this is the current version before use.