NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-39018/30
23 March 1978
SUPERSEDING
MIL-C-0039018/3C(USAF)
17 May 1974, and
MIL-C-39018/3A
23 March 1972


PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (ALUMINUM OXIDE) (POLARIZED), NON-ESTABLISHED RELIABILITY AND ESTABLISHED RELIABILITY, STYLES CU16 (UNINSULATED), CU17 (INSULATED), AND CUR17 (INSULATED)

STYLE CU16 INACTIVE FOR DESIGN AFTER 23 MARCH 1972.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors herein shall consist of this document and the latest issue of Specification MIL-C-39018

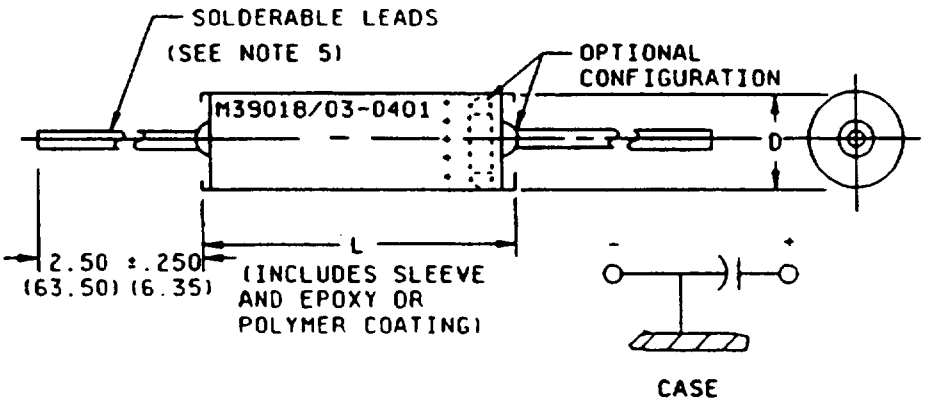

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. These capacitors are not intended to be mounted by their leads.
5. For .625 diameter case, the leads shall be .032 +.008, -.002 diameter and for all other diameter cases the leads shall be .040 +.008 -.002 diameter.
6. The "D" dimension for styles CU17 and CUR17 shall be not more than .008 larger than the specified bare case diameter.

FIGURE 1. Styles CU16, CU17, and CUR17 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

INCHES	MM
.002	.05
.008	.20
.015	.38
.032	.81
.040	1.02
.625	15.88
.750	19.05
.875	22.22
1.000	25.40
1.125	28.58
1.328	33.73
1.625	41.28
1.828	46.43
2.125	53.98
2.328	59.13
2.625	66.68
2.828	71.83
3.125	79.38
3.328	84.53
3.625	92.08
3.828	97.23

Case size	Dimensions		
	L		D ±.015 See note 6
	Min	Max	
D1	1.125	.328	.625
D2	1.125	1.328	.750
D3	1.125	1.328	.875
D4	1.625	1.828	.625
D5	1.625	1.828	.750
D6	1.625	1.828	.875
D7	1.625	1.828	1.000
E1	2.125	2.328	.625
E2	2.125	2.328	.750
E3	2.125	2.328	.875
E4	2.125	2.328	1.000
E5	2.625	2.828	.625
E6	2.625	2.828	.750
E7	2.625	2.828	.875
F1	2.625	2.828	1.000
F2	3.125	3.328	.625
F3	3.125	3.328	.875
F4	3.125	3.328	1.000
F5	3.625	3.828	.750
F6	3.625	3.828	.875
F7	3.625	3.328	1.000

FIGURE 1. Styles CU16, CU17 and CUR 7 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Type - Tubular.
Material - Metal.
Leads - See figure.

DC rated voltage: See table I.

Reverse voltage: 3.0 volts maximum

Capacitance (Cap.) value: See table I.

Cap. tolerance: See table I.

Faliure rate level (CUR17 only): M, P, R, and S.

Operating temperature range: -55° to 105°C.

Burn-in (CUR17 only): In accordance with MIL-C-39018.

DC leakage (DCL): See table I.

Equivalent series resistance (ESR): See table I.

Low temperature exposure.
DCL - See table I.
Cap. - See table I.
ESR - See table I.

Terminal strength: Method 211 of MIL-STD-202, test conditions A (3 pounds)and D (3 rotations).

Solderability: In accordance with MIL-C-39018.

Stability at reduced and high temperatures:
Step 1 (at +25°C):
DCL - See table I.
Cap. - See table I.
ESR - See table I.
Step 2 (at -55°C):
Impedance - See table I.
ΔCap. - Within the following percentages of the step 1 value:
7 Vdc: ±35 percent.
10 to 30 Vdc inclusive: ±25 percent.
50 to 350 Vdc inclusive: ±20 percent.
Step 3 (at +25°C):
DCL - See table I.
ΔCap. - Within ±5 percent of step 1 value.
ESR - See table I.
Step 4 (at +105°C):
DCL - See table I.
ΔCap. - Within ±30 percent of step 1 value.
ESR - See table I.
Step 5 (at +25°C):
DCL - See table I.
ΔCap. - Within ±5 percent of step 1 value.
ESR - See table I.

Life: Method 108 of MIL-STD-202.
For qualification: Condition F (2,000 hours) at 85°C.
DCL - See table I.
ΔCap. - Within ±10 percent of initial measured value.
ESR - Not more than 130 percent of initial requirement.
For quality conformance: Performance check, condition B (250 hours) at 85°C (non-ER).
DCL - See table I.
ΔCap. - Within ±10 percent of initial measured value.
ESR - See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CU16, CU17,

DC rated voltage 85°C & 105°C	Capacitance	DC surge voltage 85°C & 105°C	ESR		Impedance (max)	DF		AC ripple current (max) 120 Hz @ 85°C 1/	Case size
			25°C	105°C	@ -55°C & 120 Hz	Leakage 25°C	Leakage 105°C		
Volts	µF	Volts	Ω		Ω	µA	µA	mA	
7	680	10	.78	.98	5	30	183	489	D1
7	1,000	10	.53	.66	9.3	35	212	644	D2
7	1,500	10	.35	.44	6.2	43	259	885	D4
7	2,200	10	.24	.30	4.2	50	300	1220	E1
7	3,300	10	.16	.20	2.9	66	396	1520	D6
7	4,700	10	.11	.14	2.0	75	450	1930	D7
7	6,800	10	.08	.10	1.3	90	540	2930	F5
7	10,000	10	.05	.07	.93	111	670	3850	F4
7	12,000	10	.04	.06	.77	127	762	4510	F7
10	470	15	.99	1.19	8.9	35	212	454	D1
10	1,000	15	.46	.63	4.3	50	300	807	D4
10	1,500	15	.31	.35	2.7	61	367	1130	E1
10	2,200	15	.21	.24	1.8	70	424	1390	D6
10	3,300	15	.14	.17	1.3	92	556	1950	E3
10	4,700	15	.10	.11	.86	110	663	2750	F5
10	6,300	15	.07	.09	.69	127	764	3570	F6
10	8,200	15	.06	.05	.53	150	900	4180	F7
15	390	20	.85	1.02	10	38	232	478	D1
15	680	20	.49	.59	5.9	49	296	689	D2
15	1,000	20	.33	.40	4.0	61	367	1060	E1
15	1,500	20	.22	.27	2.7	75	450	1420	E2
15	2,200	20	.15	.18	1.8	86	519	1990	E6
15	3,300	20	.10	.12	1.2	110	662	2990	E4
15	4,700	20	.07	.09	.86	130	780	3850	F6
15	6,800	20	.05	.06	.60	156	936	4360	F7
30	150	40	2.21	2.65	27	33	201	296	D1
30	220	40	1.51	1.81	14	47	284	390	D2
30	330	40	1.00	1.21	12	51	307	536	D4
30	470	40	.71	.85	10	54	328	609	D3
30	680	40	.44	.59	6.0	79	418	957	E5
30	1,000	40	.33	.40	4.0	98	519	1230	E3
75	150	90	.88	2.65	16	56	337	338	D3
75	220	90	.60	1.81	13	68	410	540	E2
75	330	90	.40	1.21	8.1	80	483	781	E7
75	470	90	.28	.34	5.7	91	551	1010	F3
75	680	90	.20	.59	3.9	110	662	1290	F4
75	820	90	.16	.49	3.2	122	734	1520	F7

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

and CUR17 capacitors.

Dash number											
Style CU16			Style CU17 2/			Style CUR17 3/ low frequency vibration			Style CUR17 3/ high frequency vibration		
Capacitance tolerance			Capacitance tolerance			Capacitance tolerance			Capacitance tolerance		
-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75
0401	---	0501	0601-	---	0701-	1001-	---	1101-	1201-	---	1301-
0402	---	0502	0602-	---	0702-	1002-	---	1102-	1202-	---	1302-
0403	---	0503	0603-	---	0703-	1003-	---	1103-	1203-	---	1303-
0404	---	0504	0604-	---	0704-	1004-	---	1104-	1204-	---	1304-
0405	---	0505	0605-	---	0705-	1005-	---	1105-	1205-	---	1305-
0406	---	0506	0606-	---	0706-	1006-	---	1106-	1206-	---	1306-
0407	---	0507	0607-	---	0707-	1007-	---	1107-	1207-	---	1307-
0408	---	0508	0608-	---	0708-	1008-	---	1108-	1208-	---	1308-
0409	---	0509	0609-	---	0709-	1009-	---	1109-	1209-	---	1309-
0410	---	0510	0610-	---	0710-	1010-	---	1110-	1210-	---	1310-
0411	---	0511	0611-	---	0711-	1011-	---	1111-	1211-	---	1311-
0412	---	0512	0612-	---	0712-	1012-	---	1112-	1212-	---	1312-
0413	---	0513	0613-	---	0713-	1013-	---	1113-	1213-	---	1313-
0414	---	0514	0614-	---	0714-	1014-	---	1114-	1214-	---	1314-
0415	---	0515	0615-	---	0715-	1015-	---	1115-	1215-	---	1315-
0416	---	0516	0616-	---	0716-	1016-	---	1116-	1216-	---	1316-
0417	---	0517	0617-	---	0717-	1017-	---	1117-	1217-	---	1317-
0418	---	0518	0618-	---	0718-	1018-	---	1118-	1218-	---	1318-
0419	---	0519	0619-	---	0719-	1019-	---	1119-	1219-	---	1319-
0420	---	0520	0620-	---	0720-	1020-	---	1120-	1220-	---	1320-
0421	---	0521	0621-	---	0721-	1021-	---	1121-	1221-	---	1321-
0422	---	0522	0622-	---	0722-	1022-	---	1122-	1222-	---	1322-
0423	---	0523	0623-	---	0723-	1023-	---	1123-	1223-	---	1323-
0424	---	0524	0624-	---	0724-	1024-	---	1124-	1224-	---	1324-
0425	---	0525	0625-	---	0725-	1025-	---	1125-	1225-	---	1325-
0426	---	0526	0626-	---	0726-	1026-	---	1126-	1226-	---	1326-
0427	---	0527	0627-	---	0727-	1027-	---	1127-	1227-	---	1327-
0428	---	0528	0628-	---	0728-	1028-	---	1128-	1228-	---	1328-
0429	---	0529	0629-	---	0729-	1029-	---	1129-	1229-	---	1329-
0430	---	0530	0630-	---	0730-	1030-	---	1130-	1230-	---	1330-
0431	---	0531	0631-	---	0731-	1031-	---	1131-	1231-	---	1331-
0432	---	0532	0632-	---	0732-	1032-	---	1132-	1232-	---	1332-
0433	---	0533	0633-	---	0733-	1033-	---	1133-	1233-	---	1333-
0434	---	0534	0634-	---	0734-	1034-	---	1134-	1234-	---	1334-
0435	---	0535	0635-	---	0735-	1035-	---	1135-	1235-	---	1335-
0436	---	0536	0636-	---	0736-	1036-	---	1136-	1236-	---	1336-
0437	---	0537	0637-	---	0737-	1037-	---	1137-	1237-	---	1337-
0438	---	0538	0638-	---	0738-	1038-	---	1138-	1238-	---	1338-
0439	---	0539	0639-	---	0739-	1039-	---	1139-	1239-	---	1339-
0440	---	0540	0640-	---	0740-	1040-	---	1140-	1240-	---	1340-
0441	---	0541	0641-	---	0741-	1041-	---	1141-	1241-	---	1341-
0442	---	0542	0642-	---	0742-	1042-	---	1142-	1242-	---	1342-
---	---	---	0699-	---	0799-	1099-	---	1199-	1299-	---	1399-
0443	---	0543	0643-	---	0743-	1043-	---	1143-	1243-	---	1343-
0444	---	0544	0644-	---	0744-	1044-	---	1144-	1244-	---	1344-
0445	---	0545	0645-	---	0745-	1045-	---	1145-	1245-	---	1345-
0446	---	0546	0646-	---	0746-	1046-	---	1146-	1246-	---	1346-
0447	---	0547	0647-	---	0747-	1047-	---	1147-	1247-	---	1347-
0448	---	0548	0648-	---	0748-	1048-	---	1148-	1248-	---	1348-
0449	---	0549	0649-	---	0749-	1049-	---	1149-	1249-	---	1349-
0450	---	0550	0650-	---	0750-	1050-	---	1150-	1250-	---	1350-
0451	---	0551	0651-	---	0751-	1051-	---	1151-	1251-	---	1351-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CU16, CU17.

DC rated voltage 85°C & 105°C	Capacitance	DC surge voltage 85°C & 105°C	ESR		Impedance (max) @ -55°C & 120 Hz	DC leakage		AC ripple current (max) 120 Hz @ 85°C 1/	Case size
			25°C	105°C		25°C	105°C		
Volts	µF	Volts	Ω		Ω	µA		mA	
100	22	125	6.03	18.09	125	25	150	113	D1
100	47	125	2.82	8.47	57	33	201	180	D2
100	68	125	1.95	5.85	39	40	241	232	D3
100	100	125	1.33	3.98	27	50	300	389	F2
100	150	125	.88	2.65	18	61	367	444	D7
100	220	125	.60	1.81	13	79	474	613	E4
100	330	125	.40	1.21	8.1	93	563	906	F6
100	470	125	.28	.84	5.6	171	670	1150	F7
150	18	175	7.37	22.10	150	25	155	103	D1
150	33	175	4.02	12.06	81	36	217	170	D4
150	47	175	2.82	8.47	57	41	246	192	D3
150	68	175	1.95	5.85	39	49	296	304	E5
150	100	175	1.33	3.98	27	61	367	362	D7
150	150	175	.88	2.65	18	77	464	528	E7
150	220	175	.60	1.81	12	86	519	627	F1
150	330	175	.40	1.21	8.0	114	687	966	F7
200	15	225	8.84	26.53	180	27	164	94	D1
200	33	225	4.02	12.06	81	41	244	162	D3
200	47	225	2.82	8.47	57	47	284	230	E1
200	68	225	1.95	5.85	39	59	354	304	E5
200	100	225	1.33	3.98	27	70	424	362	D7
200	150	225	.88	2.65	18	86	519	506	E4
200	220	225	.60	1.81	12	109	657	736	F4
200	270	225	.49	1.47	9.8	120	722	873	F7
250	10	275	13.26	39.79	270	25	150	96	D1
250	20	275	5.63	19.89	135	35	210	131	D4
250	33	275	4.02	12.06	82	45	270	212	E5
250	39	275	3.40	10.20	65	50	300	240	F2
250	68	275	1.95	5.85	40	67	402	299	D7
250	82	275	1.62	4.85	35	80	480	374	E4
250	120	275	1.11	3.32	25	94	564	548	F6
250	180	275	.74	2.21	15	111	666	712	F7
300	8.2	325	24.26	48.52	320	25	150	69	D1
300	15	325	13.26	26.53	170	35	210	114	D4
300	27	325	7.37	14.74	93	48	288	166	D5
300	47	325	4.23	8.47	54	63	378	275	E6
300	68	325	2.93	5.85	37	77	462	355	E7
300	82	325	2.43	4.85	31	87	522	423	F3
300	120	325	1.66	3.32	21	96	576	547	F6
300	150	325	1.33	2.65	17	112	672	650	F7
350	5.6	375	35.53	71.05	450	25	150	57	D1
350	20	375	9.95	19.89	125	42	252	150	E1
350	27	375	7.37	14.74	93	53	318	208	F2
350	47	375	4.23	8.47	54	66	396	248	D7
350	56	375	3.55	7.11	45	75	450	332	E7
350	82	375	2.43	4.25	31	86	516	422	F3
350	120	375	1.66	3.32	21	112	672	581	F7

1/ The ripple current values shown are representive values not supported by test data.

2/ Dash number will include the letter "H" to indicate high frequency vibration (when applicable) or "-" will be deleted.

3/ The last letter in the dash number will indicate the applicable FR level symbol ("M", "P", "R", or "S").

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

and CUR17 capacitors - Continued.

Dash number												
Style CU16			Style CU17 2/			Style CUR17 3/ low frequency vibration			Style CUR17 3/ high frequency vibration		
Capacitance tolerance			Capacitance tolerance			Capacitance tolerance			Capacitance tolerance		
-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75
0452	0552	---	0652-	0752-	---	1052-	1152-	---	1252-	1352-	---
0453	0553	---	0653-	0753-	---	1053-	1153-	---	1253-	1353-	---
0454	0554	---	0654-	0754-	---	1054-	1154-	---	1254-	1354-	---
0455	0555	---	0655-	0755-	---	1055-	1155-	---	1255-	1355-	---
0456	0556	---	0656-	0756-	---	1056-	1156-	---	1256-	1356-	---
0457	0557	---	0657-	0757-	---	1057-	1157-	---	1257-	1357-	---
0458	0558	---	0658-	0758-	---	1058-	1158-	---	1258-	1358-	---
0459	0559	---	0659-	0759-	---	1059-	1159-	---	1259-	1359-	---
0460	0560	---	0660-	0760-	---	1060-	1160-	---	1260-	1360-	---
0461	0561	---	0661-	0761-	---	1061-	1161-	---	1261-	1361-	---
0462	0562	---	0662-	0762-	---	1062-	1162-	---	1262-	1362-	---
0463	0563	---	0663-	0763-	---	1063-	1163-	---	1263-	1363-	---
0464	0564	---	0664-	0764-	---	1064-	1164-	---	1264-	1364-	---
0465	0565	---	0665-	0765-	---	1065-	1165-	---	1265-	1365-	---
0466	0566	---	0666-	0766-	---	1066-	1166-	---	1266-	1366-	---
0467	0567	---	0667-	0767-	---	1067-	1167-	---	1267-	1367-	---
0468	0568	---	0668-	0768-	---	1068-	1168-	---	1268-	1368-	---
0469	0569	---	0669-	0769-	---	1069-	1169-	---	1269-	1369-	---
0470	0570	---	0670-	0770-	---	1070-	1170-	---	1270-	1370-	---
0471	0571	---	0671-	0771-	---	1071-	1171-	---	1271-	1371-	---
0472	0572	---	0672-	0772-	---	1072-	1172-	---	1272-	1372-	---
0473	0573	---	0673-	0773-	---	1073-	1173-	---	1273-	1373-	---
0474	0574	---	0674-	0774-	---	1074-	1174-	---	1274-	1374-	---
0475	0575	---	0675-	0775-	---	1075-	1175-	---	1275-	1375-	---
0476	0576	---	0676-	0776-	---	1076-	1176-	---	1276-	1376-	---
0477	0577	---	0677-	0777-	---	1077-	1177-	---	1277-	1377-	---
0478	0578	---	0678-	0778-	---	1078-	1178-	---	1278-	1378-	---
0479	0579	---	0679-	0779-	---	1079-	1179-	---	1279-	1379-	---
0480	0580	---	0680-	0780-	---	1080-	1180-	---	1280-	1380-	---
0481	0581	---	0681-	0781-	---	1081-	1181-	---	1281-	1381-	---
0482	0582	---	0682-	0782-	---	1082-	1182-	---	1282-	1382-	---
0483	0583	---	0683-	0783-	---	1083-	1183-	---	1283-	1383-	---
0484	0584	---	0684-	0784-	---	1084-	1184-	---	1284-	1384-	---
0485	0585	---	0685-	0785-	---	1085-	1185-	---	1285-	1385-	---
0486	0586	---	0686-	0786-	---	1086-	1186-	---	1286-	1386-	---
0487	0587	---	0687-	0787-	---	1087-	1187-	---	1287-	1387-	---
0488	0588	---	0688-	0788-	---	1088-	1188-	---	1288-	1388-	---
0489	0589	---	0689-	0789-	---	1089-	1189-	---	1289-	1389-	---
0490	0590	---	0690-	0790-	---	1090-	1190-	---	1290-	1390-	---
0491	0591	---	0691-	0791-	---	1091-	1191-	---	1291-	1391-	---
0492	0592	---	0692-	0792-	---	1092-	1192-	---	1292-	1392-	---
0403	0593	---	0693-	0793-	---	1093-	1193-	---	1293-	1393-	---
0494	0594	---	0694-	0794-	---	1094-	1194-	---	1294-	1394-	---
0495	0595	---	0695-	0795-	---	1095-	1195-	---	1295-	1395-	---
0496	0596	---	0696-	0796-	---	1096-	1196-	---	1296-	1396-	---
0497	0597	---	0697-	0797-	---	1097-	1197-	---	1297-	1397-	---
0498	0598	---	0698-	0798-	---	1098-	1198-	---	1298-	1398-	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

For quality conformance: Continuous test (1,250 hours) at [illegible] (see E4).
DCL - See table I.
ΔCap. - Within ±15 percent of initial measured value.
ESR - Not more than 130 percent of initial requirement.
For quality conformance: 10,000 hours (ER) at 85°C.
DCL - At 25°C initial limit, at 85°C 125 percent of initial limit.
ΔCap. - Within ±25 percent of initial measured value.
ESR - Not more than 200 percent of initial requirement.

Case insulation (CU17 and CUR17 only): In accordance with MIL-C-39018.

Vibration:
Low frequency - Method 201, MIL-STD-202.
High frequency (when specified, see ordering data) - In accordance with MIL-C-39018 with the following exceptions: Test condition letter A, duration and direction of motion - In accordance with method 204 of MIL-STD-202.

Thermal shock and immersion:
Thermal shock: Method 107 of MIL-STD-202, condition A.
Immersion: Method 104 of MIL-STD-202, condition B (2 cycles, 30 minutes).
DCL - See table I.
ΔCap. - Within ±5 percent of initial measured value.
ESR - See table I.
Case insulation (CU17 and CUR17 only): Shall meet initial requirements.

Surge voltage:
DCL - See table I.
ΔCap. - Within ±6 percent of initial measured value.
ESR - See table I.

Moisture resistance:
Method 106 of MIL-STD-202.
DCL - See table I.
ΔCap. - Within ±6 percent of initial measured value.
ESR - See table I.
Case insulation (CU17 and CUR17 only): Shall meet initial requirements.

High temperature exposure (500 hours at 105°C):
DCL - Not more than 200 percent of initial requirement.
ΔCap. - Within ±10 percent of initial measured value.
ESR - Not more than 115 percent of initial requirement.

Reverse voltage:
After 125 hours at 105°C with $1^{+0}_{-.1}$ reverse volt applied to units rated at 7 Vdc and $3^{+0}_{-.3}$ reverse volts applied to all others.
After additional 125 hours at 105°C with rated forward voltage applied:
DCL - Within 125 percent of initial requirement.
ΔCap. - Within the following percentages of initial measured value:
7 to 30 Vdc inclusive:
+10, -25 percent
50 to 350 Vdc inclusive:
±10 percent.
ESR - See table I.

Penetration of solvents: In accordance with MIL-C-39018.

High temperature verification: In accordance with MIL-C-39018 at 105°C with rated voltage applied.

DCL - See table I.
ΔCap. - Within 10 percent of initial measured value.
ESR - Not more than 130 percent of initial requirement.

Reverse voltage aging: In accordance with MIL-C-39018.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

Marking: In accordance with MIL-C-39018.
Part number: M39018/03- (dash number from table I).
For CU17 and CUR17, the complete dash number will include additional letter sysmbol (s) as shown in table I.

Substitutability data: See table II.

Ordering data: In addition to the data specified in MIL-C-39018, procurement documents should specify those capacitors which are to be tested to high frequency vibration.

TABLE II. Substitutability data.

Dash no. in MIL-C-39018/3A /3B						Dash no. in MIL-C-39018/3					
Style CU16			Style CU17 1/			Style CU16			Style CU17		
Capacitance tolerance			Capacitance tolerance			Capacitance tolerance			Capacitance tolerance		
-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75
0401	---	0501	0601	---	0701	0001	---	0002	0003	---	0004
0402	---	0502	0602	---	0702	0005	---	0006	0007	---	0008
0403	---	0503	0603	---	0703	0009	---	0010	0011	---	0012
0404	---	0504	0604	---	0704	0013	---	0014	0015	---	0016
0405	---	0505	0605	---	0705	0017	---	0018	0019	---	0020
0406	---	0506	0606	---	0706	0021	---	0022	0023	---	0024
0407	---	0507	0607	---	0707	0025	---	0026	0027	---	0028
0408	---	0508	0608	---	0708	0029	---	0030	0031	---	0032
0409	---	0509	0609	---	0709	0033	---	0034	0035	---	0036
0410	---	0510	0610	---	0710	0037	---	0038	0039	---	0040
0411	---	0511	0611	---	0711	0041	---	0042	0043	---	0044
0412	---	0512	0612	---	0712	0045	---	0046	0047	---	0048
0413	---	0513	0613	---	0713	0049	---	0050	0051	---	0052
0414	---	0514	0614	---	0714	0053	---	0054	0055	---	0056
0415	---	0515	0615	---	0715	0057	---	0058	0059	---	0060
0416	---	0516	0616	---	0716	0061	---	0062	0063	---	0064
0417	---	0517	0617	---	0717	0065	---	0066	0067	---	0068
0418	---	0518	0618	---	0718	0069	---	0070	0071	---	0072
0419	---	0519	0619	---	0719	0073	---	0074	0075	---	0076
0420	---	0520	0620	---	0720	0077	---	0078	0079	---	0080
0421	---	0521	0621	---	0721	0081	---	0082	0083	---	0084
0422	---	0522	0622	---	0722	0085	---	0086	0087	---	0088
0423	---	0523	0623	---	0723	0089	---	0090	0091	---	0092
0424	---	0524	0624	---	0724	0093	---	0094	0095	---	0096
0425	---	0525	0625	---	0725	0097	---	0098	0099	---	0100
0426	---	0526	0626	---	0726	0101	---	0102	0103	---	0104
0427	---	0527	0627	---	0727	0105	---	0106	0107	---	0108
0428	---	0528	0628	---	0728	0109	---	0110	0111	---	0112
0429	---	0529	0629	---	0729	0113	---	0114	0115	---	0116
0430	---	0530	0630	---	0730	0117	---	0118	0119	---	0120
0431	---	0531	0631	---	0731	0121	---	0122	0123	---	0124
0432	---	0532	0632	---	0732	0125	---	0126	0127	---	0128
0433	---	0533	0633	---	0733	0129	---	0130	0131	---	0132
0434	---	0534	0634	---	0734	0133	---	0134	0135	---	0136
0435	---	0535	0635	---	0735	0137	---	0138	0139	---	0140
0436	---	0536	0636	---	0736	0141	---	0142	0143	---	0144
0437	---	0537	0637	---	0737	0145	---	0146	0147	---	0148
0438	---	0538	0638	---	0738	0149	---	0150	0151	---	0152

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. [illegible]

Dash no. in MIL-C-39018/3A /3B						Dash no. in MIL-C-39018/3					
Style CU16			Style CU17 1/			Style CU16			Style CU17		
Capacitance tolerance			Capacitance tolerance			Capacitance tolerance			Capacitance tolerance		
-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75	-10 +30	-10 +50	-10 +75
0439	---	0539	0639	---	0739	0153	---	0154	0155	---	0156
0440	---	0540	0640	---	0740	0157	---	0158	0159	---	0160
0441	---	0541	0641	---	0741	0161	---	0162	0163	---	0164
0442	---	0542	0642	---	0742	0165	---	0166	0167	---	0168
0443	---	0543	0643	---	0743	0169	---	0170	0171	---	0172
0444	---	0544	0644	---	0744	0173	---	0174	0175	---	0176
0445	---	0545	0645	---	0745	0177	---	0178	0179	---	0180
0446	---	0546	0646	---	0746	0181	---	0182	0183	---	0184
0447	---	0547	0647	---	0747	0185	---	0186	0187	---	0188
0448	---	0548	0648	---	0748	0189	---	0190	0191	---	0192
0449	---	0549	0649	---	0749	0193	---	0194	0195	---	0196
0450	---	0550	0650	---	0750	0197	---	0198	0199	---	[illegible]
0451	---	0551	0651	---	0751	0201	---	0202	0203	---	[illegible]
0452	0552	---	0652	0752	---	0205	0206	---	0207	0208	---
0453	0553	---	0653	0753	---	0209	0210	---	0211	0212	---
0454	0554	---	0654	0754	---	0213	0214	---	0215	0216	---
0455	0555	---	0655	0755	---	0217	0218	---	0219	0220	---
0456	0556	---	0656	0756	---	0221	0222	---	0223	0224	---
0457	0557	---	0657	0757	---	0225	0226	---	0227	0228	---
0458	0558	---	0658	0758	---	0229	0230	---	0231	0232	---
0459	0559	---	0659	0759	---	0233	0234	---	0235	0236	---
0460	0560	---	0660	0760	---	0237	0238	---	0239	0240	---
0461	0561	---	0661	0761	---	0241	0242	---	0243	0244	---
0462	0562	---	0662	0762	---	0245	0246	---	0247	0248	---
0463	0563	---	0663	0763	---	0249	0250	---	0251	0252	---
[illegible]	0564	---	0664	0764	---	0253	0254	---	0255	0256	---
0465	0565	---	0665	0765	---	257	0258	---	0259	0260	---
0466	0566	---	0666	0766	---	[illegible]	0262	---	0263	0264	---
0467	0567	---	0667	0767	---	[illegible]	0266	---	0267	0268	---
0468	0568	---	0668	0768	---	[illegible]	0270	---	0271	0272	---
0469	0569	---	0669	0769	---	[illegible]	0274	---	0275	0276	---
0470	0570	---	0670	0770	---	[illegible]	0278	---	0279	0280	---
0471	0571	---	0671	0771	---	0281	0282	---	0283	0284	---
0472	0572	---	0672	0772	---	0285	[illegible]	---	0287	0288	---
0473	0573	---	0673	0773	---	0289	0290	---	0291	0292	---
0474	0574	---	0674	0774	---	0293	0294	---	0295	0296	---
0475	0575	---	0675	0775	---	0297	0298	---	0299	0300	---

1/ Style CUR17 may be substituted for style CU17.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Navy - CG, MC, AS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1185-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. OCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.