
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC
(ALUMINUM OXIDE) (POLARIZED),
STYLE CU71

This limited coordination Military specification sheet has been prepared by the Air Force Aeronautical Systems Division based upon currently available technical information, but it has not been approved for promulgation as a coordinated revision of Military Specification Sheet MIL-C-39018/4. It is subject to modification. However, pending its promulgation as a coordinated Military specification sheet, it may be used.

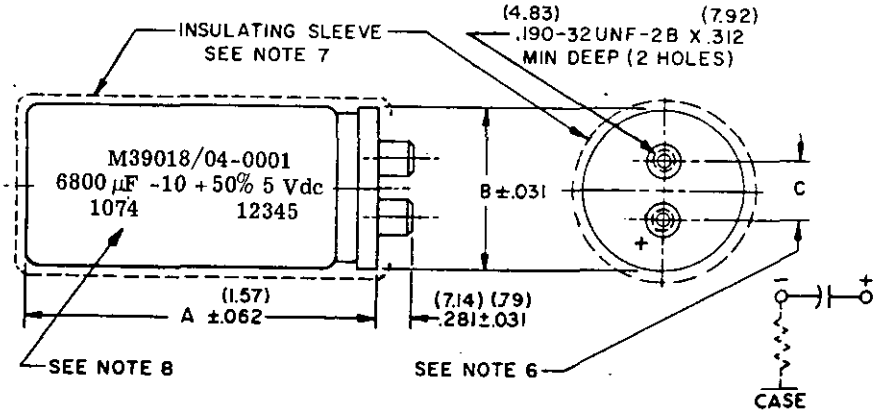

STYLE CU71 - insulated

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Capacitors are mounted by means of a wraparound, footed-type bracket.
5. There is an indeterminate resistance between the metal case and the negative terminal.
6. "C" dimension is .500 (12.70 mm) for case diameter of 1.375 (34.93 mm); .875 (22.23 mm) +.015 (.38 mm) -.078 (1.98 mm) for case diameter of 2.000 (50.80 mm); 1.125 (28.58 mm) ±.016 (.41 mm) for case diameter of 2.50 (63.5 mm); and 1.250 (31.75 mm) ±.016 (.41 mm) for case diameter of 3.0 (76.2 mm).
7. Insulating sleeve thickness shall not exceed .016 (.41 mm) and shall overlap the ends of the capacitor body.
8. Example of part number and its relative location on the capacitor body.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

CU71 case code

Case code	Dimensions A ±.062 (1.57) Nominal	Dimensions B ±.031 (.79) Nominal	Case code	Dimensions A ±.062 (1.57) Nominal	Dimensions B ±.031 (.79) Nominal
A0	2.125 (53.98)	1.375 (34.93)	F1	5.625 (142.88)	2.000 (50.80)
B0	3.125 (79.38)	1.375 (34.93)	B2	3.125 (79.38)	2.500 (63.60)
C0	4.125 (104.78)	1.375 (34.93)	C2	4.125 (104.78)	2.500 (63.60)
D0	4.625 (117.48)	1.375 (34.93)	D2	4.625 (117.48)	2.500 (63.60)
E0	5.125 (130.18)	1.375 (34.93)	E2	5.125 (130.18)	2.500 (63.60)
F0	5.625 (142.88)	1.375 (34.93)	F2	5.625 (142.88)	2.500 (63.60)
A1	2.125 (53.98)	2.000 (50.80)	C3	4.125 (104.78)	3.000 (76.20)
B1	3.125 (79.38)	2.000 (50.80)	D3	4.625 (117.48)	3.000 (76.20)
C1	4.125 (104.78)	2.000 (50.80)	E3	5.125 (130.18)	3.000 (76.20)
D1	4.625 (117.48)	2.000 (50.80)	F3	5.625 (142.88)	3.000 (76.20)
E1	5.125 (130.18)	2.000 (50.80)			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CU71 capacitors.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance		Maximum impedance at -55°C and 120 Hz	DC leakage		Maximum AC ripple current 120 Hz @ 85°C	Case code	Dash number
			25°C	85°C		25°C	85°C			
Volts	µF	Volts	Ω		Ω	mA		Amps		
5	6,800	7	.15	.19	1.2	.28	1.68	2.50	A0	0001
5	8,000	7	.13	.17	1.00	.30	1.85	2.68	A0	1002
5	10,000	7	.10	.13	.88	.34	2.04	2.85	A0	0002
5	15,000	7	.07	.08	.55	.41	2.46	4.24	B0	0003
5	17,000	7	.06	.07	.48	.45	2.63	4.54	B0	1005
5	22,000	7	.05	.06	.33	.50	3.00	5.84	C0	0004
5	25,000	7	.045	.06	.30	.53	3.18	6.14	C0	1007
5	29,000	7	.039	.05	.28	.57	3.43	6.98	D0	1008
5	33,000	7	.032	.040	.25	.61	3.66	8.30	F0	0005
5	34,000	7	.032	.040	.24	.62	3.71	7.81	E0	1010
5	37,000	7	.032	.040	.21	.65	3.86	8.14	F0	1011
5	40,000	7	.033	.040	.18	.67	4.02	7.62	B1	1012
5	47,000	7	.034	.040	.15	.73	4.38	9.40	C1	0006
5	60,000	7	.031	.033	.13	.82	4.61	10.23	C1	1014
5	67,000	7	.028	.030	.12	.87	4.95	10.88	B2	1015
5	68,000	7	.023	.027	.11	.88	5.28	10.30	D1	0007
5	80,000	7	.022	.025	.095	.95	6.04	13.11	E1	1017
5	90,000	7	.021	.024	.082	.99	6.32	14.37	F1	1018
5	100,000	7	.021	.024	.071	1.1	6.60	14.40	C2	0008
5	130,000	7	.019	.021	.066	1.2	7.07	15.68	E2	1020
5	150,000	7	.017	.018	.056	1.3	7.70	16.42	F2	0009
5	150,000	7	.017	.018	.048	1.3	7.80	15.20	C3	1022
5	170,000	7	.015	.017	.046	1.4	8.30	16.98	D3	1023
5	200,000	7	.014	.015	.043	1.5	9.05	17.58	E3	1024
5	220,000	7	.012	.013	.040	1.6	9.60	18.20	E3	0010
10	4,700	15	.17	.22	1.1	.33	1.98	2.36	A0	0011
10	6,800	15	.12	.15	.88	.42	2.35	2.96	B0	0012
10	10,000	15	.08	.11	.60	.47	2.82	3.85	B0	0013
10	15,000	15	.052	.065	.33	.58	3.48	5.35	C0	0014
10	17,000	15	.046	.057	.29	.61	3.63	6.04	D0	1030
10	20,000	15	.041	.052	.28	.65	4.00	6.56	E0	1031
10	22,000	15	.037	.049	.27	.70	4.20	7.40	F0	0015
10	24,000	15	.034	.045	.25	.74	4.52	6.38	B1	1033
10	33,000	15	.032	.040	.16	.86	5.16	8.50	C1	0016
10	37,000	15	.029	.036	.16	.90	5.34	8.62	C1	1035
10	42,000	15	.026	.032	.15	.94	5.61	9.09	B2	1036
10	43,000	15	.025	.031	.15	.96	5.70	10.00	D1	1037
10	47,000	15	.022	.028	.15	1.0	6.00	9.85	D1	0017
10	55,000	15	.020	.025	.13	1.1	6.70	12.23	F1	1039
10	68,000	15	.019	.023	.11	1.2	7.20	14.40	C2	0018
10	75,000	15	.019	.023	.09	1.2	7.60	13.51	D2	1041
10	86,000	15	.018	.022	.08	1.3	8.30	14.08	E2	1042
10	96,000	15	.017	.021	.060	1.4	8.78	14.78	F2	1043
10	100,000	15	.017	.021	.055	1.5	9.00	16.40	C3	0019
10	120,000	15	.014	.017	.052	1.6	9.72	15.79	E3	1045
10	150,000	15	.012	.014	.049	1.8	10.80	17.60	E3	0020
15	3,300	20	.240	.320	1.35	.36	1.99	2.00	A0	0021
15	4,700	20	.154	.225	.93	.40	2.40	2.30	A0	0022
15	6,800	20	.120	.150	.71	.48	2.88	3.42	B0	0023
15	8,000	20	.108	.135	.58	.52	3.16	4.02	B0	1050
15	10,000	20	.080	.110	.43	.58	3.48	4.20	C0	0024
15	12,000	20	.070	.098	.38	.66	3.79	5.42	C0	1052
15	15,000	20	.052	.070	.27	.71	4.26	5.80	E0	0025
15	18,000	20	.050	.066	.25	.80	4.65	7.66	F0	1054
15	22,000	20	.048	.060	.23	.92	5.17	7.30	B1	0026
15	33,000	20	.032	.040	.15	1.10	6.30	8.40	C1	0027
15	40,000	20	.031	.036	.14	1.20	7.05	11.58	E1	1057
15	42,000	20	.030	.035	.13	1.23	7.27	9.74	B2	1058
15	45,000	20	.029	.033	.12	1.27	7.50	12.48	F1	1059

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CU71 capacitors - Continued.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance		Maximum impedance at -55°C and 120 Hz	DC leakage		Maximum AC ripple current	Case code	Dash number
			25°C	85°C		25°C	85°C	120 Hz @ 85°C		
Volts	µF	Volts	Ω		Ω	mA		Amps		
15	47,000	20	.028	.032	.11	1.30	7.80	12.50	C2	0028
15	51,000	20	.027	.032	.10	1.35	7.97	13.00	C2	1061
15	59,000	20	.027	.032	.095	1.46	8.30	14.18	D2	1062
15	68,000	20	.027	.031	.085	1.49	9.00	15.61	E2	1063
15	68,000	20	.027	.031	.072	1.50	9.00	16.00	C3	0029
15	76,000	20	.024	.030	.067	1.60	9.45	16.70	F2	1065
15	76,000	20	.024	.029	.067	1.61	9.47	16.91	C3	1066
15	89,000	20	.021	.025	.059	1.70	10.10	16.85	D3	1067
15	100,000	20	.017	.021	.051	1.80	10.80	17.50	E3	0030
15	110,000	20	.013	.017	.045	1.90	11.50	18.03	F3	1069
20	2,800	30	.120	.180	1.70	.43	2.58	2.10	A0	1070
20	5,100	30	.060	.89	1.22	.48	2.88	3.48	B0	1071
20	8,600	30	.040	.076	.490	.55	3.30	4.67	C0	1072
20	10,000	30	.034	.049	.430	.60	3.60	5.40	D0	1073
20	13,000	30	.027	.039	.350	.65	3.90	6.60	F0	1074
20	20,000	30	.020	.029	.24	.79	4.73	8.28	C1	1075
20	24,000	30	.018	.025	.210	.88	5.28	8.94	B2	1076
20	26,000	30	.015	.021	.190	.92	5.52	10.50	E1	1077
20	30,000	30	.014	.020	.170	1.02	6.12	11.32	F1	1078
20	37,000	30	.013	.018	.140	1.15	6.90	11.76	C2	1079
20	47,000	30	.010	.014	.110	1.36	8.16	14.70	E2	1080
20	54,000	30	.010	.014	.099	1.50	9.00	15.29	C3	1081
20	55,000	30	.010	.013	.097	1.52	9.12	15.41	F2	1082
20	63,000	30	.010	.013	.091	1.63	9.78	15.90	D3	1083
20	73,000	30	.010	.013	.069	1.77	10.62	16.50	E3	1084
20	82,000	30	.010	.013	.062	1.90	11.40	16.98	F3	1085
25	2,200	40	.240	.360	2.0	.35	2.10	2.10	A0	0031
25	3,300	40	.160	.240	1.5	.46	2.58	2.60	B0	0032
25	4,700	40	.110	.170	.99	.51	3.06	2.90	B0	0033
25	6,800	40	.080	.115	.58	.62	3.72	4.20	C0	0034
25	7,500	40	.074	.101	.55	.65	3.85	4.55	C0	1090
25	8,700	40	.065	.905	.50	.70	4.00	4.83	D0	1091
25	10,000	40	.052	.080	.44	.75	4.50	5.00	E0	0035
25	15,000	40	.044	.060	.27	.92	5.52	8.20	C1	0036
25	20,000	40	.040	.050	.22	1.01	6.29	9.06	D1	1094
25	20,000	40	.039	.050	.22	1.01	6.29	8.56	B2	1095
25	22,000	40	.036	.047	.19	1.1	6.60	11.00	C2	0037
25	23,000	40	.034	.045	.17	1.2	6.80	9.93	E1	1097
25	30,000	40	.029	.036	.14	1.3	8.20	11.03	C2	1098
25	33,000	40	.024	.032	.13	1.4	8.40	13.00	D2	0038
25	40,000	40	.023	.030	.10	1.5	9.10	14.43	E2	1100
25	45,000	40	.022	.026	.091	1.6	9.40	15.92	F2	1101
25	47,000	40	.022	.025	.083	1.6	9.60	16.00	C3	0039
25	52,000	40	.020	.023	.079	1.7	10.17	16.42	D3	1103
25	60,000	40	.017	.020	.072	1.85	10.74	17.05	E3	1104
25	68,000	40	.014	.017	.066	2.0	12.00	17.50	F3	0040
30	2,200	45	.150	.225	2.0	.39	2.34	2.08	A0	1106
30	4,400	45	.075	.115	1.32	.48	2.88	3.38	B0	1107
30	6,600	45	.050	.74	.61	.56	3.36	4.71	C0	1108
30	7,700	45	.043	.64	.53	.61	3.66	5.19	D0	1109
30	8,800	45	.038	.56	.49	.65	3.90	5.72	E0	1110
30	9,900	45	.034	.50	.45	.69	4.14	6.36	F0	1111
30	10,000	45	.038	.55	.44	.70	4.20	5.85	B1	1112
30	15,000	45	.026	.37	.27	.90	5.40	7.94	C1	1113
30	17,000	45	.022	.31	.25	.97	5.82	8.97	D1	1114
30	18,000	45	.023	.32	.24	1.01	6.06	8.52	B2	1115
30	22,000	45	.017	.24	.19	1.17	7.02	11.11	F1	1116
30	26,000	45	.016	.22	.16	1.27	7.62	11.42	C2	1117
30	30,000	45	.014	.019	.14	1.38	8.28	12.88	D2	1118

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CU71 capacitors - Continued.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance		Maximum impedance at -55°C and 120 Hz	DC leakage		Maximum AC ripple current 120 Hz @ 85°C	Case code	Dash number
			25°C	85°C		25°C	85°C			
Volts	uF	Volts	Ω		Ω	mA		Amps		
30	34,000	45	.012	.016	.13	1.48	8.88	14.50	E2	1119
30	38,000	45	.012	.016	.11	1.58	9.48	15.08	C3	1120
30	39,000	45	.011	.014	.10	1.61	9.66	15.91	F2	1121
30	45,000	45	.011	.014	.091	1.76	10.56	16.42	D3	1122
30	58,000	45	.010	.013	.075	2.10	12.60	18.40	F3	1123
40	1,800	55	.180	.270	3.51	.41	2.46	1.84	A0	1124
40	3,700	55	.090	.135	1.83	.43	2.58	3.04	B0	1125
40	5,500	55	.060	.089	.82	.60	3.60	4.23	C0	1126
40	6,400	55	.051	.076	.73	.64	3.84	4.75	D0	1127
40	7,400	55	.045	.067	.60	.69	4.14	5.34	E0	1128
40	8,200	55	.041	.061	.51	.72	4.32	5.88	F0	1129
40	9,000	55	.045	.066	.38	.78	4.78	5.39	B1	1130
40	13,000	55	.030	.044	.29	.98	5.88	7.28	C1	1131
40	15,000	55	.026	.037	.24	1.08	6.48	7.36	D1	1132
40	15,000	55	.027	.039	.24	1.08	6.48	7.86	B2	1133
40	18,000	55	.023	.032	.22	1.23	7.48	9.24	E1	1134
40	19,000	55	.020	.028	.21	1.27	7.62	10.38	F1	1135
40	22,000	55	.019	.026	.19	1.37	8.22	10.52	C2	1136
40	25,000	55	.016	.022	.15	1.48	8.88	12.02	D2	1137
40	28,000	55	.014	.019	.15	1.59	9.54	13.38	F2	1138
40	32,000	55	.014	.019	.14	1.73	10.38	14.05	C3	1139
40	33,000	55	.013	.018	.14	1.76	10.56	14.70	F2	1140
40	37,000	55	.013	.017	.14	1.91	11.46	15.14	D3	1141
40	43,000	55	.012	.016	.13	2.12	12.72	16.25	E3	1142
40	48,000	55	.011	.014	.12	2.30	13.80	17.62	F3	1143
50	1,000	75	.250	.330	3.80	.34	2.04	1.20	A0	0041
50	1,400	75	.206	.270	3.23	.40	2.36	1.54	A0	1145
50	2,200	75	.120	.150	2.10	.50	3.00	2.00	B0	0042
50	2,900	75	.095	.130	1.46	.57	3.38	3.18	B0	1147
50	3,300	75	.080	.100	1.10	.61	3.66	3.60	C0	0043
50	4,400	75	.065	.09	.89	.69	4.06	4.09	C0	1149
50	4,700	75	.056	.084	.77	.73	4.38	4.50	F0	0044
50	5,100	75	.053	.079	.73	.77	4.42	4.62	D0	1151
50	5,800	75	.048	.073	.65	.84	4.84	5.16	E0	1152
50	6,600	75	.042	.060	.57	.91	5.16	5.61	F0	1153
50	6,800	75	.040	.058	.55	.93	5.25	5.30	C1	0045
50	10,000	75	.034	.040	.33	1.10	6.60	5.80	C1	0046
50	11,000	75	.032	.037	.31	1.14	6.84	8.11	D1	1156
50	12,000	75	.029	.034	.29	1.18	7.08	7.77	B2	1157
50	13,000	75	.027	.031	.26	1.22	7.32	9.13	E1	1158
50	15,000	75	.022	.026	.22	1.30	7.80	9.85	F1	0047
50	15,000	75	.022	.026	.22	1.30	7.80	10.00	C2	1160
50	17,000	75	.021	.026	.20	1.39	8.32	10.61	C2	1161
50	20,000	75	.019	.025	.18	1.51	9.10	11.72	D2	1162
50	22,000	75	.018	.024	.16	1.60	9.60	12.83	E2	1163
50	22,000	75	.018	.024	.16	1.60	9.60	15.50	C3	0048
50	25,000	75	.017	.023	.14	1.74	10.13	14.54	F2	1165
50	30,000	75	.016	.022	.12	1.83	11.03	14.34	D3	1166
50	33,000	75	.012	.016	.10	2.10	11.56	16.00	E3	0049
50	39,000	75	.010	.013	.08	2.37	12.64	17.36	F3	1168
75	530	100	.270	.405	5.03	.29	1.74	1.38	A0	1169
75	1,000	100	.135	.202	3.10	.35	2.10	2.28	B0	1170
75	1,600	100	.091	.135	2.81	.44	2.64	3.12	C0	1171
75	1,800	100	.077	.115	2.57	.46	2.76	3.60	D0	1172
75	2,000	100	.068	.100	2.10	.49	2.94	3.96	E0	1173
75	2,400	100	.061	.088	1.53	.55	3.30	4.38	F0	1174
75	2,600	100	.065	.094	1.32	.59	3.54	4.14	B1	1175
75	3,900	100	.044	.063	.98	.75	4.50	5.68	C1	1176
75	4,400	100	.038	.054	.85	.82	4.92	6.12	B2	1177

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CU71 capacitors - Continued.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance		Maximum impedance at -55°C and 120 Hz	DC leakage		Maximum AC ripple current 120 Hz @ 85°C	Case code	Dash number
			25°C	85°C		25°C	85°C			
Volts	µF	Volts	Ω		Ω	mA		Amps		
75	4,500	100	.037	.052	.82	.83	4.98	6.42	D1	1178
75	5,000	100	.033	.046	.74	.90	5.40	7.08	E1	1179
75	5,800	100	.029	.040	.63	.95	5.70	7.86	F1	1180
75	6,600	100	.028	.037	.52	1.01	6.06	8.04	C2	1181
75	7,700	100	.024	.033	.47	1.08	6.48	9.12	D2	1182
75	8,800	100	.021	.029	.41	1.15	6.90	10.15	E2	1183
75	9,500	100	.020	.027	.32	1.20	7.20	11.40	C3	1184
75	9,900	100	.019	.025	.31	1.23	7.38	11.18	F2	1185
75	11,000	100	.019	.025	.29	1.30	7.80	11.53	D3	1186
75	13,000	100	.017	.022	.24	1.43	8.58	12.68	E3	1187
75	14,000	100	.015	.020	.22	1.50	9.00	13.88	F3	1188
100	250	150	.620	.950	13.10	.20	1.21	.81	A0	1189
100	330	150	.480	.720	9.90	.27	1.62	.88	A0	0050
100	470	150	.320	.510	5.90	.33	1.98	1.33	B0	0051
100	680	150	.235	.345	4.40	.39	2.34	1.40	B0	0052
100	800	150	.220	.300	3.76	.42	2.52	1.79	C0	1193
100	900	150	.180	.270	3.20	.44	2.65	2.08	D0	1194
100	1,000	150	.160	.240	2.70	.47	2.82	2.28	E0	0053
100	1,200	150	.140	.200	2.35	.52	3.17	2.45	B1	1196
100	1,500	150	.110	.160	1.90	.58	3.48	3.00	B1	0054
100	1,800	150	.095	.143	1.63	.62	3.77	3.32	C1	1198
100	2,100	150	.075	.126	1.36	.67	4.06	3.58	D1	1199
100	2,200	150	.072	.110	1.30	.70	4.20	4.20	B2	0055
100	2,600	150	.066	.100	1.18	.74	4.46	4.59	F1	1201
100	3,300	150	.048	.072	.88	.86	5.16	5.60	C2	0056
100	4,100	150	.044	.060	.72	.93	5.60	5.92	E2	1203
100	4,500	150	.043	.056	.67	.95	5.72	7.16	F2	1204
100	4,700	150	.042	.054	.63	1.00	6.00	7.50	C3	0057
100	5,500	150	.035	.046	.52	1.12	6.70	7.96	D3	1206
100	6,800	150	.030	.039	.44	1.20	7.20	9.60	E3	0058
150	220	200	.700	1.000	13.20	.27	1.60	.80	A0	0059
150	330	200	.480	.680	9.00	.36	2.00	.98	A0	0060
150	470	200	.340	.480	6.20	.42	2.39	1.46	B0	0061
150	680	200	.230	.310	4.40	.47	2.82	1.88	D0	0062
150	1,000	200	.200	.225	2.90	.58	3.48	2.68	B1	0063
150	1,500	200	.130	.150	1.80	.71	4.26	3.12	C1	0064
150	2,200	200	.090	.100	1.35	.86	5.16	5.10	C2	0065
150	3,300	200	.060	.070	.90	1.10	6.30	6.80	C3	0066
150	4,700	200	.042	.056	.62	1.34	7.60	8.90	F3	0067
200	150	250	1.000	1.500	18.30	.26	1.56	.66	A0	0068
200	220	250	.700	1.000	12.80	.31	1.86	1.00	B0	0069
200	330	250	.480	.680	8.30	.39	2.34	1.50	A1	0070
200	470	250	.320	.480	5.80	.46	2.76	1.54	C0	0071
200	680	250	.230	.320	4.00	.55	3.30	1.97	E0	0072
200	1,000	250	.200	.230	2.70	.72	4.02	2.74	C1	0073
200	1,500	250	.130	.150	1.70	.82	4.92	3.20	E1	0074
200	2,200	250	.090	.100	1.35	1.00	6.00	5.40	D2	0075
200	3,300	250	.060	.070	.90	1.20	7.20	7.00	D3	0076
200	4,100	250	.048	.065	.72	1.36	8.20	8.70	F3	0077
250	100	300	1.300	2.000	27.50	.24	1.44	.60	A0	0078
250	220	300	.600	.900	12.50	.35	2.10	1.10	A1	0079
250	330	300	.400	.600	8.30	.43	2.58	1.40	C0	0080
250	470	300	.420	.450	5.80	.51	3.06	1.90	B1	0081
250	680	300	.300	.310	4.00	.62	3.72	2.50	C1	0082
250	1,000	300	.200	.210	2.70	.75	4.50	3.00	D1	0083
250	1,500	300	.130	.140	1.70	.92	5.52	3.70	C2	0084
250	2,200	300	.090	.110	1.20	1.10	6.60	5.20	C3	0085
250	3,300	300	.060	.075	.83	1.45	8.17	7.70	F3	0086

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Style CU71 capacitors - Continued.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance		Maximum impedance at -55°C and 120 Hz	DC leakage		Maximum AC ripple current 120 Hz @ 85°C	Case code	Dash number
			25°C	85°C		25°C	85°C			
Volts	µF	Volts	Ω		Ω	mA		Amps		
300	100	350	1.300	1.850	27.50	.26	1.56	.60	A0	0087
300	150	350	.900	1.250	18.30	.32	1.92	.90	B0	0088
300	220	350	.600	.850	12.50	.41	2.32	1.10	C0	0089
300	330	350	.480	.560	8.30	.50	2.83	1.40	B1	0090
300	470	350	.340	.400	5.80	.60	3.38	2.00	C1	0091
300	680	350	.250	.270	4.00	.68	4.08	2.60	B2	0092
300	1,000	350	.170	.190	2.70	.82	4.92	3.50	C2	0093
300	1,500	350	.130	.130	1.70	1.00	6.00	4.20	C3	0094
300	2,200	350	.090	.100	1.70	1.22	7.28	5.80	E3	0095
350	68	400	2.300	2.700	40.70	.23	1.38	.50	A0	0096
350	150	400	1.100	1.250	18.30	.34	2.04	.97	A1	0097
350	220	400	.700	.800	12.80	.42	2.52	1.10	C0	0098
350	330	400	.480	.560	8.30	.54	3.06	1.40	C0	0099
350	470	400	.340	.400	5.80	.61	3.66	2.10	C1	0100
350	680	400	.230	.270	4.00	.78	4.39	3.30	C2	0101
350	1,000	400	.160	.180	2.70	.89	5.34	4.00	E2	0102
350	1,500	400	.130	.140	1.70	1.08	6.48	5.00	D3	0103
350	1,800	400	.110	.120	1.50	1.19	7.13	5.70	E3	0104
350	2,200	400	.090	.100	1.20	1.40	7.90	6.70	F3	0105

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Type - Tubular.
Material - Metal.
Terminals - See figure.

DC rated voltage: See table I.

Capacitance value: See table I.

Capacitance tolerance: -10 +50 percent.

Operating temperature:
-55°C to +85°C.

DC leakage: See table I.

Equivalent series resistance: See table I.

Low temperature exposure:
DCL - See table I.
ΔC - See table I.
DF - See table I.

Solderability: Not applicable.

Terminal strength:
Method 211 of MIL-STD-202,
test conditions A and E.

Stability at reduced and high temperature:
Step 1 (at +25°C):
DCL - See table I.
ΔC - See table I.
DF - See table I.

Step 2 (at -55°C):
Impedance - See table I.
ΔC - Within the following percentages of the step 1 value:
5 WVDC: 35 percent.
10 to 25 WVDC inclusive: 25 percent.
50 to 350 WVDC inclusive: 20 percent.

Step 3 (at +25°C):
DCL - See table I.
ΔC - Within 5 percent of step 1 value.
DF - See table I.

Step 4 (at +85°C):
DCL - See table I.
ΔC - Within 30 percent of step 1 value.
DF - See table I.

Step 5 (at +25°C):
DCL - See table I.
ΔC - Within 5 percent of step 1 value.
DF - See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

Life: Method 108 of MIL-STD-202.
For qualification: Condition F (2,000 hours) at +85°C.
DCL - See table I.
ΔC - Within 10 percent of initial measured value.
DF - Not more than 130 percent of initial requirement.
For quality conformance:
Performance check, condition B (250 hours) at 85°C.
DCL - See table I.
ΔC - Within 10 percent of initial measured value.
DF - See table I.
For quality conformance:
Continuation test (1,750 hours) at 85°C.
DCL - See table I.
ΔC - Within 15 percent of initial measured value.
DF - Not more than 130 percent of initial requirement.

Shock (specified pulse):
Method 213 of MIL-STD-202, condition H.

Vibration:
Low frequency - Method 201, MIL-STD-202.

Thermal shock and immersion:
Thermal shock: Method 107 of MIL-STD-202, condition A (2 cycles, 30 minutes).
Immersion: Method 104 of MIL-STD-202, condition B (2 cycles, 30 minutes).
DCL - See table I.
ΔC - Within 5 percent of initial measured value.
DF - See table I.
Insulation resistance of sleeve - Not less than 100 megohms.

Resistance to solvents: Not applicable.

Surge voltage:
DCL - See table I.
ΔC - Within 6 percent of initial measured value.
DF - See table I.

Vent test: In accordance with MIL-C-39018.

Moisture resistance:
Method 106 of MIL-STD-202.
DCL - See table I.
ΔC - Within 6 percent of initial measured value.
DF - See table I.
Insulation resistance of insulating sleeve - Not less than 100 megohms.

High temperature exposure: (500 hours at 85°C)
DCL - Not more than 200 percent of initial requirement.
ΔC - Within 10 percent of initial measured value.
DF - Not more than 115 percent of initial requirement.

Reverse voltage: Not applicable.

Marking:
In accordance with MIL-C-39018.

Part number:
M39018/04- (Dash number from table I).

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-F235)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977 703-020/2876

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.