NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-39018/4B
23 March 1978
SUPERSEDING
MIL-C-0039018/4A(USAF)
31 December 1973, and
MIL-C-39018/4
23 March 1972

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (ALUMINUM OXIDE)
(POLARIZED), NON-ESTABLISHED RELIABILITY, AND ESTABLISHED RELIABILITY
STYLES CU71 (INSULATED) AND CUR71 (INSULATED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors herein shall consist of this document and the latest issue of Specification MIL-C-39018

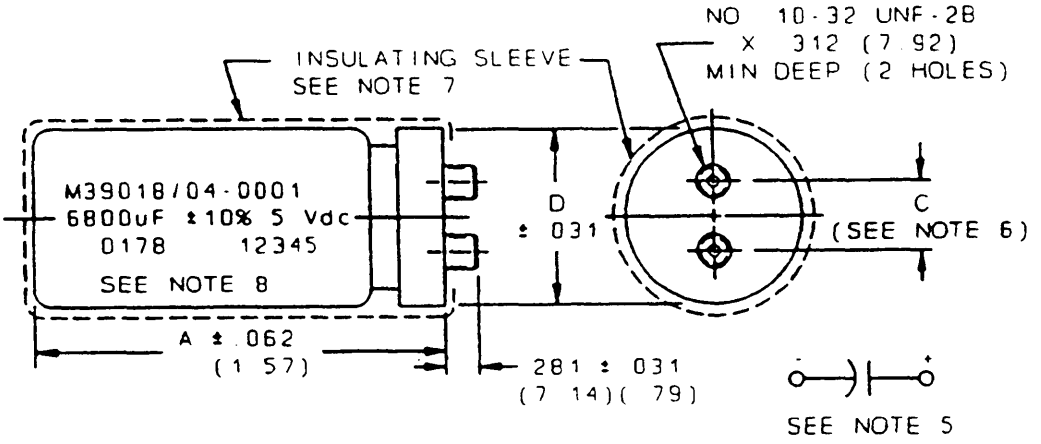

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Capacitors are mounted by means of a wraparound, footed-type bracket.
5. There is an indeterminate resistance between the metal case and the negative terminal.
6. "C" dimension is .500 (12.70 mm) ±.016 (.41 mm) for case diameter of 1.375 (34.92 mm); .875 (22.22 mm) ±.016 (.41 mm) for case diameter of 2.00 (50.8 mm); 1.125 (28.58 mm) ±.016 (.41 mm) for case diameter of 2.50 (63.5 mm); and 1.250 (31.75 mm) ±.016 (.41 mm) for case diameter of 3.0 (76.2 mm).
7. Insulating sleeve thickness shall not exceed .016 (.41 mm) and shall overlap the ends of the capacitor body.
8. Example of marking and its relative location on the capacitor body.

FIGURE 1. Styles CU71 and CUR71 insulated capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

Case size	Dimensions		Case size	Dimensions	
	L ±.062 (1.57) Nominal	D ±.031 (.79) Nominal		L ±.062 (1.57) Nominal	D ±.031 (.79) Nominal
A0	2.125 (53.98)	1.375 (34.92)	F1	5.625 (142.88)	2.000 (50.80)
B0	3.125 (79.38)	1.375 (34.92)	B2	3.125 (79.38)	2.500 (63.50)
C0	4.125 (104.78)	1.375 (34.92)	C2	4.125 (104.78)	2.500 (63.50)
D0	4.625 (117.48)	1.375 (34.92)	D2	4.625 (117.48)	2.500 (63.50)
E0	5.125 (130.18)	1.375 (34.92)	E2	5.125 (130.18)	2.500 (63.50)
F0	5.625 (142.88)	1.375 (34.92)	F2	5.625 (142.88)	2.500 (63.50)
A1	2.125 (53.98)	2.000 (50.80)	C3	4.125 (104.78)	3.000 (76.20)
B1	3.125 (79.38)	2.000 (50.80)	D3	4.625 (117.48)	3.000 (76.20)
C1	4.125 (104.78)	2.000 (50.80)	E3	5.125 (130.18)	3.000 (76.20)
D1	4.625 (117.48)	2.000 (50.80)	F3	5.625 (142.88)	3.000 (76.20)
E1	5.125 (130.18)	2.000 (50.80)			

FIGURE 1. Styles CU71 and CUR71 insulated capacitors. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CU71 and CUR71 capacitors.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance		Maximum impedance at -55°C & 120 Hz	DC leakage		Maximum AC ripple current 1/ 120 Hz @ 85°C	Case size	CU71 Dash number	CUR71 Dash number 2/
			25°C	85°C		25°C	85°C				
Volts	µF	Volts	Ω		Ω	mA		Amps			
5	6,800	7	.15	.19	1.2	.28	1.68	2.50	A0	0001	2001-
5	8,000	7	.13	.17	1.00	.30	1.85	2.68	A0	1002	2002-
5	10,000	7	.10	.13	.88	.34	2.04	2.85	A0	0002	2003-
5	15,000	7	.07	.08	.55	.41	2.46	4.24	B0	0003	2004-
5	17,000	7	.06	.07	.48	.45	2.63	4.54	B0	1005	2005-
5	22,000	7	.05	.06	.33	.50	3.00	5.84	C0	0004	2006-
5	25,000	7	.045	.06	.30	.53	3.18	6.14	C0	1007	2007-
5	29,000	7	.039	.05	.28	.57	3.43	6.98	D0	1008	2008-
5	33,000	7	.032	.040	.25	.61	3.66	8.30	F0	0005	2009-
5	34,000	7	.032	.040	.24	.62	3.71	7.81	E0	1010	2010-
5	37,000	7	.032	.040	.21	.65	3.86	8.14	F0	1011	2011-
5	40,000	7	.033	.040	.18	.67	4.02	7.62	B1	1012	2012-
5	47,000	7	.034	.040	.15	.73	4.38	9.40	C1	0006	2013-
5	60,000	7	.031	.033	.13	.82	4.61	10.23	C1	1014	2014-
5	67,000	7	.028	.030	.12	.87	4.95	10.88	B2	1015	2015-
5	68,000	7	.023	.027	.11	.88	5.28	10.30	D1	0007	2016-
5	80,000	7	.022	.025	.095	.95	6.04	13.11	E1	1017	2017-
5	90,000	7	.021	.024	.082	.99	6.32	14.37	F1	1018	2018-
5	100,000	7	.021	.024	.071	1.1	6.60	14.40	C2	0008	2019-
5	130,000	7	.019	.021	.066	1.2	7.07	15.68	E2	1020	2020-
5	150,000	7	.017	.018	.056	1.3	7.70	16.42	F2	0009	2021-
5	150,000	7	.017	.018	.048	1.3	7.80	15.20	C3	1022	2022-
5	170,000	7	.015	.017	.046	1.4	8.30	16.98	D3	1023	2023-
5	200,000	7	.014	.015	.043	1.5	9.05	17.58	E3	1024	2024-
5	220,000	7	.012	.013	.040	1.6	9.60	18.20	E3	0010	2025-
10	4,700	15	.17	.22	1.1	.33	1.98	2.36	A0	0011	2026-
10	6,800	15	.12	.15	.88	.42	2.35	2.96	B0	0012	2027-
10	10,000	15	.08	.11	.60	.47	2.82	3.85	B0	0013	2028-
10	15,000	15	.052	.065	.33	.58	3.48	5.35	C0	0014	2029-
10	17,000	15	.046	.057	.29	.61	3.63	6.04	D0	1030	2030-
10	20,000	15	.041	.052	.28	.65	4.00	6.56	E0	1031	2031-
10	22,000	15	.037	.049	.27	.70	4.20	7.40	F0	0015	2032-
10	24,000	15	.034	.045	.25	.74	4.52	6.38	B1	1033	2033-
10	33,000	15	.032	.040	.16	.86	5.16	8.50	C1	0016	2034-
10	37,000	15	.029	.036	.16	.90	5.34	8.62	C1	1035	2035-
10	42,000	15	.026	.032	.15	.94	5.61	9.09	B2	1036	2036-
10	43,000	15	.025	.031	.15	.96	5.70	10.00	D1	1037	2037-
10	47,000	15	.022	.028	.15	1.0	6.00	9.85	D1	0017	2038-
10	55,000	15	.020	.025	.13	1.1	6.70	12.23	F1	1039	2039-
10	68,000	15	.019	.023	.11	1.2	7.20	14.40	C2	0018	2040-
10	75,000	15	.019	.023	.09	1.2	7.60	13.51	D2	1041	2041-
10	86,000	15	.018	.022	.08	1.3	8.30	14.08	E2	1042	2042-
10	96,000	15	.017	.021	.060	1.4	8.78	14.78	F2	1043	2043-
10	100,000	15	.017	.021	.055	1.5	9.00	16.40	C3	0019	2044-
10	120,000	15	.014	.017	.052	1.6	9.72	15.79	E3	1045	2045-
10	150,000	15	.012	.014	.049	1.8	10.80	17.60	E3	0020	2046-
15	3,300	20	.240	.320	1.35	.36	1.99	2.00	A0	0021	2047-
15	4,700	20	.154	.225	.93	.40	2.40	2.30	A0	0022	2048-
15	6,800	20	.120	.150	.71	.48	2.88	3.42	B0	0023	2049-
15	8,000	20	.108	.135	.58	.52	3.16	4.02	B0	1050	2050-
15	10,000	20	.080	.110	.43	.58	3.48	4.20	C0	0024	2051-
15	12,000	20	.070	.098	.38	.66	3.79	5.42	C0	1052	2052-
15	15,000	20	.052	.070	.27	.71	4.26	5.80	E0	0025	2053-
15	18,000	20	.050	.066	.25	.80	4.65	7.66	F0	1054	2054-
15	22,000	20	.048	.060	.23	.92	5.17	7.30	B1	0026	2055-
15	33,000	20	.032	.040	.15	1.10	6.30	8.40	C1	0027	2056-
15	40,000	20	.031	.036	.14	1.20	7.05	11.58	E1	1057	2057-
15	42,000	20	.030	.035	.13	1.23	7.27	9.74	B2	1058	2058-
15	45,000	20	.029	.033	.12	1.27	7.50	12.48	F1	1059	2059-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CU71 and CUR71 capacitors - Continued.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance 25°C	Equivalent series resistance 85°C	Maximum impedance at -55°C & 120 Hz	DC leakage 25°C	DC leakage 85°C	Maximum AC ripple current 120 Hz @ 85°C 1/	Case size	CU71 Dash number	CUR71 Dash number 2/
Volts	µF	Volts	Ω		Ω	mA		Amps			
15	47,000	20	.028	.032	.11	1.30	7.80	12.50	C2	0028	2060-
15	51,000	20	.027	.032	.10	1.35	7.97	13.00	C2	1061	2061-
15	59,000	20	.027	.032	.095	1.46	8.30	14.18	D2	1062	2062-
15	68,000	20	.027	.031	.085	1.46	9.00	15.61	E2	1063	2063-
15	68,000	20	.027	.031	.072	1.50	9.00	16.00	C3	0029	2064-
15	76,000	20	.024	.030	.067	1.60	9.45	16.70	F2	1065	2065-
15	76,000	20	.024	.029	.067	1.61	9.47	16.91	C3	1066	2066-
15	89,000	20	.021	.025	.059	1.70	10.10	16.85	D3	1067	2067-
15	100,000	20	.017	.021	.051	1.80	10.80	17.50	E3	0030	2068-
15	110,000	20	.013	.017	.045	1.90	11.50	18.03	F3	1069	2069-
20	2,800	30	.120	.180	1.70	.43	2.58	2.10	A0	1070	2070-
20	5,100	30	.060	.89	1.22	.48	2.88	3.48	B0	1071	2071-
20	8,600	30	.040	.076	.490	.55	3.30	4.67	C0	1072	2072-
20	10,000	30	.034	.049	.430	.60	3.60	5.40	D0	1073	2073-
20	13,000	30	.027	.039	.350	.65	3.90	6.60	F0	1074	2074-
20	20,000	30	.020	.029	.24	.79	4.73	8.28	C1	1075	2075-
20	24,000	30	.018	.025	.210	.88	5.28	8.94	B2	1076	2076-
20	26,000	30	.015	.021	.190	.92	5.52	10.50	E1	1077	2077-
20	30,000	30	.014	.020	.170	1.02	6.12	11.32	F1	1078	2078-
20	37,000	30	.013	.018	.140	1.15	6.90	11.76	C2	1079	2079-
20	47,000	30	.010	.014	.110	1.36	8.16	14.70	E2	1080	2080-
20	54,000	30	.010	.014	.099	1.50	9.00	15.29	C3	1081	2081-
20	55,000	30	.010	.013	.097	1.52	9.12	15.41	F2	1082	2082-
20	63,000	30	.010	.013	.091	1.63	9.78	15.90	D3	1083	2083-
20	73,000	30	.010	.013	.069	1.77	10.62	16.50	E3	1084	2084-
20	82,000	30	.010	.013	.062	1.90	11.40	16.98	F3	1085	2085-
25	2,200	40	.240	.360	2.0	.35	2.10	2.10	A0	0031	2086-
25	3,300	40	.160	.240	1.5	.46	2.58	2.60	B0	0032	2087-
25	4,700	40	.110	.170	.99	.51	3.06	2.90	B0	0033	2088-
25	6,800	40	.080	.115	.58	.62	3.72	4.20	C0	0034	2089-
25	7,500	40	.074	.101	.55	.65	3.85	4.55	C0	1090	2090-
25	8,700	40	.065	.095	.50	.70	4.00	4.83	D0	1091	2091-
25	10,000	40	.052	.080	.44	.75	4.50	5.00	E0	0035	2092-
25	15,000	40	.044	.060	.27	.92	5.52	8.20	C1	0036	2093-
25	20,000	40	.040	.050	.22	1.01	6.29	9.06	D1	1094	2094-
25	20,000	40	.039	.050	.22	1.01	6.29	8.56	B2	1095	2095-
25	22,000	40	.036	.047	.19	1.1	6.60	11.00	C2	0037	2096-
25	23,000	40	.034	.045	.17	1.2	6.80	9.93	E1	1097	2097-
25	30,000	40	.029	.036	.14	1.3	8.20	11.03	C2	1098	2098-
25	33,000	40	.024	.032	.13	1.4	8.40	13.00	D2	0038	2099-
25	40,000	40	.023	.030	.10	1.5	9.10	14.43	E2	1100	2100-
25	45,000	40	.022	.026	.091	1.6	9.40	15.92	F2	1101	2101-
25	47,000	40	.022	.025	.083	1.6	9.60	16.00	C3	0039	2102-
25	52,000	40	.020	.023	.079	1.7	10.17	16.42	D3	1103	2103-
25	60,000	40	.017	.020	.072	1.85	10.74	17.05	E3	1104	2104-
25	68,000	40	.014	.017	.066	2.0	12.00	17.50	F3	0040	2105-
30	2,200	45	.150	.225	2.0	.39	2.34	2.08	A0	1106	2106-
30	4,400	45	.075	.115	1.32	.48	2.88	3.38	B0	1107	2107-
30	6,600	45	.050	.74	.61	.56	3.36	4.71	C0	1108	2108-
30	7,700	45	.043	.64	.53	.61	3.66	5.19	D0	1109	2109-
30	8,800	45	.038	.56	.49	.65	3.90	5.72	E0	1110	2110-
30	9,900	45	.034	.50	.45	.69	4.14	6.36	F0	1111	2111-
30	10,000	45	.038	.55	.44	.70	4.20	5.85	B1	1112	2112-
30	15,000	45	.026	.37	.27	.90	5.40	7.94	C1	1113	2113-
30	17,000	45	.022	.31	.25	.97	5.82	8.97	D1	1114	2114-
30	18,000	45	.023	.32	.24	1.01	6.06	8.52	B2	1115	2115-
30	22,000	45	.017	.24	.19	1.17	7.02	11.11	F1	1116	2116-
30	26,000	45	.016	.22	.16	1.27	7.62	11.42	C2	1117	2117-
30	30,000	45	.014	.019	.14	1.38	8.28	12.88	D2	1118	2118-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CU71 and CUR71 capacitors - Continued.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance		Maximum impedance at -55°C & 120 Hz	DC leakage		Maximum AC ripple current 1/ 120 Hz @ 85°C	Case size	CU71 Dash number	CUR71 Dash number 2/
			25°C	85°C		25°C	85°C				
Volts	µF	Volts	Ω		Ω	mA		Amps			
30	34,000	45	.012	.016	.13	1.48	8.88	14.50	E2	1119	2119-
30	38,000	45	.012	.016	.11	1.58	9.48	15.08	C3	1120	2120-
30	39,000	45	.011	.014	.10	1.61	9.66	15.91	F2	1121	2121-
30	45,000	45	.011	.014	.091	1.76	10.56	16.42	D3	1122	2122-
30	58,000	45	.010	.013	.075	2.10	12.60	18.40	F3	1123	2123-
40	1,800	55	.180	.270	3.51	.41	2.46	1.84	A0	1124	2124-
40	3,700	55	.090	.135	1.83	.43	2.58	3.04	B0	1125	2125-
40	5,500	55	.060	.089	.82	.60	3.60	4.23	C0	1126	2126-
40	6,400	55	.051	.076	.73	.64	3.84	4.75	D0	1127	2127-
40	7,400	55	.045	.067	.60	.69	4.14	5.34	E0	1128	2128-
40	8,200	55	.041	.061	.51	.72	4.32	5.88	F0	1129	2129-
40	9,000	55	.045	.066	.38	.78	4.78	5.39	B1	1130	2130-
40	13,000	55	.030	.044	.29	.98	5.88	7.28	C1	1131	2131-
40	15,000	55	.026	.037	.24	1.08	6.48	7.36	D1	1132	2132-
40	15,000	55	.027	.039	.24	1.08	6.48	7.86	B2	1133	2133-
40	18,000	55	.023	.032	.22	1.23	7.48	9.24	E1	1134	2134-
40	19,000	55	.020	.028	.21	1.27	7.62	10.38	F1	1135	2135-
40	22,000	55	.019	.026	.19	1.37	8.22	10.52	C2	1136	2136-
40	25,000	55	.016	.022	.15	1.48	8.88	12.02	D2	1137	2137-
40	28,000	55	.014	.019	.15	1.59	9.54	13.38	F2	1138	2138-
40	32,000	55	.014	.019	.14	1.73	10.38	14.05	C3	1139	2139-
40	33,000	55	.013	.018	.14	1.76	10.56	14.70	F2	1140	2140-
40	37,000	55	.013	.017	.14	1.91	11.46	15.14	D3	1141	2141-
40	43,000	55	.012	.016	.13	2.12	12.72	16.25	E3	1142	2142-
40	48,000	55	.011	.014	.12	2.30	13.80	17.62	F3	1143	2143-
50	1,000	75	.250	.330	3.80	.34	2.04	1.20	A0	0041	2144-
50	1,400	75	.206	.270	3.23	.40	2.36	1.54	A0	1145	2145-
50	2,200	75	.120	.150	2.10	.50	3.00	2.00	B0	0042	2146-
50	2,900	75	.095	.130	1.46	.57	3.38	3.18	B0	1147	2147-
50	3,300	75	.080	.100	1.10	.61	3.66	3.60	C0	0043	2148-
50	4,400	75	.065	.09	.89	.69	4.06	4.09	C0	1149	2149-
50	4,700	75	.056	.084	.77	.73	4.38	4.50	F0	0044	2150-
50	5,100	75	.053	.079	.73	.77	4.42	4.62	D0	1151	2151-
50	5,800	75	.048	.073	.65	.84	4.84	5.16	E0	1152	2152-
50	6,600	75	.042	.060	.57	.91	5.16	5.61	F0	1153	2153-
50	6,600	75	.040	.058	.55	.93	5.25	8.50	B1	1300	2154-
50	6,600	75	.040	.058	.55	.93	5.25	8.50	F0	1301	2155-
50	6,800	75	.040	.058	.55	.93	5.25	5.30	C1	0045	2156-
50	10,000	75	.034	.040	.33	1.10	6.60	5.80	C1	0046	2157-
50	11,000	75	.032	.037	.31	1.14	6.84	8.11	D1	1156	2158-
50	12,000	75	.029	.034	.29	1.18	7.08	7.77	B2	1157	2159-
50	13,000	75	.027	.031	.26	1.22	7.32	9.13	E1	1158	2160-
50	15,000	75	.022	.026	.22	1.30	7.80	9.85	F1	1160	2161-
50	15,000	75	.022	.026	.22	1.30	7.80	10.00	C2	0047	2162-
50	17,000	75	.021	.026	.20	1.39	8.32	10.61	C2	1161	2163-
50	20,000	75	.019	.025	.18	1.51	9.10	11.72	D2	1162	2164-
50	22,000	75	.018	.024	.16	1.60	9.60	12.83	E2	1163	2165-
50	22,000	75	.018	.024	.16	1.60	9.60	15.50	C3	0048	2166-
50	25,000	75	.017	.023	.14	1.74	10.13	14.54	F2	1165	2167-
50	30,000	75	.016	.022	.12	1.83	11.03	14.34	D3	1166	2168-
50	33,000	75	.012	.016	.10	2.10	11.56	16.00	E3	0049	2169-
50	39,000	75	.010	.013	.08	2.37	12.64	17.36	F3	1168	2170-
75	530	100	.270	.405	5.03	.29	1.74	1.38	A0	1169	2171-
75	1,000	100	.135	.202	3.10	.35	2.10	2.28	B0	1170	2172-
75	1,600	100	.091	.135	2.81	.44	2.64	3.12	C0	1171	2173-
75	1,800	100	.077	.115	2.57	.46	2.76	3.60	D0	1172	2174-
75	2,000	100	.068	.100	2.10	.49	2.94	3.96	E0	1173	2175-
75	2,400	100	.061	.088	1.53	.55	3.30	4.38	F0	1174	2176-
75	2,600	100	.065	.094	1.32	.59	3.54	4.14	B1	1175	2177-
75	3,900	100	.044	.063	.98	.75	4.50	5.68	C1	1176	2178-
75	4,400	100	.038	.054	.85	.82	4.92	6.12	B2	1177	2179-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CU71 and CUR71 capacitors - Continued.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance		Maximum impedance @ -55°C & 120 Hz	DC leakage		Maximum AC ripple current 1/ 120 Hz @ 85°C	Case size	CU71 Dash number	CUR71 Dash number 2/
			25°C	85°C		25°C	85°C				
Volts	µF	Volts	Ω		Ω	mA		Amps			
75	4,500	100	.037	.052	.82	.83	4.98	6.42	D1	1178	2180-
75	5,000	100	.033	.046	.74	.90	5.40	7.08	E1	1179	2181-
75	5,800	100	.029	.040	.63	.95	5.70	7.86	F1	1180	2182-
75	6,600	100	.028	.037	.52	1.01	6.06	8.04	C2	1181	2183-
75	7,700	100	.024	.033	.47	1.08	6.48	9.12	D2	1182	2184-
75	8,800	100	.021	.029	.41	1.15	6.90	10.15	E2	1183	2185-
75	9,500	100	.020	.027	.32	1.20	7.20	11.40	C3	1184	2186-
75	9,900	100	.019	.025	.31	1.23	7.39	11.19	F2	1185	2187-
75	11,000	100	.019	.025	.29	1.30	7.80	11.53	D3	1186	2188-
75	13,000	100	.017	.022	.24	1.45	8.58	12.68	E3	1187	2189-
75	14,000	100	.015	.020	.22	1.50	9.00	13.88	F3	1188	2190-
100	250	150	.620	.950	13.10	.20	1.21	.81	A0	1189	2191-
100	330	150	.480	.720	9.90	.27	1.62	.88	A0	0050	2192-
100	470	150	.320	.510	5.90	.33	1.98	1.33	B0	0051	2193-
100	680	150	.235	.345	4.40	.39	2.34	1.40	B0	0052	2194-
100	800	150	.220	.300	3.76	.42	2.52	1.79	C0	1193	2195-
100	900	150	.180	.270	3.20	.44	2.65	2.08	D0	1194	2196-
100	1,000	150	.160	.240	2.70	.47	2.82	2.28	E0	0053	2197-
100	1,200	150	.140	.200	2.35	.52	3.17	2.45	B1	1196	2198-
100	1,500	150	.110	.160	1.90	.58	3.48	3.00	B1	0054	2199-
100	1,800	150	.095	.143	1.63	.62	3.77	3.32	C1	1198	2200-
100	2,100	150	.075	.126	1.36	.67	4.06	3.58	D1	1199	2201-
100	2,200	150	.072	.110	1.30	.70	4.20	4.20	B2	0055	2202-
100	2,600	150	.066	.100	1.18	.74	4.46	4.59	F1	1201	2203-
100	3,300	150	.048	.072	.88	.86	5.16	5.60	C2	0056	2204-
100	4,100	150	.044	.060	.72	.93	5.60	5.92	E2	1202	2205-
100	4,500	150	.043	.056	.67	.95	5.72	7.16	F2	1204	2206-
100	4,700	150	.042	.054	.63	1.00	6.00	7.50	C3	0057	2207-
100	5,500	150	.035	.046	.52	1.12	6.70	7.96	D3	1206	2208-
100	6,800	150	.030	.039	.44	1.20	7.20	9.60	E3	0058	2209-
150	220	200	.700	1.000	13.20	.27	1.60	.80	A0	0059	2210-
150	330	200	.480	.680	9.00	.36	2.00	.98	A0	0060	2211-
150	470	200	.340	.480	6.20	.42	2.39	1.46	B0	0061	2212-
150	680	200	.230	.310	4.40	.47	2.82	1.88	D0	0062	2213-
150	1,000	200	.200	.225	2.90	.58	3.48	2.68	B1	0063	2214-
150	1,500	200	.130	.150	1.80	.71	4.26	3.12	C1	0064	2215-
150	2,200	200	.090	.100	1.35	.86	5.16	5.10	C2	0065	2216-
150	3,300	200	.060	.070	.90	1.10	6.30	6.80	C3	0066	2217-
150	4,700	200	.042	.056	.62	1.34	7.60	8.90	F3	0067	2218-
200	150	250	1.000	1.500	18.30	.26	1.56	.66	A0	0068	2219-
200	220	250	.700	1.000	12.80	.31	1.86	1.00	B0	0069	2220-
200	330	250	.480	.680	8.30	.39	2.34	1.50	A1	0070	2221-
200	470	250	.320	.480	5.80	.46	2.76	1.54	C0	0071	2222-
200	680	250	.230	.320	4.00	.55	3.30	1.97	E0	0072	2223-
200	1,000	250	.200	.230	2.70	.72	4.02	2.74	C1	0073	2224-
200	1,500	250	.130	.150	1.70	.82	4.92	3.20	E1	0074	2225-
200	2,200	250	.090	.100	1.35	1.00	6.00	5.40	D2	0075	2226-
200	3,300	250	.060	.070	.90	1.20	7.20	7.00	D3	0076	2227-
200	4,100	250	.048	.065	.72	1.36	8.20	8.70	F3	0077	2228-
250	100	300	1.300	2.000	27.50	.24	1.44	.60	A0	0078	2229-
250	220	300	.600	.900	12.50	.35	2.10	1.10	A1	0079	2230-
250	330	300	.400	.600	8.30	.43	2.58	1.40	C0	0080	2231-
250	470	300	.420	.450	5.80	.51	3.06	1.90	B1	0081	2232-
250	680	300	.300	.310	4.00	.62	3.72	2.50	C1	0082	2233-
250	1,000	300	.200	.210	2.70	.75	4.50	3.00	D1	0083	2234-
250	1,500	300	.130	.140	1.70	.92	5.52	3.70	C2	0084	2235-
250	2,200	300	.090	.110	1.20	1.10	6.60	5.20	C3	0085	2236-
250	3,300	300	.060	.075	.83	1.45	8.17	7.70	F3	0086	2237-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CU71 and CUR71 capacitors - Continued.

DC rated voltage at 85°C	Capacitance	DC surge voltage 85°C	Equivalent series resistance 25°C	Equivalent series resistance 85°C	Maximum impedance @ -55°C & 120 Hz	DC leakage 25°C	DC leakage 85°C	Maximum AC ripple current 1/ 120 Hz @ 85°C	Case size	CU71 Dash number	CUR71 Dash number 2/
Volts	µF	Volts	Ω		Ω	mA		Amps			
300	100	350	1.300	1.850	27.50	.26	1.56	.60	A0	0087	2238-
300	150	350	.900	1.250	18.30	.32	1.92	.90	B0	0088	2239-
300	220	350	.600	.850	12.50	.41	2.32	1.10	C0	0089	2240-
300	310	350	.600	.850	8.90	.30	1.80	1.25	C0	1301	2241-
300	330	350	.480	.560	8.30	.50	2.83	1.40	B1	0090	2242-
300	470	350	.340	.400	5.80	.60	3.38	2.00	C1	0091	2243-
300	680	350	.250	.270	4.00	.68	4.08	2.60	B2	0092	2244-
300	1,000	350	.170	.190	2.70	.82	4.92	3.50	C2	0093	2245-
300	1,500	350	.130	.130	1.70	1.00	6.00	4.20	C3	0094	2246-
300	2,200	350	.090	.100	1.70	1.22	7.28	5.80	E3	0095	2247-
300	3,400	350	.060	.070	.80	1.00	6.00	5.80	F3	1302	2248-
300	3,400	350	.080	.090	.90	1.43	8.00	6.70	F3	1303	2249-
350	68	400	2.300	2.700	40.70	.23	1.38	.50	A0	0096	2250-
350	150	400	1.100	1.250	18.30	.34	2.04	.97	A1	0097	2251-
350	220	400	.700	.800	12.80	.42	2.52	1.10	C0	0098	2252-
350	330	400	.480	.560	8.30	.54	3.06	1.40	C0	0099	2253-
350	470	400	.340	.400	5.80	.61	3.66	2.10	C1	0100	2254-
350	680	400	.230	.270	4.00	.78	4.39	3.30	C2	0101	2255-
350	1,000	400	.160	.180	2.70	.89	5.34	4.00	E2	0102	2256-
350	1,500	400	.130	.140	1.70	1.08	6.48	5.00	D3	0103	2257-
350	1,800	400	.110	.120	1.50	1.19	7.13	5.70	E3	0104	2258-
350	2,200	400	.090	.100	1.20	1.40	7.90	6.70	F3	0105	2259-

1/ The ripple current values shown are representive values not supported by test data.

2/ The last letter in dash number will indicate FR level symbol ("M", "P", "R", or "S").

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Type - Tubular.
Material - Metal.
Terminals - See figure.

DC rated voltage: See table I.

Reverse voltage: 1.5 volts maximum.

Capacitance (Cap) value: See table I.

Capacitance tolerance: -10 +50 percent.

Operating temperature range: -55° to +85°C.

DC leakage (DCL): See table I.

Equivalent series resistance (ESR): See table I.

Low temperature exposure:
DCL - See table I.
Cap. - See table I.
ESR - See table I.

Terminal strength: Method 211 of MIL-STD-202, test condition E.
Torque - 8 pound-inches for case diameter of 1.375 inch; 15 pound-inches for other case diameters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

Stability at reduced and high temperatures:
  Step 1 (at +25°C):
    DCL - See table I.
    Cap. - See table I.
    ESR - See table I.
  Step 2 (at -55°C):
    Impedance - See table I.
    ΔCap. - Within the following percentages of the step 1 value:
      5 Vdc: ±35 percent.
      10 to 25 Vdc inclusive: ±25 percent.
      30 to 350 Vdc inclusive: ±20 percent.

  Step 3 (at +25°C):
    DCL - See table I.
    ΔCap. - Within ±5 percent of step 1 value.
    ESR - See table I.
  Step 4 (at +85°C):
    DCL - See table I.
    ΔCap. - Within ±30 percent of step 1 value.
    ESR - See table I.
  Step 5 (at +25°C):
    DCL - See table I.
    ΔCap. - Within ±5 percent of step 1 value.
    ESR - See table I.

Life: Method 108 of MIL-STD-202.
  For qualification: Condition F (2,000 hours) at 85°C.
    DCL - See table I.
    ΔCap. - Within ±10 percent of initial measured value.
    ESR - Not more than 130 percent of initial requirement.
  For quality conformance: Performance check, condition B (250 hours) at 85°C (non-ER).
    DCL - See table I.
    ΔCap. - Within ±10 percent of initial measured value.
    ESR - See table I.
  For quality conformance: Continuation test (1,750 hours) at 85°C (non-ER).
    DCL - See table I.
    ΔCap. - Within ±10 percent of initial measured value.
    ESR - Not more than 130 percent of initial requirement.
  For quality conformance: 10,000 hours (ER) at 85°C.
    DCL - at 25°C, initial limit; at 85°C 125 percent of initial limit.
    ΔCap. - Within ±25 percent of initial measured value.
    ESR - Not more than 200 percent of initial requirement.

Case insulation: In accordance with MIL-C-39018.

Shock (specified pulse): Method 213 of MIL-STD-202, condition H.

Vibration:
  Low frequency - Method 201 of MIL-STD-202.

Thermal shock and immersion:
  Thermal shock: Method 107 of MIL-STD-202, condition A (2 cycles, 30 minutes).
  Immersion: Method 104 of MIL-STD-202, condition B (2 cycles, 30 minutes).
    DCL - See table I.
    ΔCap. - Within ±5 percent of initial measured value.
    ESR - See table I.
    Case insulation - Shall meet initial requirements.

Surge voltage:
  DCL - See table I.
  ΔCap. - Within ±6 percent of initial measured value.
  ESR - See table I.

Vent: In accordance with MIL-C-39018.

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:03Z
Check the source to verify that this is the current version before use.

Moisture resistance: Method 106 of MIL-STD-202.
DCL - See table I.
ΔCap. - Within ±6 percent of initial measured value.
ESR - See table I.
Case insulation - Shall meet initial requirements.

High temperature exposure (500 hours at 85°C):
DCL - Not more than 200 percent of initial requirement.
ΔCap. - Within ±10 percent of initial measured value.
ESR - Not more than 115 percent of initial requirement.

Reverse voltage aging: In accordance with MIL-C-39018.

Marking: In accordance with MIL-C-39018.
Part number: M39018/04- (dash number from table I).

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Navy - CG, MC, AS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5910-1199-1)

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:03Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:03Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T18:03Z
Check the source to verify that this is the current version before use.