FED. SUP CLASS 4730

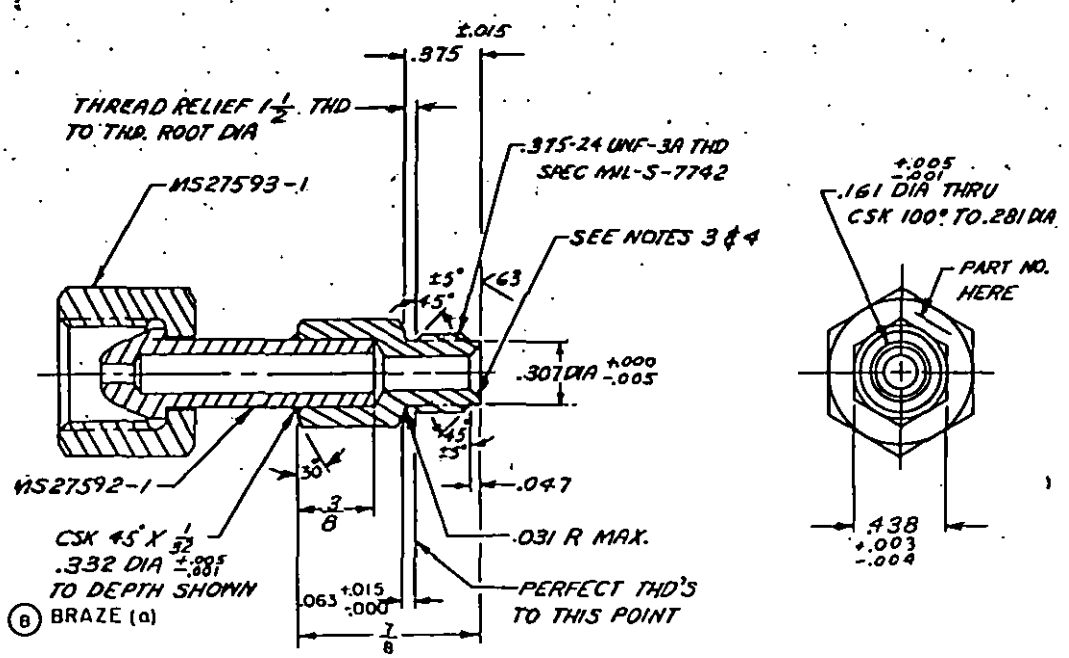

PART NO.
MS27589-1

(B)(a) BRAZING, POST BRAZING TREATMENT AND QUALITY ASSURANCE INSPECTION AND TESTING IN ACCORDANCE WITH MIL-B-7883 FOR TYPE III, GRADE A, JOINTS.

(B)1. MATERIAL - STEEL, CORROSION RESISTANT, QQ-S-763, CLASS 304 OR CLASS 316.

2. FINISH - SURFACE ROUGHNESS 32 ALL OVER PER ANSI B46.1-1962.

3. THIS SURFACE & PITCH DIA. OF THD. SHALL BE CONCENTRIC WITH .004 F.I.R.

4. THIS SURFACE SHALL BE FREE FROM BURRS, LONGITUDINAL & SPIRAL TOOL MARKS, & SHALL BE SMOOTH EXCEPT THAT ANNULAR TOOL MARKS WILL BE ALLOWED TO 100 MICROINCHES RHR MAX.

5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.010, ANGLES ±½°.

6. BREAK ALL SHARP EDGES .010 MAX.

7. THIS STANDARD IS THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 11/9. WHEN AMENDMENT, REVISION, OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

8. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Review Activities:
Air Force - 99
DSA - CS

APPROVED 19 Apr 72 REVISED (A) 10 OCT 73 (B) 2 Nov 76

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force-11 Other Coast Navy-AS	INTERNATIONAL INTEREST	TITLE ADAPTER, OXYGEN SERVICING, US GROUND EQUIPMENT TO RAF AIRCRAFT	MILITARY STANDARD MS27589
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: XGGC1727, 5286484	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. Proj. No. 4730-0613

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.