FED. SUP CLASS
1670

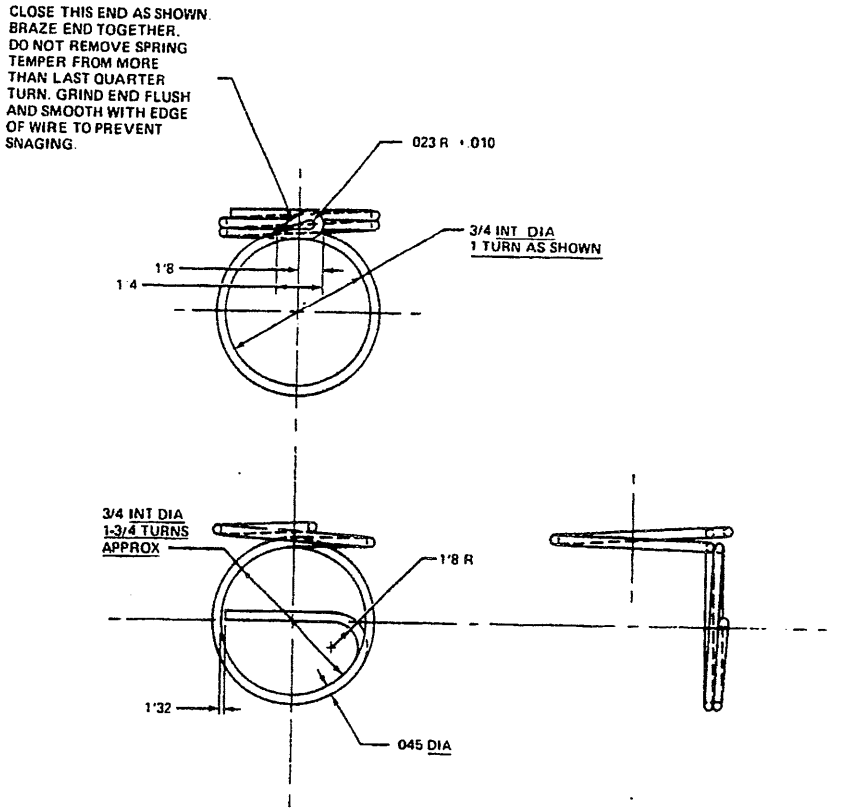

NOTES

1. MATERIAL WIRE, STEEL, CARBON, SPRING, MUSIC QQ-W-470
2. DESIGN LOAD NOT CRITICAL
3. HEAT SPRING 500° TO 550°F FOR 10 MINUTES AFTER FORMING
4. FINISH CADMIUM PLATE, TYPE I, CLASS 1, QQ-P-416
5. REMOVE SHARP EDGES FROM BOTH ENDS OF WIRE
6. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES

   FRACTIONS ± 1/64 DECIMALS NOTED

7. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE FOR INVITATION FOR BID

USAF 82
NAVY-AS

APPROVED 20 Aug 71 REVISED

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-82 Other Cust NAVY-AS	TITLE RETAINER-SNAP PARACHUTE LANYARD	MILITARY STANDARD MS27767
PROCUREMENT SPECIFICATION NONE	SUPERSEDES USAF DWG 57B6112	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:51Z
Check the source to verify that this is the current version before use.