FED. SUP CLASS
1650

REVIEW ACTIVITY: AF-11

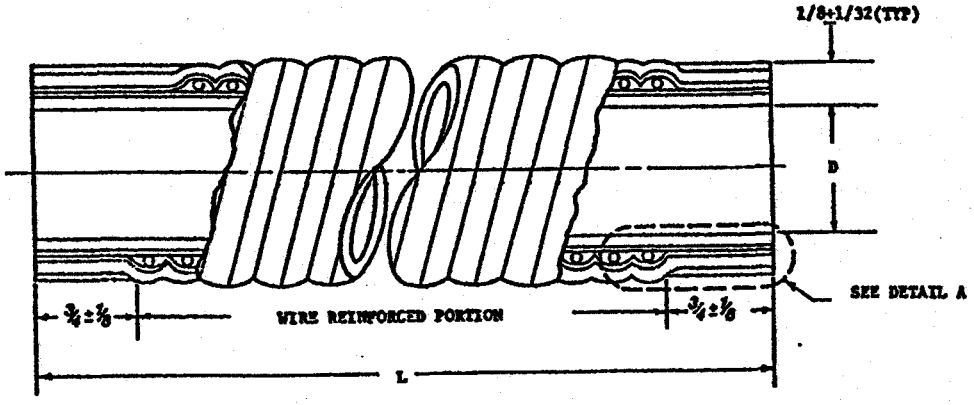

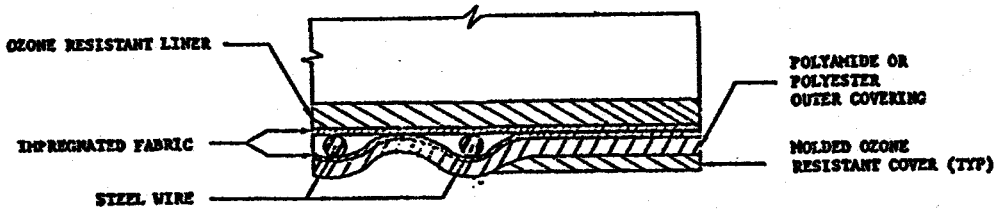

DETAIL A

MS PART NUMBER	D±1/32	L±5%
MS27797-6-52	3/8	5.2
-6-60	3/8	6.0
-6-140	3/8	14.0
-6-214	3/8	21.4
-10-120	5/8	12.0
-10-190	5/8	19.0
-10-200	5/8	20.0
-10-240	5/8	24.0

NOTES:
FIRST DASH IN MS NUMBER IS INSIDE DIAMETER IN SIXTEENTHS OF INCH
SECOND DASH IN MS NUMBER IS LENGTH IN TENTHS OF INCHES
HOSE MUST BE CLEAN, DRY, AND FREE FROM OIL, GREASE, AND OTHER FOREIGN MATERIAL
DIMENSIONS ARE IN INCHES
TOLERANCES ARE AS SPECIFIED

APPROVED 15 DEC 1969 REVISED

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. AF-71 Other Cust	TITLE HOSE, OXYGEN AND PRESSURIZATION, OZONE RESISTANT	MILITARY STANDARD MS 27797 (USAF)
PROCUREMENT SPECIFICATION MIL-H-26735	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 JAN 66 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.