FED. SUP CLASS
5306

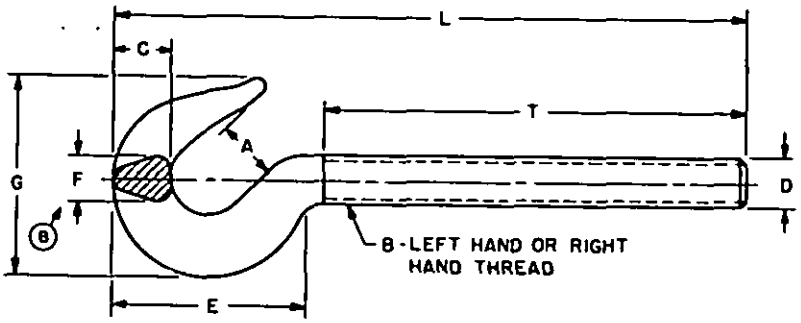

DASH NO. LEFT HAND	DASH NO. RIGHT HAND	D DIA NOM	B THREADS UNC-2A	A MIN	C MIN	E MIN	F MIN	G REF	L REF	T REF	TURNBUCKLE CLEAR OPENING REF	RECOMMENDED WORKING LOAD LBS.
1	2	1/4	20	.438	.375	1.000	.250	1.25	4.25	2.62	4.00	300
3	4	5/16	18	.500	.438	1.250	.312	1.47	4.88	3.00	4.50	500
5	6	3/8	16	.562	.500	1.562	.375	1.66	6.00	4.00	6.00	700
7 9 11	8 10 12	1/2	13	.625	.625	2.000	.500	2.06	6.75 8.25 9.75	4.25 5.75 7.25	6.00 9.00 12.00	1,040
13 15 17 19	14 16 18 20	5/8	11	.812	.750	2.438	.625	2.56	7.62 9.12 10.62 13.62	4.50 6.00 7.50 10.50	6.00 9.00 12.00 18.00	1,600
21 23 25 27 29	22 24 26 28 30	3/4	10	.969	1.000	2.938	.750	3.09	8.50 10.00 11.50 14.50 17.50	4.75 6.25 7.75 10.75 13.75	6.00 9.00 12.00 18.00 24.00	2,000
31 33 35	32 34 36	7/8	9	1.125	1.000	3.438	.875	3.56	9.25 12.25 15.25	5.00 8.00 11.00	6.00 12.00 18.00	2,400
37 39 41	38 40 42	1.	8	1.250	1.250	3.875	1.000	4.03	13.00 16.00 19.00	8.25 11.25 14.25	12.00 18.00 24.00	2,900
43 45 47	44 46 48	1-1/4	7	1.500	1.500	4.938	1.062	5.97	14.75 17.75 20.75	8.50 11.50 14.50	12.00 18.00 24.00	4,600
49	50	1-1/2	6	1.875	1.750	5.875	1.188	6.91	22.00	15.00	24.00	7,200

NOTES:

1. MATERIAL: Steel, form 1 (forged), in accordance with procurement specification.
2. PROTECTIVE COATING: Zinc coated (hot-dip galvanized) in accordance with procurement specification.
3. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
4. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS27953-1.
6. Recommended working load (safety factor 5 to 1), based on breaking strength at thread root.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REVIEWER: EL, IS, ME, MI, NSA, 85, OS, YD
USER: AS, AT, MC,

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 9 FEB 64 REVISED (A) 21 MAR 1969 (B) 15 APR 1970

P.A. WC
Other Cust SH 82

TITLE
BOLT, HOOK-TURNBUCKLE (GENERAL PURPOSE)

MILITARY STANDARD
MS27953

PROCUREMENT SPECIFICATION
FF-T-791

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Cancelled)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.