FED. SUP CLASS.
4820

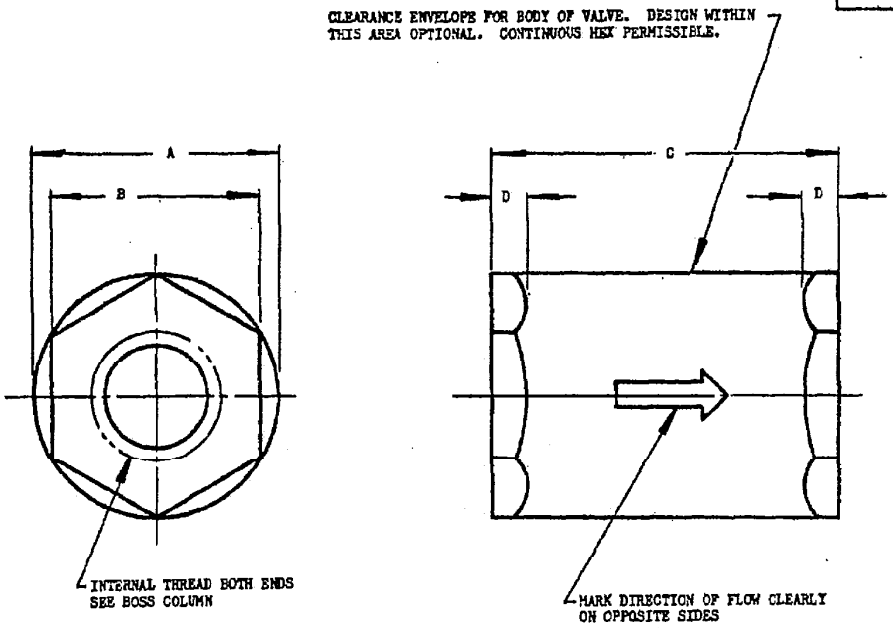

MS PART NO.	FTTH	A MAX	B MAX	C ±1/16	D MIN	WT MAX LB	BOSS	GASKET TWO EACH REQUIRED	TUBING SIZE (REF) OD
MS28050-1		1.750	1.125	2.250	.250	.30	AND10050-4	AN6290-4	.250
MS28050-2		2.000		2.500			AND10050-6	AN6290-6	.375
MS28050-3			1.250		.281		AND10050-8	AN6290-8	.500
MS28050-4		2.188	1.375	3.000	.312	.45	AND10050-10	AN6290-10	.625
MS28050-5		2.500	1.750	3.500	.344	.60	AND10050-16	AN6290-16	1.000

DESIGNED FOR USE WITH AIR, COOLANTS AND WATER AT PRESSURES NOT EXCEEDING 50 PSI.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

APPROVED 1 Sep 55 REVISED

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS28050 (ASG)
Navy - BuAer Air Force	A - N - AF -	VALVE, CHECK, LOW PRESSURE, INTERNAL THREADS	
PROCUREMENT SPECIFICATION MIL-V-6129		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:56Z
Check the source to verify that this is the current version before use.