FED. SUP CLASS
6610

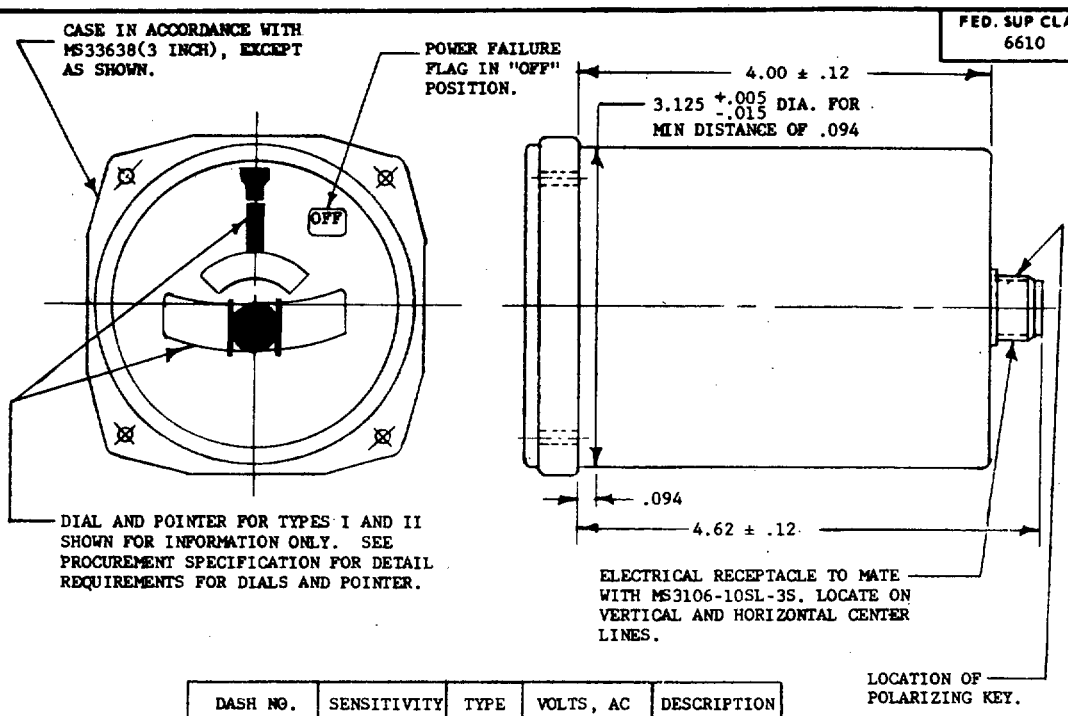

DASH NO.	SENSITIVITY	TYPE	VOLTS, AC	DESCRIPTION
-1	2 MIN TURN	I	26	—
-2	2 MIN TURN	II	115	—
-3	4 MIN TURN	III	26	SENSITIVE
-4	4 MIN TURN	IV	115	SENSITIVE

NOTE:

1. DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) REVISED & REDRAWN

APPROVED 23 JANUARY 1958 REVISED (A) 14 JANUARY 1967

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND, Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY-AS Other Cust	TITLE INDICATOR, TURN AND SLIP (THREE PHASE)	MILITARY STANDARD MS28088(AS)
PROCUREMENT SPECIFICATION MIL-I-7802(AS)	SUPERSEDES: NAF 1282	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 14938
*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-517/4500

DRAWN BY WEAPONS ENGINEERING STANDARDIZATION OFFICE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.