Proj. No 3110-0439

FED. SUP CLASS 3110

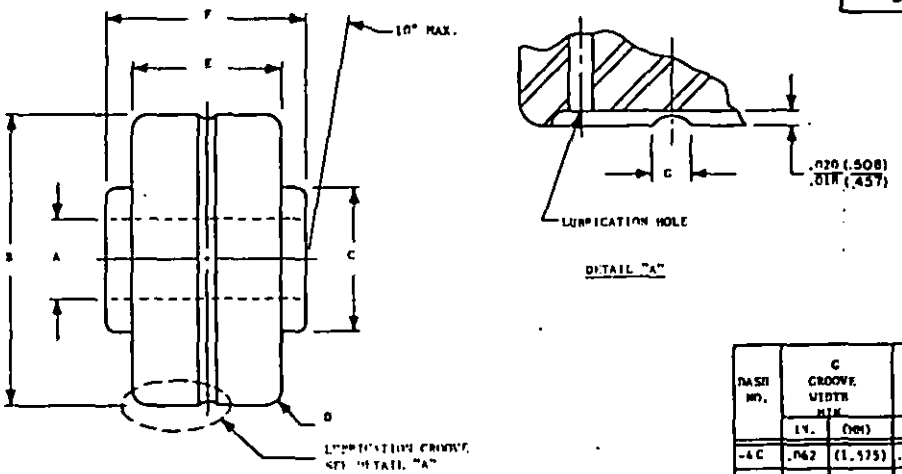

DASH NO.	G GROOVE WIDTH MIN. IN.	G GROOVE WIDTH MIN. (MM)	LUBRICATION HOLE DIA IN.	LUBRICATION HOLE DIA (MM)
-4C	.062	(1.575)	.038	(.965)
-5C			.062	(1.196)
-6C				
-8C	.078	(1.981)	.055	(1.397)
-10C				
-12C				

DASH NO.	A +.0000 (.000) -.0005 (.013) BORE IN.	A BORE (MM)	B +.0000 (.000) -.0005 (.013) O.D. IN	B O.D. (MM)	C +.005 (.127) -.005 (.127) DIA. IN.	C DIA. (MM)	D +.015 (.381) -.009 (.000) RAD. IN.	D RAD. (MM)	F +.000 (.000) -.005 (.127) WIDTH OUTER RING IN.	F OUTER RING (MM)	F +.000 (.000) -.005 (.127) WIDTH INNER RING IN.	F INNER RING (MM)	STATIC LIMIT LOAD - POUNDS RADIAL	STATIC LIMIT LOAD - POUNDS AXIAL	WT. MAX. LB.
-4C	.2500	(6.350)	.9016	(22.896)	.390	(9.900)	.032	(.813)	.466	(11.780)	.625	(15.880)	3025	910	.06
-5C	.3125	(7.938)	1.2500	(31.750)	.515	(13.080)			.656	(16.660)	.812	(20.620)	7350	2220	.17
-6C	.3750	(9.525)	1.4375	(36.512)	.590	(13.970)			.750	(19.050)	.937	(23.800)	9600	2880	.26
-8C	.5000	(12.700)	1.6875	(42.862)	.775	(19.680)	.044	(1.118)	.812	(20.620)	1.000	(25.400)	12500	3750	.38
-10C	.6250	(15.875)	1.9375	(49.212)	.869	(22.070)			.937	(23.800)	1.125	(28.580)	17700	5310	.60
-12C	.7500	(19.050)	2.1750	(60.325)▲	1.090	(27.690)			1.125	(28.570)	1.312	(33.320)	24900	8070	1.04

BASIC (NOMINAL) DIAMETER OVER	BASIC (NOMINAL) DIAMETER INCL.	BEARING ROUNDNESS LIMITS BORE ACCEPTANCE LIMITS d MIN	BORE ACCEPTANCE LIMITS MEAN DIAMETER LOW	BORE ACCEPTANCE LIMITS MEAN DIAMETER HIGH	BORE ACCEPTANCE LIMITS d MAX	O.D. ACCEPTANCE LIMITS D MIN	O.D. ACCEPTANCE LIMITS MEAN DIAMETER LOW	O.D. ACCEPTANCE LIMITS MEAN DIAMETER HIGH	O.D. ACCEPTANCE LIMITS D MAX
.0000 (.000)	2.0000 (50.800)	-.0006(.015)	-.0005(.013)	+.0000(.000)	+.0001(.002)	-.0008(.020)	-.0005(.013)	+.0000(.000)	+.0003(.008)
2.0000(50.800)	4.0000(101.600)	-.0009(.023)	-.0007(.018)	+.0000(.000)	+.0002(.005)	-.0012(.030)	-.0007(.018)	+.0000(.000)	+.0005(.013)

▲ TOLERANCE ON -12 IS +.0000 (.000) TO -.0007 (.018)

MATERIAL: RINGS AND ROLLERS: STEEL, MIL-S-7420 PER FED. STD. NO. 66
RETAINERS: STEEL, MIL-S-5626, OR COPPER, BERYLLIUM, QQ-C-390
FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 2
SURFACE ROUGHNESS: RACEWAYS 8 RMR, ROLLERS 6RMR, IN ACCORDANCE WITH ANSI B46.1. ALL OTHER SURFACES 32 RMR.
REMOVE BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES (MILLIMETERS) UNLESS OTHERWISE SPECIFIED
TOLERANCES: DECIMALS +.010 (.250) TO -.000 (.000)
DIMENSIONS TO BE MET AFTER PLATING

INTERNAL CLEARANCE: TOTAL PLAY, RADIAL .0002 (.005) TO .0010 (.025)

LUBRICATION: MIL-G-81322

FOR DESIGN FEATURE PURPOSE, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(D) ENTIRE STANDARD REVISED.

APPROVED (A) 20 Dec 66 (B) 11 Apr 67 (C) 24 June 70 (D) 15 Nov 73

REVISED 8 Nov 82

P.A. USAF-11	TITLE	MILITARY STANDARD
Other Cust ARMY -AT NAVY -AS	BEARING, ROLLER, SELF-ALIGNING, SINGLE ROW, AIRFRAME, ANTI-FRICTION, SEALED, TYPE I	MS28912
PROCUREMENT SPECIFICATION MIL-B-8914	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

U.S. GOVERNMENT PRINTING OFFICE: 1973—713-148/2520

User activities: Navy - MC, CG

Review activities: Army - AV, ME, MI Air Force - 84 DSA - 15

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.