Proj. No. 3110-0440

FED. SUP CLASS: 3110

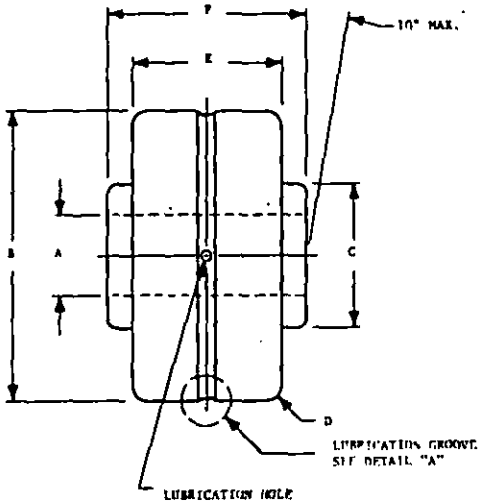

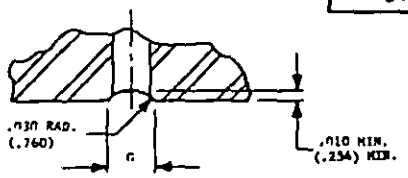

DETAIL "A"

DASH NO.	WT. MAX. LB.	STATIC LIMIT LOAD - POUNDS		DYNAMIC LOAD RATING - POUNDS	
		RADIAL	AXIAL	RADIAL	AXIAL
-4C	.06	3080	1690	2560	1380
-5C	.17	7590	4300	6300	3570
-6C	.26	10700	5790	8390	4800
-8C	.40	12700	6380	10600	5300
-10C	.60	18900	9450	15700	7860
-12C	1.04	31600	15400	26000	12800

DASH NO.	A +.0000 (.000) -.0005 (.013) BORE		B +.0000 (.000) -.0005 (.013) O.D.		C +.005 (.127) -.005 (.127) DIA.		D +.015 (.381) -.000 (.000) RAD.		F +.000 (.000) -.005 (.127) WIDTH OUTER RING		F +.000 (.000) -.005 (.127) WIDTH INNER RING		G GROOVE WIDTH MIN.		LUBRICATION HOLE SIZE	
	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)	IN.	(MM)
-4C	.2500	(6.350)	.9016	(22.896)	.450	(11.430)	.050	(1.270)	.464	(11.780)	.625	(15.880)	.080	(2.030)	.060	(1.524)
-5C	.3125	(7.937)	1.2500	(31.750)	.520	(13.210)			.656	(16.660)	.812	(20.620)				
-6C	.3750	(9.525)	1.4375	(36.512)	.610	(15.490)			.750	(19.050)	.937	(23.800)				
-8C	.5000	(12.700)	1.6875	(42.862)	.820	(20.830)			.812	(20.620)	1.000	(25.400)				
-10C	.6250	(15.875)	1.9375	(49.212)	.960	(23.880)			.937	(23.800)	1.125	(28.580)				
-12C	.7500	(19.050)	2.3750	(60.325)▲	1.120	(28.450)			1.125	(28.580)	1.312	(33.320)	.110	(2.790)	.090	(2.286)

BASIC (NOMINAL) DIAMETER OVER	INCL.	BEARING ROUNDNESS LIMITS: BORE ACCEPTANCE LIMITS d MIN	MEAN DIAMETER LOW	MEAN DIAMETER HIGH	d MAX	O.D. ACCEPTANCE LIMITS D MIN	MEAN DIAMETER LOW	MEAN DIAMETER HIGH	D MAX.
.0000(.000)	2.0000(50.800)	-.0005 (.013)	-.0005(.013)	+.0000(.000)	+.0001(.003)	-.0008(.020)	-.0005(.013)	+.0000(.000)	+.0003(.008)
2.0000(50.800)	4.0000(101.600)	-.0009 (.023)	-.0007(.018)	+.0000(.000)	+.0002(.005)	-.0012(.030)	-.0007(.018)	+.0000(.000)	+.0005(.013)

▲ TOLERANCE ON -12 IS +.0000 (.000) TO -.0007 (.018)

MATERIAL: RETAINERS; STEEL, MIL-S-5626
COPPER, BERYLLIUM PER QQ-C-390
RINGS AND ROLLERS; STEEL, MIL-S-7420 PER FED. STD. NO. 66
FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 2
SURFACE ROUGHNESS: RACEWAYS 8 RMR, ROLLERS 6 RMR, IN ACCORDANCE WITH ANSI B46.1. ALL OTHER SURFACES 32 RMR.
REMOVE BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES (MILLIMETERS). UNLESS OTHERWISE SPECIFIED,
TOLERANCES: DECIMALS +.010 (.250) TO -.000 (.000)
DIMENSIONS TO BE MET AFTER PLATING.

INTERNAL CLEARANCE: TOTAL PLAY, RADIAL .0002 (.005) TO .0010 (.025)

LUBRICATION: MIL-G-81322

FOR DESIGN FEATURE PURPOSE, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED.

APPROVED 8 Nov 62 — REVISED (A) 20 Dec 66 (B) 24 June 70 (C) 15 Nov 73

User activities: Navy - MC, CG

Review activities: Army - AV, ME, MI; Air Force - 84; DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF -11
Other Cust ARMY -AT, NAVY -AS

TITLE: BEARING, ROLLER, SELF-ALIGNING, DOUBLE ROW, AIRFRAME, ANTI-FRICTION, SEALED, TYPE II

MILITARY STANDARD

MS28913

PROCUREMENT SPECIFICATION MIL-B-8914

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

U.S. GOVERNMENT PRINTING OFFICE: 1973-713-148/2527

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.