FED SUP CLASS
5365

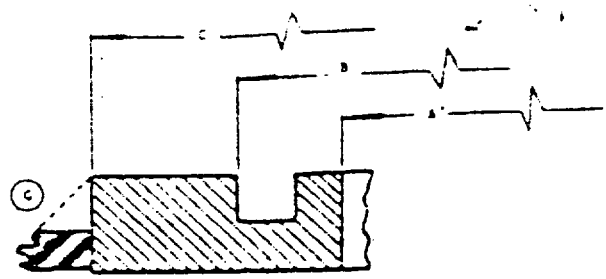

PLAIN GROOVE				GRIP GROOVE				A +.020 -.010 ID	B MIA		C +.020 -.010 MIA
TYPE I		TYPE II		TYPE I		TYPE II					
DASH NO.	FTIR	DASH NO.	FTIR	DASH NO.	FTIR	DASH NO.	FTIR		MAX	MIN	
-221		-221A		G221		G221A		1.000	1.090	1.687	2.500
-225		-225A		G225		G225A		1.750	2.012	1.992	2.750
-226		-226A		G226		G226A		1.500	2.262	2.237	3.000
-228		-228A		G228		G228A		1.750	2.512	2.487	3.250
-230		-230A		G230		G230A		2.000	2.762	2.736	3.500
-232		-232A		G232		G232A		2.250	3.012	2.986	3.750
-234		-234A		G234		G234A		2.500	3.262	3.236	4.000
-236		-236A		G236		G236A		2.750	3.512	3.487	4.250
-238		-238A		G238		G238A		3.000	3.762	3.736	4.500
-242		-242A		G242		G242A		3.500	4.262	4.236	5.000
-246		-246A		G246		G246A		4.000	4.762	4.736	5.500
-250		-250A		G250		G250A		5.000	5.762	5.736	6.500
-258		-258A		G258		G258A		5.586	6.262	6.237	7.000
-261		-261A		G261		G261A		6.175	7.012	6.987	7.625
-263		-263A		G263		G263A		6.625	7.512	7.487	8.125
-265		-265A		G265		G265A		7.125	8.012	7.987	8.625

DASH NUMBERS SHOWN ARE IDENTICAL TO THE APPLICABLE "O" RING DASH NUMBERS SHOWN ON STANDARD MS29513.

FOR ADDITIONAL FLANGE SIZES LARGER THAN THOSE SHOWN: ID & A INCREASES IN INCREMENTS OF .500. ESTABLISH "O" RING TO BE USED BY ADDING .609 TO THE A DIMENSION. THIS FIGURE WILL EQUAL THE NOMINAL "O" RING ID.

DIMENSIONS IN INCHES.

(C) "O"-RING GROOVE IN ACCORDANCE WITH MS33581

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

REVIEWER:
AIR FORCE - 80, 88

APPROVED 10 Apr 51 REVISED (1) 24 Feb 58 (B) 21 May 59 (C) 30 AUG 74

P.A. AIR FORCE - 11 Other Cust Army - : Navy - AS	TITLE (C) FITTING, "O" RING, CIRCULAR, COMPRESSION TYPE, SINGLE GROOVE, TUBE	MILITARY STANDARD MS29558
PROCUREMENT SPECIFICATION MIL-P-6396	APPLICABLE	SHEET 1 OF 1

DD FORM 672-1 (Obsolete)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:02Z
Check the source to verify that this is the current version before use.