FED. SUP CLASS
2915

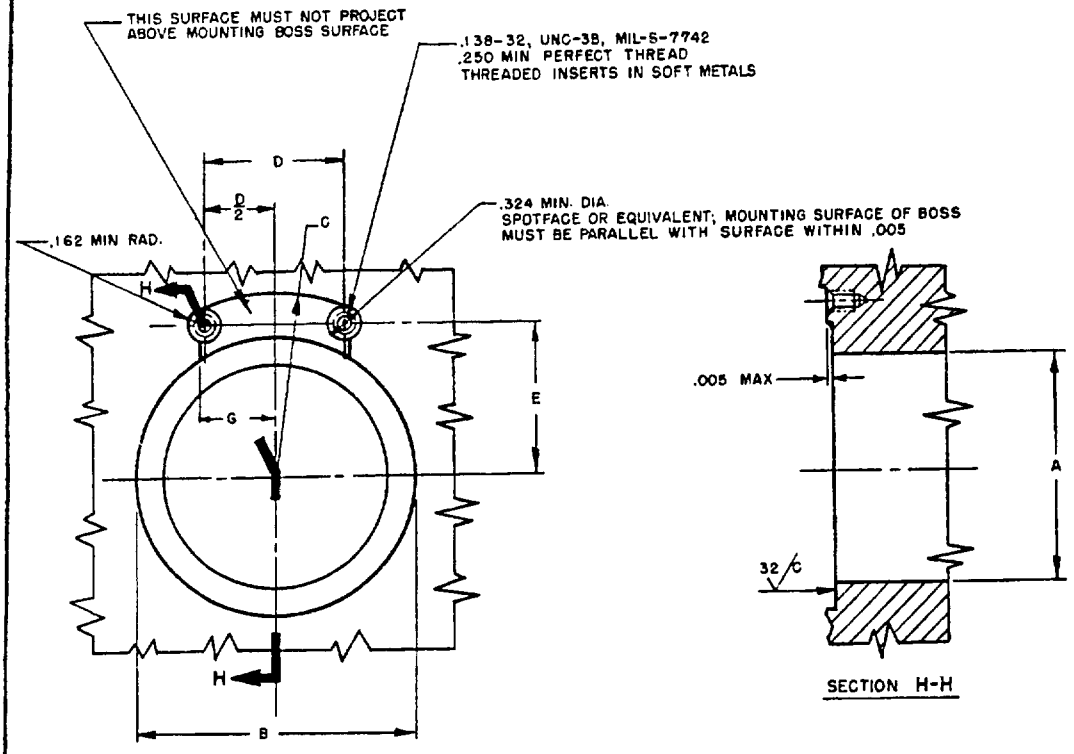

SIZE	A ±.005 DIA	B MIN DIA	C MIN RAD	D ±.005	D/2 ±.0025	E ±.005	G MIN.
12	.561	.963	.777	.860	.4300	.440	.447
16	.792	1.213	.926	1.110	.5550	.525	.572
20	1.024	1.557	1.107	1.248	.6240	.710	.641
24	1.248	1.807	1.210	1.240	.6200	.825	.637
28	1.483	2.120	1.360			1.025	
32	1.719	2.307	1.461	1.382	.6910	1.100	.708
40	2.203	2.839	1.819	1.406	.7030	1.500	.720
48	2.703	3.339	2.056	1.656	.8280	1.703	.845
56	3.213	4.026	2.405	2.093	1.0470	1.984	1.064
64	3.711	4.526	2.677	2.313	1.1560	2.234	1.173

(C) SURFACE TEXTURE IN ACCORDANCE WITH USAS B46.1-1962.

DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 31 Dec 52 REVISED (A) 4 Sep 62 (B) 3 Aug 64 (C) 1 Mar 76

Review activities:
Army - AV
Navy - AS
Air Force - 11, 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force - 11 (C) Other Cust Army - AV Navy - AS	TITLE MOUNTING PAD - SWING CHECK VALVE ELEMENT, FUEL	MILITARY STANDARD MS33535	
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 672-1

Project No. 2915-0086

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:04Z
Check the source to verify that this is the current version before use.