FED SUP CLASS
5310

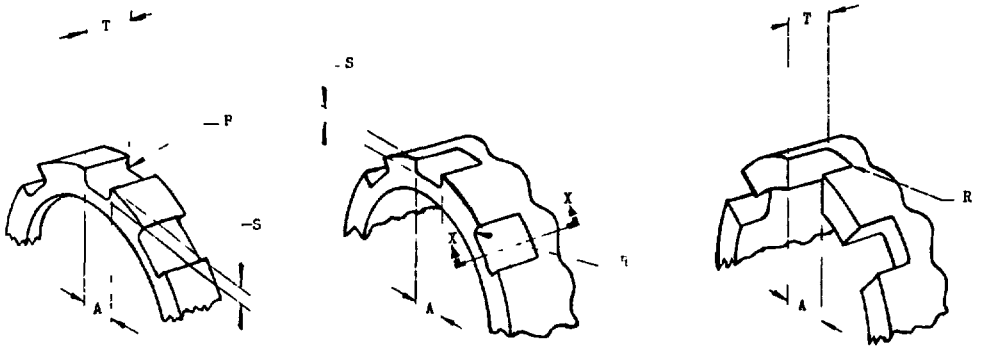

PERIPHERAL SLOT
TYPE A

NOTCHED SLOT
TYPE B

END SLOT
TYPE C



DETAIL X-X

DIMENSIONS (INCHES)

NOMINAL O/D OF NUT		WIDTH OF SLOT A MINIMUM	LENGTH OF SLOT T MINIMUM	DEPTH OF SLOT S MINIMUM	RADIUS R		NUMBER OF SLOTS
ABOVE	UP TO AND INCLUDING				MIN	MAX	
1 000	1 500	250	187	.25	020	030	4
1 500	2 360		250				8
2 360	3 750			.50			12
3 750	6 000	375	312	200	030	050	15
6 000	10 000	500	375				18

THIS DESIGN STANDARD IS TO BE USED ON CYLINDRICAL NUTS ABOVE 1 000 INCH OD HAVING AIRFRAME APPLICATIONS

FOR BEARING RETENTION OR AIRCRAFT PROPULSION APPLICATIONS, USE MS172236 THRU MS172270 OR MS172321 THRU MS172370, RESPECTIVELY

THE RADIAL RELATIONSHIP OF SLOTS SHALL BE WITHIN ±1 DEGREE.

CERTAIN PROVISIONS (NUT AND SLOT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/49 WHERE REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER

APPROVED 22 DEC 1966 REVISED

User Activities: Army - EI, MI

Review activities: Army - AV, MI
Navy - AS
USAF - 11

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use should be made from this document

PREPARING ACTIVITY: Army -AS Other Cust Army -AV USAF -11	INTERNATIONAL INTEREST	TITLE RETAINING FEATURES FOR CYLINDRICAL NUTS, DESIGN STANDARD FOR	MILITARY STANDARD MS33784
PROCUREMENT SPECIFICATION	SUPERSEDES		SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

*U.S. GOVERNMENT PRINTING OFFICE: 1967 581 590/248

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:08Z
Check the source to verify that this is the current version before use.