FED. SUP CLASS
5910

CONTACT SPRI
BERYLLIUM C PER SP
MIL-C-694

STEATITE, GRADE L-4
PER SPEC JAN-I-10

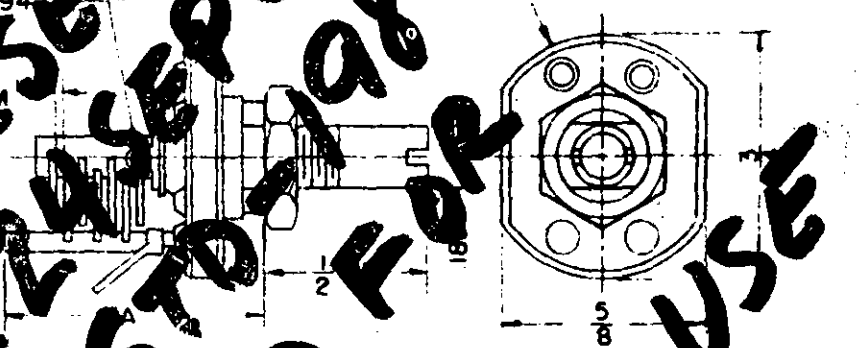

A	CAPA	DI	
	MAX	A ± 1/	FIDI
-1	8.69 UUF	3/16	
-2	19.7 UUF	1 /64	
	12.9 UUF	/32	
	UUF	39/64	
	16. UUF	1 1/	

NOTES:

1. TOLERANCES ON DECIMAL ±.005, FRACTIONAL ± 1/64 UNLESS OTHERWISE INDICATED.
2. CAPACITORS SHALL BE USED ONLY WHEN RELATIVELY FEW ADJUSTMENTS WILL BE REQUIRED THROUGHOUT THE LIFE OF THE EQUIPMENT.
3. THE TORQUE REQUIRED TO START AND TURN THE ROTOR OF THE CAPACITOR SHALL BE BETWEEN 2 AND 10 OUNCE INCHES.
4. CAPACITORS SHALL MEET ALL REQUIREMENTS OF CLASS I CAPACITORS IN ACCORDANCE WITH SPECIFICATION MIL-C-92 EXCEPT AS TO PHYSICAL DIMENSIONS AND EXCEPTIONS STATED IN NOTES 1 AND 2 ABOVE.
5. REFERENCED SPECIFICATIONS IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.

APPROVED 24 JULY 1961 REVISED 10 JUN 64 8 24 SEPTEMBER 1965

ALL DIMENSIONS IN INCHES

CUSTODIAN	MILITARY STANDARD	MS 35040 (SIG C)
SIGNAL CORPS	CAPACITOR, VARIABLE, AIR DIELECTRIC (TRIMMER)	
PROCUREMENT SPECIFICATION		SHEET 1 OF 1

DD FORM 1 OCT 66 233

SUPERSEDED AFTER 1 SEP 65 BY MIL-STD-198
USE MIL-STD-198 FOR SELECTION OF STANDARD ITEMS.
USE MIL-C-92 FOR PROCUREMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:08Z
Check the source to verify that this is the current version before use.