NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SPEC CLASS 5935

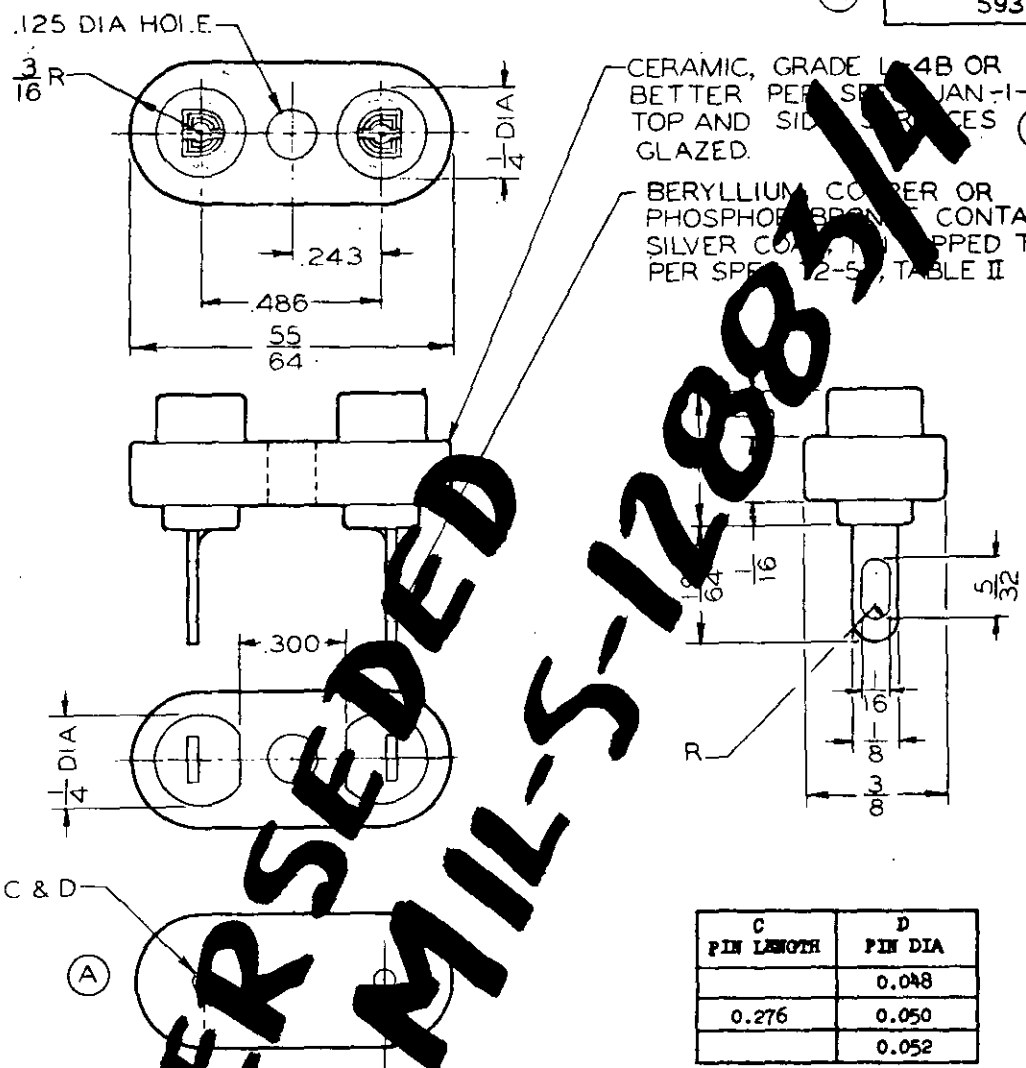

C PIN LENGTH	D PIN DIA
	0.048
0.276	0.050
	0.052

TEST JIG CONFIGURATION

SUPERSEDED USE MIL-S-12883/4

NOTES:

1. TOLERANCES ON [illegible] SOCKETS SHALL BE ±1/64, DECIMAL DIMENSIONS ±.005, UNLESS OTHERWISE SPECIFIED.
2. THE SOCKET SHALL ACCOMMODATE CRYSTAL HOLDER TYPE HC-6/U, ETC.
3. THE SOCKET [illegible] MOLDED WITH THE MANUFACTURER'S NAME OR SYMBOL.
4. REFERENCED SPECIFICATIONS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
5. INSERTION AND WITHDRAWAL FORCE (1.5 LBS MIN TO 6.0 LBS MAX) DIELECTRIC TEST (2000 VOLTS AC FOR ONE MINUTE).
6. CRYSTAL HOLDER TYPE HC-6/U OR EQUAL TO BE USED AS TEST JIGS FOR SHOCK AND VIBRATION TESTS.
7. STATIC LOAD, MOISTURE RESISTANCE, AND TUMBLING NOT APPLICABLE.

DASH NO.	PIN
-1	256-8693

ALL DIMENSIONS IN INCHES.

Project 5935-A122

APPROVED 24 JULY 53 REVISED (A) 23 FEB 1954 B 24 March 1966

CUSTODIAN	MILITARY STANDARD	MS35094 (SIG C)
SIGNAL CORPS	SOCKET, CRYSTAL	
PROCUREMENT SPECIFICATION MIL-S-12883(SIGC)		SHEET 1 OF 1

NB FORM 1 NOV 50 233

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.