FED. SUP CLASS
1290

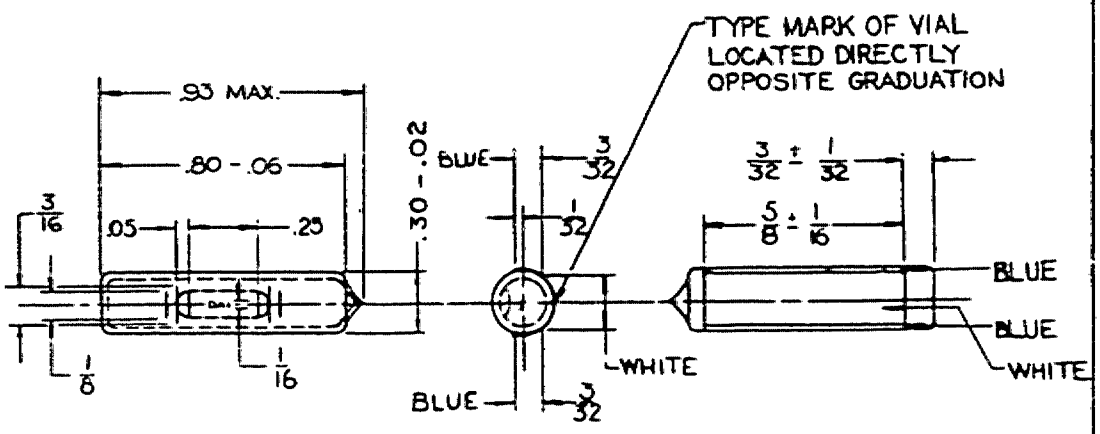

DASH NO.	TYPE DESIGNATION	SENSITIVITY .1 OF AN INCH	
		MAX.	MIN.
-1	DA1	0' 40"	1' 20"
-2	DA2	2' 00"	3' 00"
-3	DA3	4' 30"	5' 30"
-4	DA4	20' 00"	30' 00"

MATERIAL: GLASS

TOLERANCE: DECIMAL ± .010, FRACTIONAL ± 1/64, UNLESS OTHERWISE SPECIFIED

NOTES:
1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. VIAL TO BE FILLED WITH A CLEAR LIQUID WHICH WILL PROVIDE A BUBBLE HAVING A UNIFORM MOVEMENT.

APPROVED 10 June 1953 REVISED (B) 20 June 1969

ENTIRE STANDARD REVISED

P.A. ARMY - MI	TITLE	MILITARY STANDARD
Other Cust: NAVY - OS, AIR FORCE - 84	VIAL, LEVEL, CYLINDRICAL, TYPE DA	MS 35102
PROCUREMENT SPECIFICATION: MIL-V-31...	SUPERSEDES	SHEET OF

User activities: Army - MI, MC; Navy - MC; Air Force - None

Review activities: Army - MU; Navy - OS; Air Force - 84

This military standard is approved by the Department of Defense and is mandatory on all activities. Suggestions for all new engineering and design applications and for revisions are shall be made from this document.

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.