USER ACTIVITY: NAVY - MC
REVIEW ACTIVITY: DLA - IS
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
5340

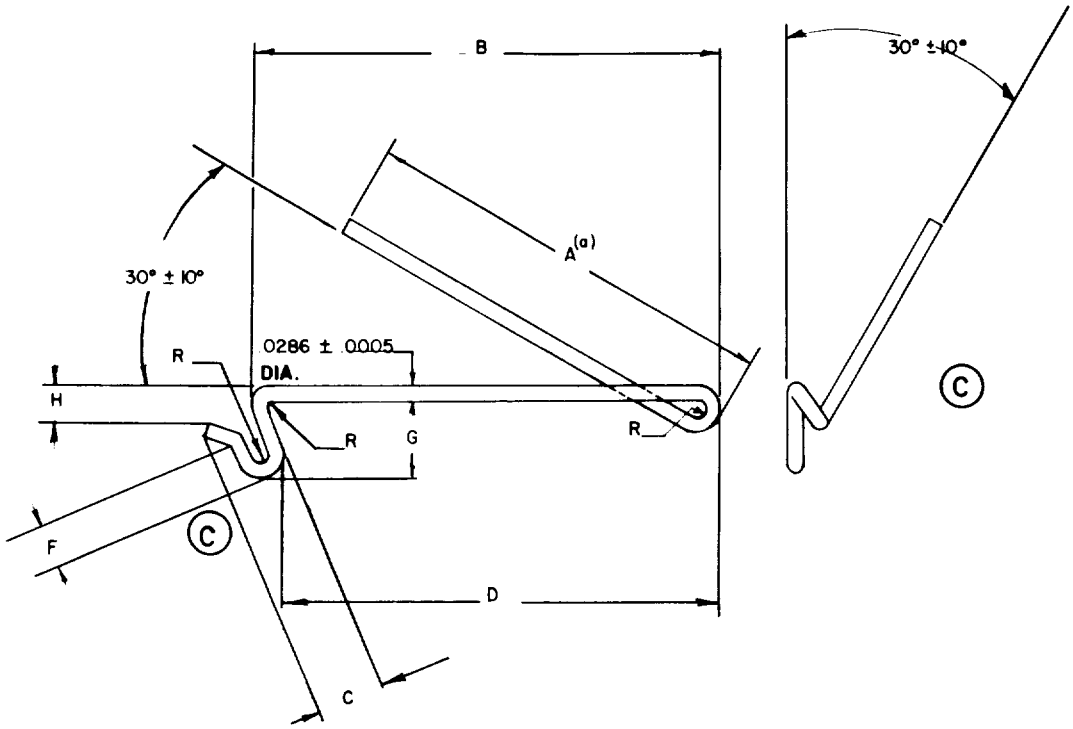

DASH NO.	(a) A	B	C +.010 −.015	D	F	G	H	R RAD
−1	.965	1.115	.150	1.078	.125	.300	.165	.032
−2	1.875	2.000		1.955		.315	.180	
−3	2.045	2.140	.215	2.015	.150	.430	.275	

(a) DIMENSION A MUST BE HELD WITHOUT DISTORTION AT END.

METERIAL: CORROSION RESISTANT STEEL WIRE, QQ-W-423, COMPOSITION FS302, CONDITION B.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015. UNLESS OTHERWISE SPECIFIED, ALL INTERNAL RADII .032 +.000, −.015.

FOR LOCK CLIPPING OF AIRCRAFT TURNBUCKLES, SEE MS33736.
ENDS OF LOCKING CLIP SHALL BE CUT SQUARE AND SHALL BE FREE OF BURRS.

APPROVED 1 NOV 61 — REVISED (A) 1 JUN 62 (B) 25 NOV 63 (C) 1 [illegible] 83

(C) LOCKING CLIPS ARE FOR ONE TIME USE ONLY AND SHALL NOT BE REUSED.

(C) REVISED AND REDRAWN

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P. A. AF - 82 (C) Other Cust NAVY - AS ARMY - AV AF - 99	INTERNATIONAL INTEREST	TITLE: CLIP, LOCKING, TURNBUCKLE	MILITARY STANDARD MS 21256
PROCUREMENT SPECIFICATION MIL-T-8878	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT 5340-1528

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.