FED. SUP CLASS
4730

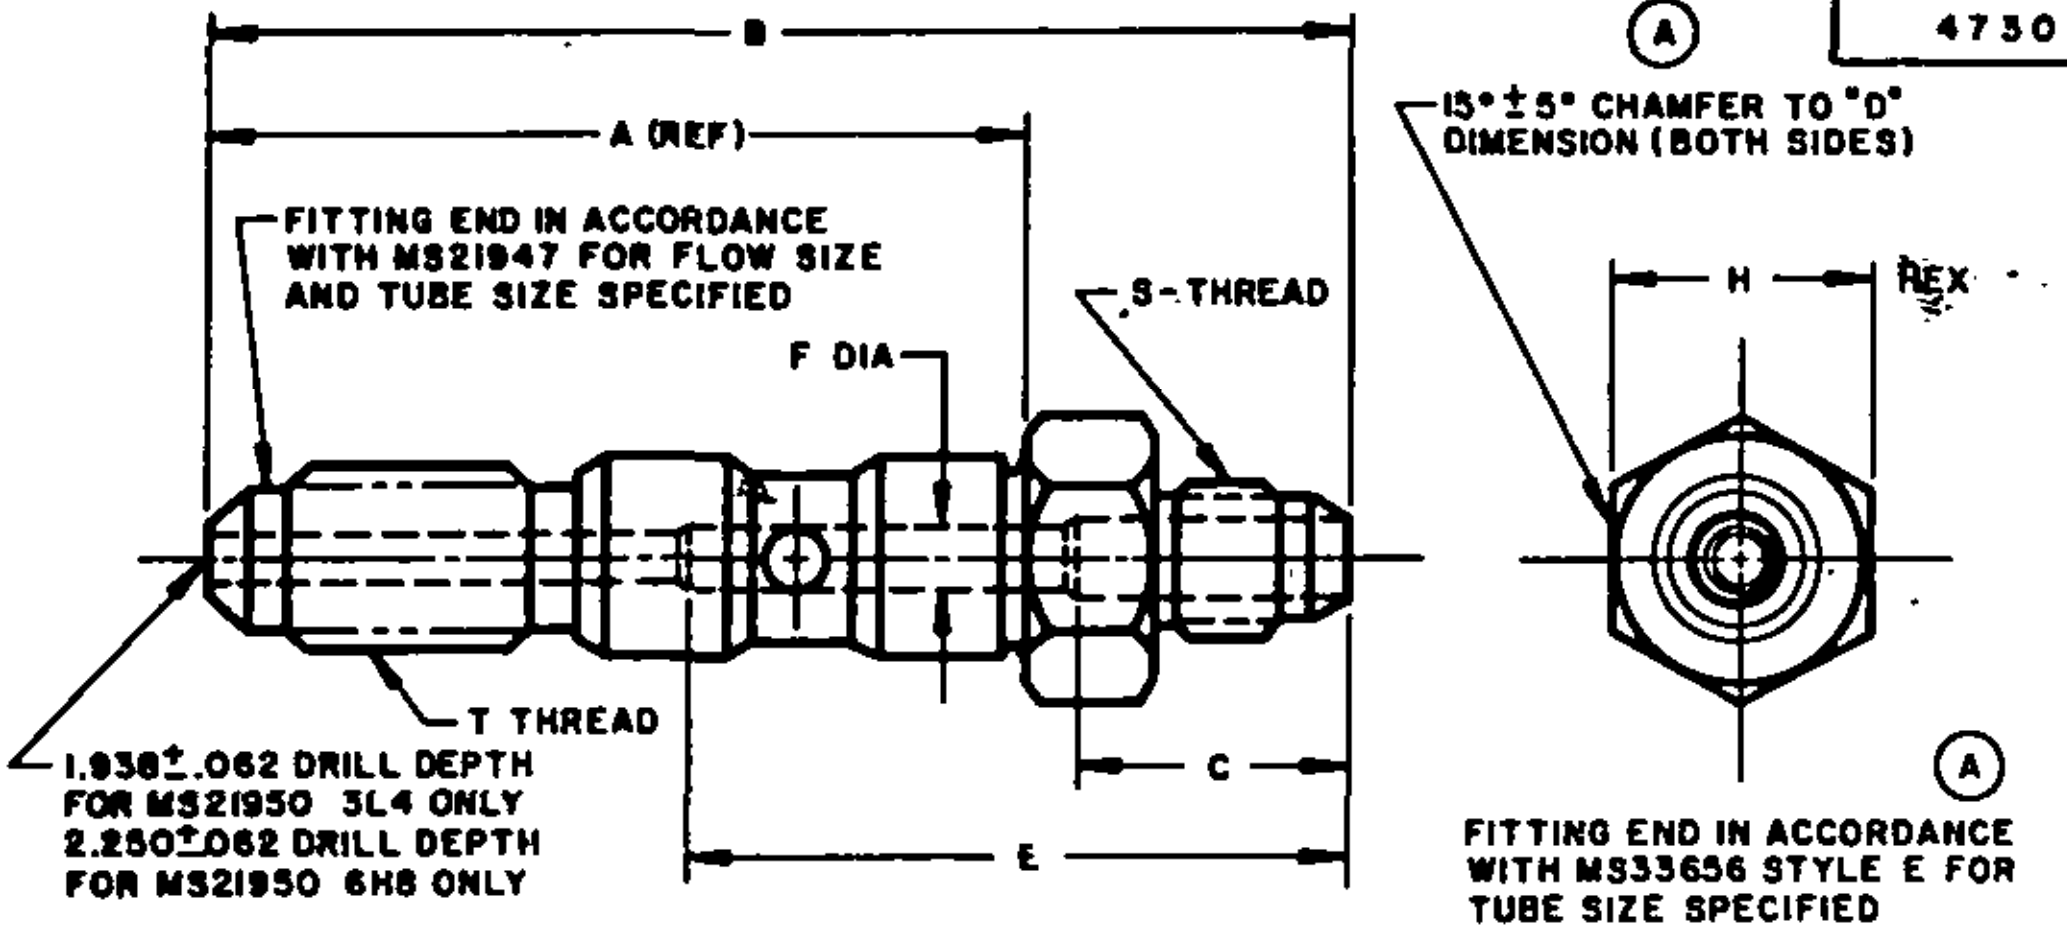
B
A (REF)
FITTING END IN ACCORDANCE WITH MS21947 FOR FLOW SIZE AND TUBE SIZE SPECIFIED
F DIA
S - THREAD
T THREAD
1.938 ± .062 DRILL DEPTH FOR MS21950 3L4 ONLY
2.250 ± .062 DRILL DEPTH FOR MS21950 6H8 ONLY
C
E
Ⓐ
15° ± 5° CHAMFER TO "D" DIMENSION (BOTH SIDES)
H
HEX
Ⓐ
FITTING END IN ACCORDANCE WITH MS33656 STYLE E FOR TUBE SIZE SPECIFIED

LOW FLOW SIZE MS PART NUMBER	TUBE OD	THREAD S (REF)	TUBE OD	THREAD T (REF)	A (REF)	B	C ±.062	D +.000 −.015	E ±.062	F ±.003	H HEX
MS 21950-3L4	3/16	3/8-24 UNF-3A	1/4	7/16-20 UNF-3A	2.072	2.863	——	.621	——	——	.621 .628
MS 21950-4L4	1/4	7/16-20 UNF-3A	1/4	7/16-20 UNF-3A	2.072	2.966	THRU	.684	THRU	.172	.684 .691
MS 21950-5L4	5/16	1/2-20 UNF-3A	1/4	7/16-20 UNF-3A	2.072	3.028	.750	.746	1.812	.203	.746 .753
MS 21950-6L4	3/8	9/16-18 UNF-3A	1/4	7/16-20 UNF-3A	2.072	3.086	.750	.871	1.812	.203	.871 .878
MS 21950-8L4	1/2	3/4-16 UNF-3A	1/4	7/16-20 UNF-3A	2.072	3.166	.750	.996	1.937	.203	.996 1.003

HIGH FLOW SIZE MS PART NUMBER	TUBE OD	THREAD S (REF)	TUBE OD	THREAD T (REF)	A (REF)	B	C ±.062	D +.000 −.015	E ±.062	F ±.003	H HEX
MS 21950-6H4	3/8	9/16-18 UNF-3A	1/4	7/16-20 UNF-3A	2.353	3.346	——	.871	2.000	.297	.871 .878
MS 21950-6H5	3/8	9/16-18 UNF-3A	5/16	1/2-20 UNF-3A	2.353	3.346	——	.871	2.000	.297	.871 .878
MS 21950-6H6	3/8	9/16-18 UNF-3A	3/8	9/16-18 UNF-3A	2.359	3.352	THRU	.871	THRU	.297	.871 .878
MS 21950-6H8	3/8	9/16-18 UNF-3A	1/2	3/4-16 UNF-3A	2.460	3.453	——	.871	——	——	.871 .878
MS 21950-8H4	1/2	3/4-16 UNF-3A	1/4	7/16-20 UNF-3A	2.353	3.447	——	.996	2.125	.391	.996 1.003
MS 21950-8H5	1/2	3/4-16 UNF-3A	5/16	1/2-20 UNF-3A	2.358	3.447	——	.996	2.125	.391	.996 1.003
MS 21950-8H6	1/2	3/4-16 UNF-3A	3/8	9/16-18 UNF-3A	2.358	3.453	——	.996	2.125	.391	.996 1.003
MS 21950-8H8	1/2	3/4-16 UNF-3A	1/2	3/4-16 UNF-3A	2.460	3.554	THRU	.996	THRU	.391	.996 1.003
MS 21950-10H4	5/8	7/8-14 UNF-3A	1/4	7/16-20 UNF-3A	2.363	3.648	.937	1.121	2.188	.422	1.121 1.128
MS 21950-10H5	5/8	7/8-14 UNF-3A	5/16	1/2-20 UNF-3A	2.363	3.648	.937	1.121	2.188	.422	1.121 1.128
MS 21950-10H6	5/8	7/8-14 UNF-3A	3/8	9/16-18 UNF-3A	2.369	3.654	.937	1.121	2.188	.422	1.121 1.128
MS 21950-10H8	5/8	7/8-14 UNF-3A	1/2	3/4-16 UNF-3A	2.460	3.755	.937	1.121	2.188	.422	1.121 1.128

Ⓐ MATERIAL: ALUMINUM ALLOY BAR 24S SPECIFICATION QQ-A-225/6 TEMPER T4 OR TEMPER T4 ARTIFICIALLY AGED.
FINISH: SEE PROCUREMENT SPECIFICATION.
ALL OUTSIDE MACHINED SURFACES 125 MICROINCHES R.M.S. MAX. ALL INSIDE 250 MAX. UNLESS OTHERWISE NOTED.
FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
INSTALL PER MS 21981

Ⓐ FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

User activities:

Review activities:
ARMY - MI
DSA - CS

APPROVED 15 FEB 1956 REVISED Ⓐ 30 SEP 75

P.A. USAF - 82 Other Cust NAVY - AS ARMY - MI	TITLE BOLT - CLUSTER FITTING SINGLE PORT THROUGH - FLARE	MILITARY STANDARD MS21950
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:42Z
Check the source to verify that this is the current version before use.