FED SUP CLASS
5935

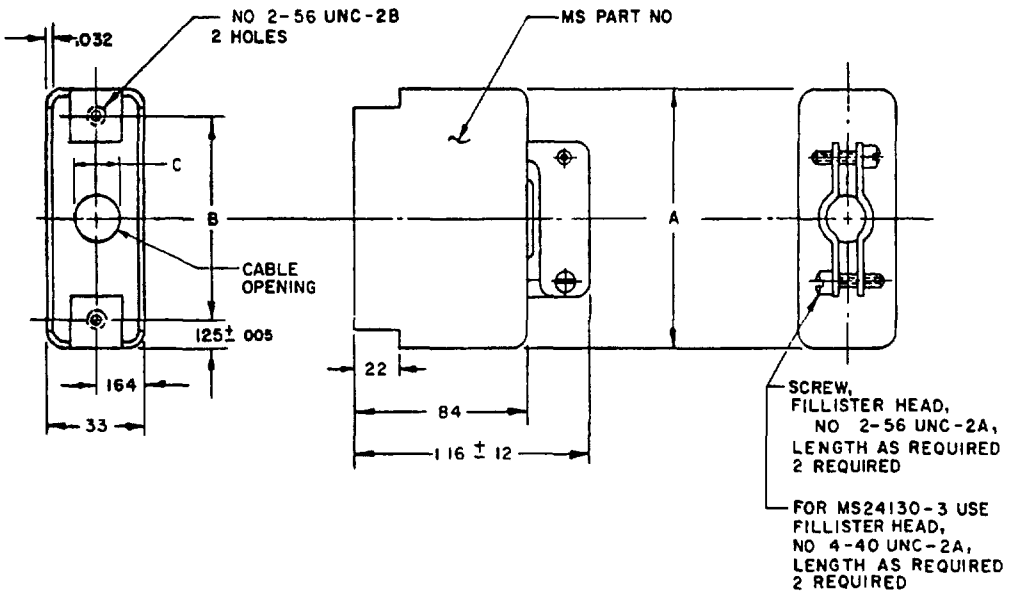

MS PART NUMBER	A	B ±.002	C	USED WITH
MS24130-2	.88	.625	.22	MS24045, MS24046
MS24130-3	1.25	1.000	.22X.41	MS24049, MS24050

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.164	4.17	.84	21 34
.005	.13	.22	5.59	.88	22.35
032	.81	33	8.38	1.000	25.40
.12	3.05	.41	10.41	1.16	29 46
.125	3.18	625	15.88	1.25	31.75

(C) INACTIVE FOR NEW DESIGN
AFTER 6 DECEMBER 1971

NOTES:
1. Material - Aluminum alloy, spec. QQ-A-318, temper H22.
   Finish - Anodize, spec MIL-A-8625, type I or type II, or chromate, spec. MIL-C-5541.
2. Dimensions in inches: Unless otherwise specified, tolerance is ±.02 (.51 mm) for two place decimals.
3. Referenced documents shall be of the issue in effect on the date of invitation for bids.
4. This standard takes precedence over documents referenced herein.
5. Group A and B inspection is required in lieu of qualification.

(C) REDRAWN

APPROVED 12 AUG 1954 REVISED (C) 6 Dec 1971

User activities: Army ME, AM, WC
Navy MC, SH
Air Force

Reviewer activities: Army MI, MU, AT
Navy AS, OS
Air Force 11

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A NAVY-EC Other Cust AF-80 ARMY-EL	International interest	TITLE HOOD, ELECTRICAL, FOR 3 AMP. CONNECTOR	MILITARY STANDARD MS24130
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 1

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-1722-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:47Z
Check the source to verify that this is the current version before use.