FED. SUP CLASS
(C) 5935

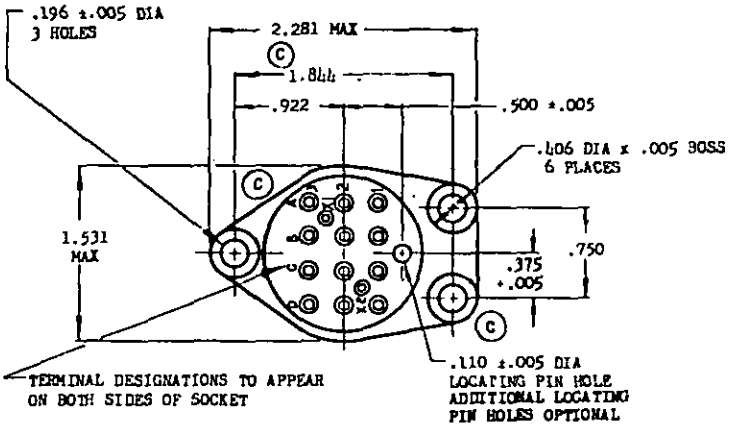

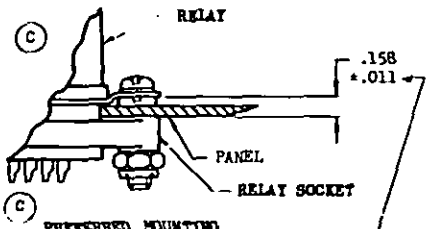

(C) PRESSURED MOUNTING

(C) USE SPACERS SUPPLIED WITH MS25332-1 TO ACCOMPLISH THE INDICATED SPACING

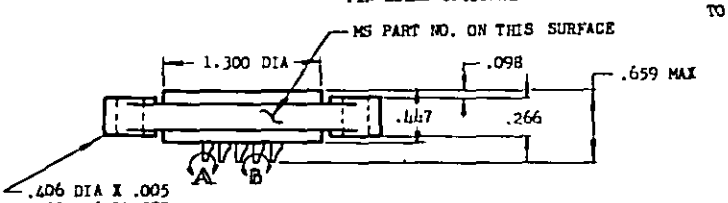

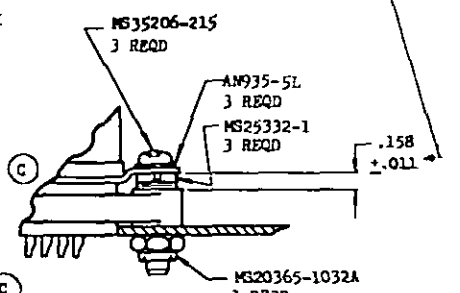

(C) ALTERNATE MOUNTING

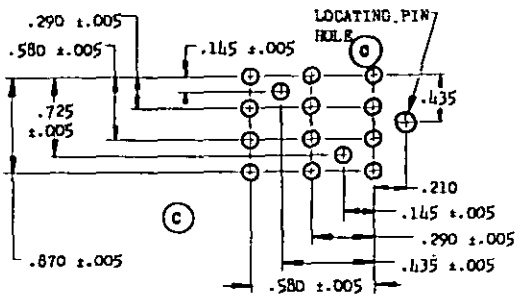

PIN RECEPTACLE LAYOUT

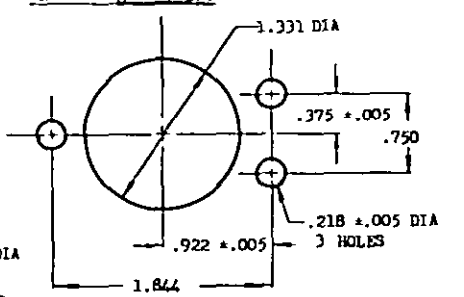

(C) TYPICAL MOUNTING HOLE LAYOUT

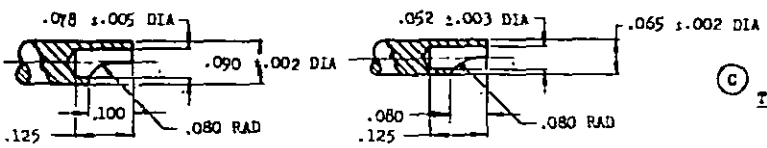

(C) DETAIL A
12 PINS

(C) DETAIL B
PINS #1 AND #2

DASH NO.	MAX WT LB WITHOUT HARDWARE
-4	.080

(A) INSERTION AND WITHDRAWAL FORCES:
MEASURED WITH: .0390 +.0001 -.0000 DIA PIN — 1 OZ MIN
.0615 +.0001 -.0000 DIA PIN — 2 OZ MIN
(B) VIBRATION, MIL-STD-202, METHOD 204, CONDITION B, WITH MS25327 INSERTED — 10G, 10 TO 1500 CPS
(C) CONTACT TABS, PARA 3.8, MIL-S-12883 — NOT APPLICABLE
(D) AMBIENT TEMPERATURE RANGE — -65°C TO +120°C
(E) PIN ENTRY — PARA 3.3.1.2, MIL-C-5015
(F) DIELECTRIC, MIN, WITHOUT MATING RELAY ENGAGED
SEA LEVEL — 2500 VRMS
ALTITUDE (80,000 Ft) — 500 VRMS
(G) MATING RELAY — MS25327
(C) (H) PLATING, PARA 3.2.2 — NOT APPLICABLE
(I) MATERIAL: BODY; MIL-M-19833, TYPE GDI-30F
(C) (J) CONTACT PLATING — GOLD PLATE MIL-G-45204, TYPE II, CLASS 2 OVER NICKEL QQ-N-290, CLASS 2, TYPE VII (QC)

(C) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

FOR DESIGN FEATURE PURPOSES. THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - MP Other Cust USAF - 85	TITLE SOCKET, RELAY, ELECTRICAL, 14 CONTACTS, 10 AMP	MILITARY STANDARD MS25328(ASG)
PROCUREMENT SPECIFICATION MIL-S-12883	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Reverse of this sheet)

APPROVED 12 May 58 REVISED (B) 1 Mar 63 (C) 12 Mar 65

Reviewers: Navy - MP
USAF - 85

This standard has been approved by the Bureau (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2020-10-25T19:08Z
Check the source to verify that this is the current version before use.