FED. SUP CLASS
5925

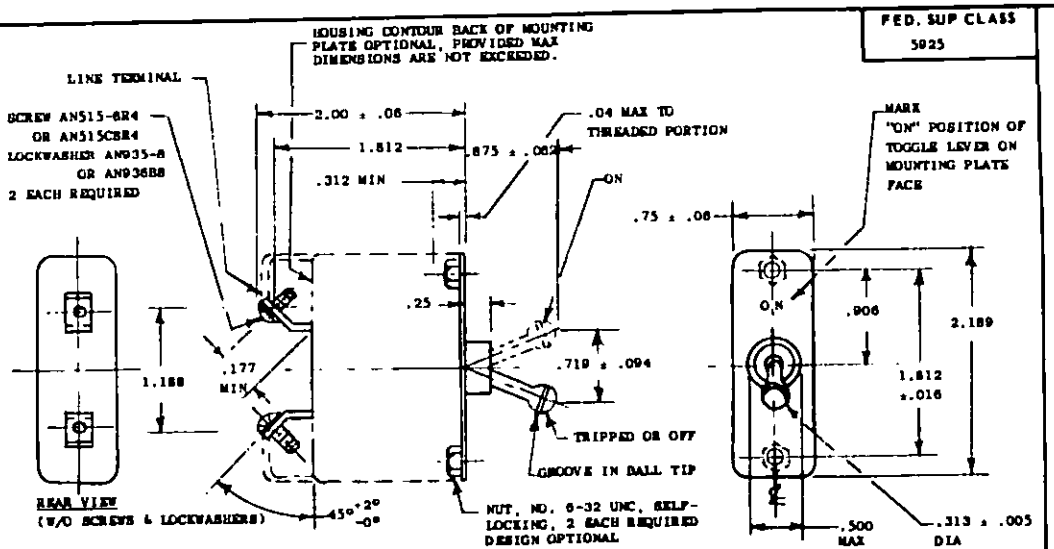

DETAIL RUPTURE CURRENT PERFORMANCE					
TEST NO.	SYSTEM	VOLTAGE BEFORE FAULT	CALIBRATED FAULT CURRENT (AMPERES)	TRANSIENT VOLTAGE AFTER CALIBRATED FAULT CURRENT INTERRUPTION	OPEN CIRCUIT VOLTAGE
A B	400 CYCLE 115/200 VOLT	120 ± 5	2000 IN 10 TO 25 CYCLES AFTER FAULT INITIATION POWER FACTOR .4 TO .5 LAGGING	120 WITHIN 3 CYCLES 150 WITHIN 6 CYCLES 165 MAXIMUM	120 ± 5
C D	28 VOLT DC	30 ± 2	3000 IN .01 TO .03 SECONDS AFTER FAULT INITIATION	28 WITHIN .002 SECOND 50 MAXIMUM	30 ± 2
I	400 CYCLE 115/200 VOLT	120 ± 5	2000 1000 750	120 WITHIN 3 CYCLES 165 MAXIMUM	120 ± 5
J	28 VOLT DC	30 ± 2	3000 1500 1000	28 WITHIN .002 SECOND 50 MAXIMUM	30 ± 2

DETAIL ENDURANCE PERFORMANCE			
SYSTEM	VOLTAGE	LOAD	CYCLES
400 CYCLE 115/200 VOLT	120 ± 5 400 ± 20 CPS	INDUCTIVE .6 to .7 LAG	2500
		RESISTIVE	5000
28 VOLTS DC	30 ± 2	INDUCTIVE	2500
		RESISTIVE	5000
CYCLING	0.0	NO LOAD	10000

DETAIL CALIBRATION PERFORMANCE				
TEST	CIRCUIT BREAKER RATING	PERCENT RATED CURRENT	AMBIENT TEMP °C ±2° C	TRIPPING TIME
MIN ULTIMATE TRIP	5-50	115	25	NO TRIP (a)
MAX ULTIMATE TRIP	5-50	135	25	1 HOUR, MAX
OVERLOAD CALIBRATION	5-50	200	25	15 TO 55 SECONDS
	5-50	400	25	2 TO 7 SECONDS
	5-50	600	25	1 TO 3.5 SECONDS
AMBIENT EFFECT ON CALIBRATION	5	156	-40	NO TRIP (a)
	5	178	-40	1 HOUR, MAX
	7.5-50	148	-40	NO TRIP (a)
	7.5-50	165	-40	1 HOUR, MAX
	5	80	+71	NO TRIP (a)
	5	108	+71	1 HOUR, MAX
	7.5-50	70	+71	NO TRIP (a)
	7.5-50	114	+71	1 HOUR, MAX

(a) TESTING TIME 1 HOUR

DATA REQUIREMENTS	
MAXIMUM OPERATING FORCE: ON-OFF RESET	3 LB 7.5 LB
MAXIMUM OPERATING ALTITUDE	65,000 FT
MAXIMUM VOLTAGE DROP	0.3 VOLTS
MAXIMUM WEIGHT	0.2 LB

© INACTIVE FOR NEW DESIGN AFTER 7 DEC 1983

DASH NO.	CAPACITY AMPERES
-5	5
-7	7.5
-10	10
-15	15
-20	20
-25	25
-35	35
-50	50

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES, DECIMALS ± .031.

* 2. CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT AEEC AIR STD 12/3. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

© DENOTES CHANGES

APPROVED 21 JULY 1966 REVISED (A) 12 FEB 1980 (B) 7 APR 1986 (C) 7 DEC 83

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A.NAVY - AS Other Cust USAF-85 ARMY-ER	INTERNATIONAL INTEREST AEEC AIR STD 12/3 X	TITLE CIRCUIT BREAKER, AIRCRAFT TRIP-FREE TOGGLE, 5-50 AMP	MILITARY STANDARD MS25337(AS)
PROCUREMENT SPECIFICATION MIL-C-5809		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. W93 PROJECT NO. 5925-0147-9 PLATE NO. 14930

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.