This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for replacement use should be made from this document.

P.A. NAVY-AS

Other Cust: USAF-11 ARMY-EL

Procurement Specification: MIL-C-81703

International Interest:

TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, CLOSED STORAGE, WALL MTG FLANGE, PUSH-PULL COUPLING SERIES I AND II CONNECTORS

SUPERSEDES:

MILITARY STANDARD

MS 3135

SHEET 1 OF 1

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1761-13

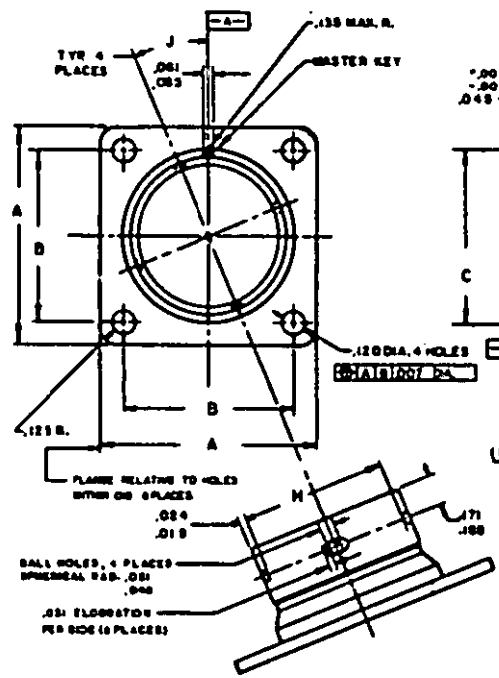

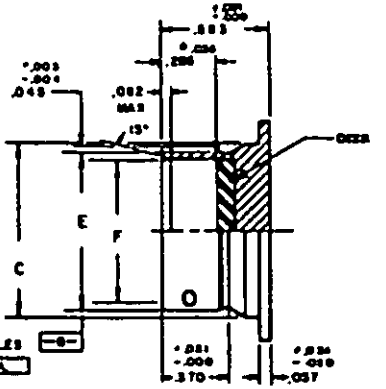

CLASS A
(FOR USE WITH SOCKET CONTACT PLUGS)



CLASS B
(FOR USE WITH PIN CONTACT PLUGS)

SHELL SIZE DASH NO. a	A MAX LENGTH SIDE	B BSC STD. CENTERS	C BSC DIA. FRONT	E +.006 -.004 SHELL O.D.	F +.003 -.007 SHELL I.D.	H +.010 -.005 BALL HOLE SPACING	J BALL HOLE LOCATION
-9	.896	.625	.370	.455	.384	.396	30°
-11	1.021	.719	.491	.570	.460	.531	
-13	1.114	.812	.629	.704	.621	.666	
-15	1.208	.906	.985	.843	.760	.804	22½°
-17	1.302	.968	1.156	.996	.913	.938	
-21	1.458	1.187	1.266	1.120	1.037	1.081	

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS ±.010, ANGULAR ±1/2°.
a A OR B (CLASS)

MATERIAL: SHELL ALUMINUM ALLOY CONFORMING TO MIL-C-81703.
DISH: CLOSED CELL NEOPRENE SPONGE PER MIL-C-833 CLASS 50 OR 90.
GASKET: SYNTHETIC RUBBER, MIL-STD-417 65±10 DUROMETER.

EXAMPLE OF PART NO.



THESE PARTS ARE INTENDED FOR USE AS HOLDING RECEPTACLES FOR STORAGE OF MS 3137, MS 3138, MS 3147 & MS 3148 PLUGS.

NOTES:
1. TRUE POSITION TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH MIL-STD-9.
2. DIMENSIONS LOCATING TRUE POSITIONS ARE BASIC.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

FED. SUP CLASS 5935

APPROVED 20 APRIL 1961 REVISED (A) 10 SEPT 1962 (B) 5 NOV 1963 (C) [illegible] 67. (D) 21 JULY 1971

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.