MILITARY SPECIFICATION SHEET

INTERCOMMUNICATION SETS, AN/AIC-14 AND AN/AIC-14A

FILTER MODULE

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the unit described herein shall consist of this document and the latest issue of specification MIL-I-22352(AS).

1. SCOPE

1.1 Scope.

This specification sheet provides performance and physical characteristics for the Filter Module used in master Interphone Control panel C-2645D/AIC-14A.

1.2 Military Part Number.

The military part number shall be M22352/10 -1

2. APPLICABLE DOCUMENTS

Refer to 2.2 of MIL-I-22352(AS) for a listing of applicable documents. The requirements specified herein shall have precedence over all referenced documents. The contract and its attachments shall have precedence over any specification or reference document.

3. REQUIREMENTS

3.1 Item Definition. The Filter Module shall provide smoothing of audio ripple present on the +27.5 Volt input power to the master Interphone Control panel C-2645D/AIC-14A.

3.1.1 Item Diagram. The Filter Module shall provide the functions represented schematically in accordance with the diagram of Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:05Z
Check the source to verify that this is the current version before use.

3.1.2 Interface Definition. The Filter Module input and output signals will normally display the characteristics presented in Table I.

TABLE I. Signal characteristics

Signal Name	Characteristics
Inputs:	
Power (PWR)	+27.5 ±0.5 Vdc
Outputs:	
Filtered Power (FILT PWR)	Not less than 1.0 V below PWR input
Grounds:	
Power (PWR GND)	Power return. See 3.4.4.2 of MIL-I-22352(AS).

3.2 Characteristics

3.2.1 Performance Characteristics

3.2.1.1 Input Characteristics

3.2.1.1.1 Power (PWR). The Filter Module shall accept and operate within the constraints of this specification when supplied with +27.5 ±0.5 Vdc electrical power as shown in the diagram of Figure 1.

3.2.1.2 Output Characteristics

3.2.1.2.1 Filtered Power (FILT PWR). The FILT PWR output shall have the following characteristics:

For frequencies from 300 to 7,000 Hz, the FILT PWR output shall demonstrate an attenuation of ripple of not less than 35 dB for output currents from 0 to 250 milliamperes. The average output voltage shall be no more than 1 volt below the input amplitude. The filter shall be capable of sustained operation at 250 ma current load without degradation of performance or damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:05Z
Check the source to verify that this is the current version before use.

3.2.2 Physical Characteristics

3.2.2.1 Dimensions. The Filter Module shall consist of a single encapsulated module having the dimensions of Figure 2. All outside dimensions shall be within ±0.03 inches of the nominal value shown.

3.2.2.2 Weight. The filter shall weigh no more than 2.0 ounces.

3.3 Design and Construction. The design and construction of the filter shall be in accordance with the requirements of 3.3 of MIL-I-22352(AS).

4. QUALITY ASSURANCE PROVISIONS

See MIL-I-22352(AS).

4.1 Responsibility for Tests and Inspections. See MIL-I-22352(AS).

4.2 Test Equipment. See 4.3.3.1 of MIL-I-22352(AS).

4.3 Test Methods.

4.3.1 Examination of Product. See 4.3.3.2.1 of MIL-I-22352(AS).

4.3.2 Operational Test. See 4.3.3.2.2 of MIL-I-22352(AS).

4.3.2.1 Ripple Reduction. Verify the requirements of 3.2.1.2.1.1 herein.

4.3.2.2 Voltage Drop. Verify the requirements of 3.2.1.2.1.1 herein.

Preparing Activity:
Navy - AS

Project No. 5831-N042-10

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:05Z
Check the source to verify that this is the current version before use.


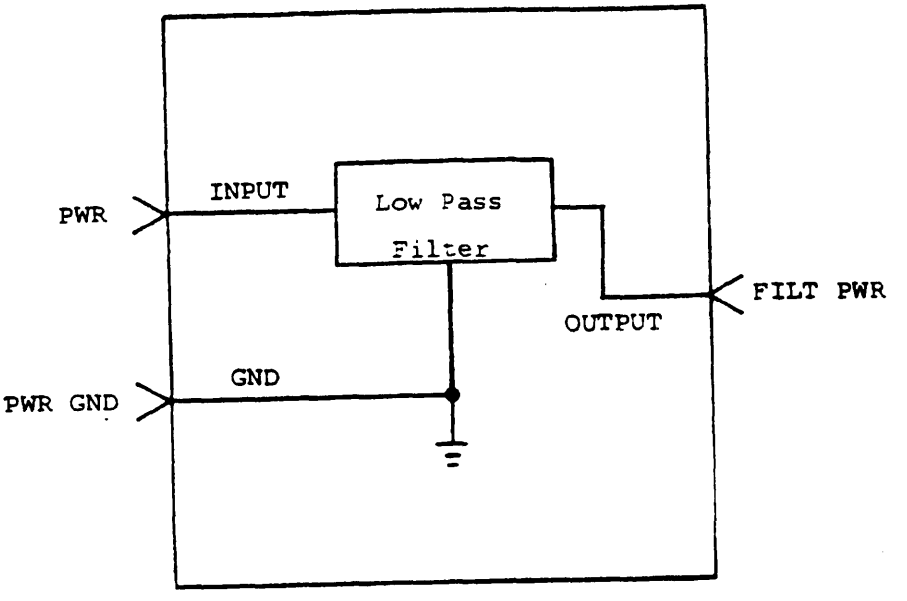


FIGURE 1. Filter module functional diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:05Z
Check the source to verify that this is the current version before use.

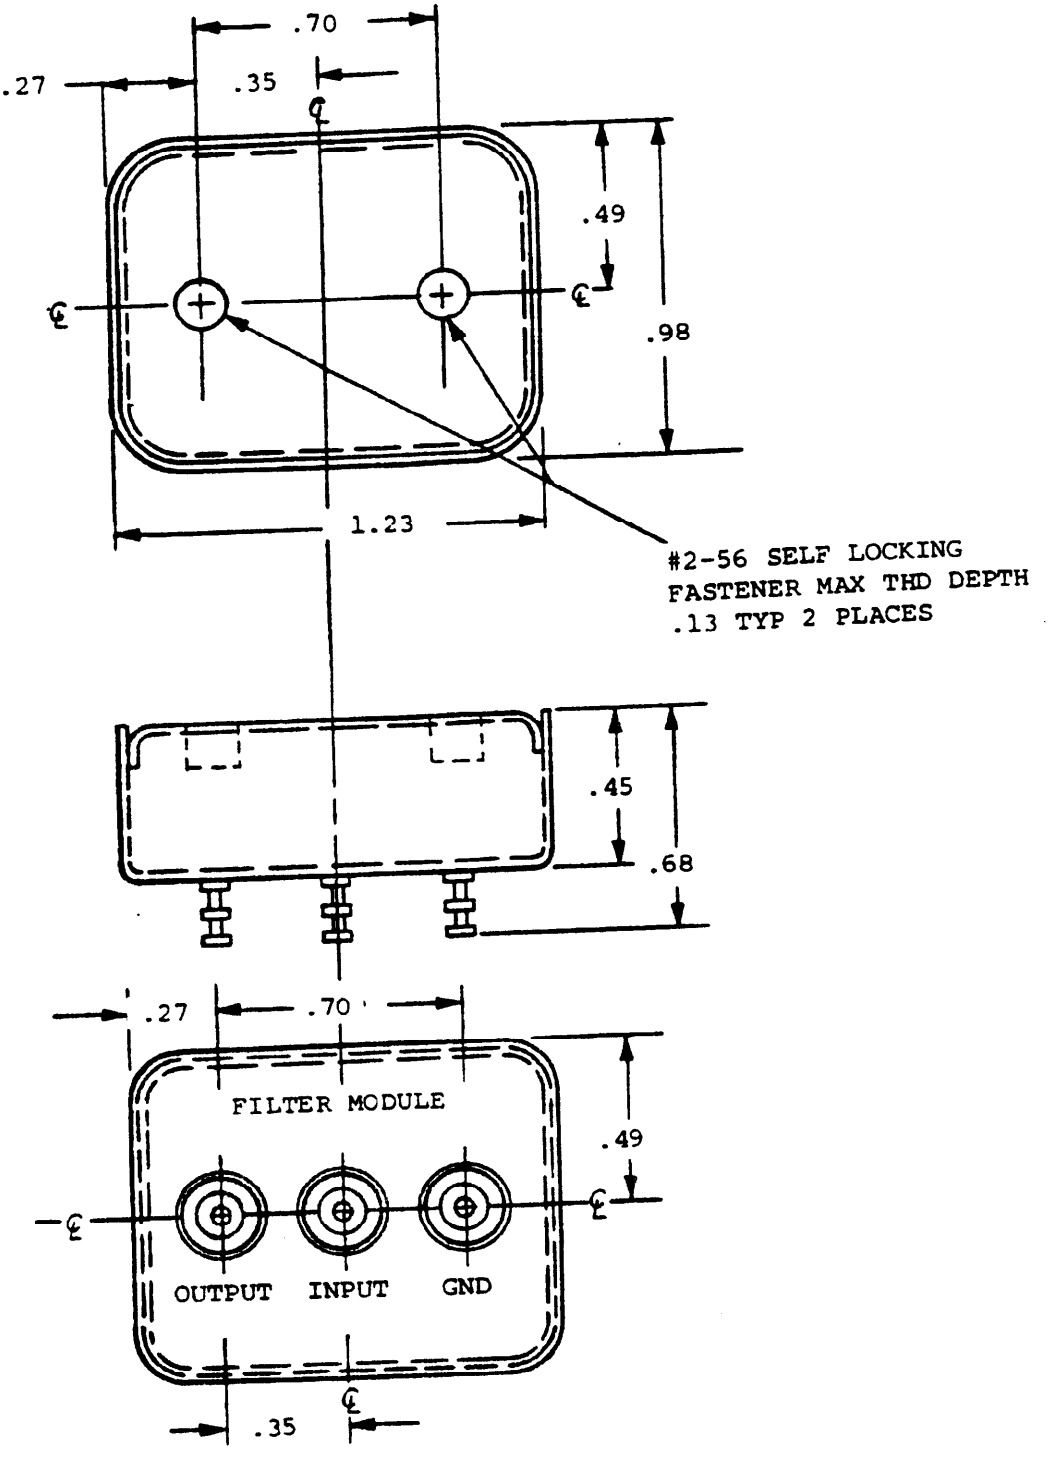

1/ All dimensions are in inches. Tolerances on dimensions are ±0.03 inches unless otherwise specified.

FIGURE 2. Filter module outline drawing.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:05Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-I-22352/10(AS)	INTERCOMMUNICATION SETS, AN/AIC-14 AND AN/AIC-14A FILTER MODULE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Of these tips to ensure positive tape

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:05Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department
(ESSD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON, D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Dept.
(ESSD), Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:05Z
Check the source to verify that this is the current version before use.