MILITARY SPECIFICATION SHEET

INTERCOMMUNICATIONS SETS, AN/AIC-14 and AN/AIC-14A

MASTER INTERPHONE CONTROL PANEL

C-2645B/AIC-14

Inactive for new design after 10 August 1984
For new design use MIL-I-22352/22(AS).

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the unit described herein shall consist of this document and the latest issue of specification MIL-I-22352(AS).

1. SCOPE

1.1 Scope. This specification sheet provides performance and physical characteristics of the active Interphone Control panel C-2645B/AIC-14, hereinafter referred to as C-2645B.

1.2 Military Part Number. The military part number shall be M22352/20 -1

2. APPLICABLE DOCUMENTS

Refer to 20 of MIL-I-22352(AS) Appendix A for a listing of applicable documents. The requirements specified herein shall have precedence over all referenced documents. The contract and its attachments shall have precedence over any specification or referenced document.

3.0 REQUIREMENTS

3.1 Item definition. The active Interphone Control panel C-2645B shall provide:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.

(1) Amplification of incoming interphone signals.
(2) Selection of the mode of operation of the associated microphone.
(3) Amplification of microphone audio for outgoing interphone signals.
(4) Two identical audio amplifiers, each capable of operation as an interphone amplifier or isolation amplifier.
(5) Capability to operate with degraded equipment in soft failure modes involving single amplifier operation or alternatively, by-passing the amplifiers completely.
(6) Current supply to power a microphone preamplifier or carbon microphone.
(7) Keyswitch dependent connection of microphone generated interphone signals to the interphone output.

3.1.1 Item diagram. The active Interphone Control panel shall provide the functions represented schematically in accordance with the diagram of Figure 1.

3.1.2 Interface definition. The active Interphone Control panel input and output signals will normally exhibit the characteristics presented in Table I.

3.1.3 SRAs. The C-2645B shall contain an audio amplifier which provides 43 ± 3 dB of voltage gain used in two places. Performance shall be in accordance with MIL-I-22352/2(AS). The Amplifier Module is used as an isolation amplifier and as an interphone amplifier.

TABLE I. Signal characteristics.

Signal Name	Characteristics
Inputs:	
Interphone (INTPH)	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from 0.01 to 0.1 Vac.
Microphone Audio (MIC AUDIO)	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from 0.1 to 18 Vac.
Split Interphone (SPLIT)	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from 0.01 to 0.1 Vac. No dc component normally present.
Auxiliary Interphone (AUX INTPH)	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from 0.01 to 0.1 Vac.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.

TABLE I. Signal characteristics-continued..

Signal Name	Characteristics
Inputs:	
Select Receiver (SEL RCVR) 0 to 15 Vac.	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from
Auxiliary CALL (AUX CALL)	Relay logic signal: 1) Open 2) Short to ground
Emergency Receiver No. 1 (EMER RCVR NO. 1) 0 to 15 Vac.	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from
Emergency Receiver No. 2 (EMER RCVR NO. 2)	Same as Emergency Receiver No. 1
Emergency Receiver No. 3 (EMER RCVR NO. 3)	Same as Emergency Receiver NO. 1
COLD Interphone Key (COLD INTPH KEY)	Relay logic signal: 1) Open 2) Short to ground
External Transmit Key (EXT KEY)	Relay logic signal: 1) Open 2) Short to ground
Interphone Control (INTPH CONTROL)	Relay logic signal: 1) Open 2) Short to ground
Power (PWR)	+27.5 ±0.5 Vdc
Panel Lights (LIGHTS)	+28 Vdc or Vac 400 Hz
Outputs:	
CALL, Emergency Override (CALL)	Relay logic signal: 1) Open 2) Short to ground
Transmit Key (XMIT KEY)	Relay logic signal: 1) Open 2) Short to ground
Split Interphone (SPLIT)	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from 0 to 1 Vac.
Interphone (INTPH)	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from 0.01 to 18 Vac.

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T12:07Z
Check the source to verify that this is the currentversion before use.

TABLE I. Signal characteristics - continued.

Signal Name	Characteristics
Outputs:	
Audio (AUDIO)	Voice range audio (300 to 6,000 Hz) signal ranging in amplitude from 0 to 1.0 Vac.
Auxiliary Mic Current (AUX MIC CUR)	50 ± 10 milliamperes
Grounds:	
Power (PWR GND)	Power return. See 3.4.4.2 of MIL-I-22352(AS).
System (SYS GND)	System return. See 3.4.4.3 of MIL-I-22352(AS).
Microphone Return (MIC RTN)	Signal return to system ground.
Headset Return (HDST RTN)	Signal return to system ground.

3.1.4 Controls. The following controls shall be located and suitably marked on the front panel:

3.1.4.1 Amplifier Selector (AMPL SEL). The AMPL SEL switch shall be a rotary four-position switch which shall determine the following modes of operation for the interphone and isolation amplifiers:

(1) Emergency Position (EMERG) - The emergency mode of operation is available to allow operation of radio receivers and transmitters in the event of a loss of primary power or total failure of some critical ICS assembly. When the emergency mode is selected, direct communication with other ICS stations is not available. The sidetone audio from the transmitters may be monitored by other ICS stations, permitting indirect station to station communications. In the EMERG position, both interphone and isolation amplifiers shall be electrically disconnected from the system. Audio from the associated microphone, or microphone circuit, shall be routed to the input of a selected transmitter, and the three emergency radio receiver outputs shall be connected directly to the associated headset.

(2) Normal Position (NORM) - During Interphone operation with the AMPL SEL switch in the NORM position, the interphone and isolation amplifiers shall function as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.

a. The interphone amplifier shall amplify the audio signal derived from the associated microphone, or microphone circuit, to a level sufficient both for use on the outgoing interphone line and for use as sidetone signal input to the isolation amplifier.

b. The isolation amplifier shall amplify signals derived from radio receivers, incoming interphone lines, and sidetone output of the interphone amplifier, delivering the audio output to the associated headset or headset circuit.

Provisions for Split headset operation shall also be incorporated in the interphone control unit. During Split headset operation with the AMPL SEL switch in the NORM Position, the interphone amplifier shall act as a second isolation amplifier with the same capabilities as the normal isolation amplifier except that the input signals and the output load shall be separate and independent. See 3.1.6.3 for a discussion of Interphone Relay function including Split headset and Interphone operation.

(3) Alternate One Position (ALT 1) - In the ALT 1 position, the interphone amplifier output shall be electrically disconnected from the system and the isolation amplifier shall accomplish both amplifier functions on a time-share basis, i.e., interphone signal amplification when the C-2645B is keyed for outgoing interphone signal operation and isolation amplifier at all other times. The overall change in gain in either the interphone or isolation amplifier modes resulting from this type of operation shall not exceed ±4 dB from gain characteristics during normal operation.

(4) Alternate Two Position (ALT 2) - In the ALT 2 position, the isolation amplifier output shall be electrically disconnected from the system and the interphone amplifier shall accomplish both amplifier functions on a time-share basis, i.e., interphone signal amplification when the interphone control unit is keyed for outgoing interphone signal operation and isolation amplifier at all other times. The overall change in gain in either the interphone or isolation amplifier modes resulting from this type of operation shall not exceed ±4 dB from gain characteristics during normal operation.

3.1.4.2 Microphone Selector Switch (MIC SEL). The MIC SEL switch shall be a three-position toggle switch which shall determine the following modes of microphone operation:

(1) COLD - The COLD position shall be a fixed switch position wherein the Active Interphone Control panel shall change from interphone operation (amplifying and providing interphone and headset audio outputs) to transmit mode (amplifying the microphone audio input and providing the output for driving associated radio transmitters as selected on the station

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:07Z
Check the source to verify that this is the current version before use.

Interphone Control panel) by actuation of the associated microphone keyswitch.

(2) HOT - The HOT position shall be a fixed switch position wherein the associated microphone, or microphone circuit, shall be capable of continuously activating the transmit mode.

(3) CALL - The MIC SEL switch shall have a spring loaded CALL position. Upon release, the MIC SEL switch shall return to the HOT position. In the CALL Position, the operation of the C-2645B shall be the same as specified above for the HOT position except that all interconnected ICS stations shall be activated to receive the outgoing interphone signal generated by this unit. To accomplish this requirement the CALLing station shall override the selection of HOT or COLD in circuits of interconnected ICS stations, disabling the transmit function of such stations.

3.1.4.3 Interphone Volume Control (INTPH VOL). The interphone volume control shall be a rotary type control, providing an adjustment range of 30 ± 3 dB. The amplitude of incoming radio receiver signals shall not be affected by more than ± 1 dB when the INTPH VOL control is adjusted throughout its range.

3.1.5 Indicators. The active Interphone Control panel shall provide two edge lighting panel lamps to enhance night vision. The lamps shall illuminate using red filters in accordance with MIL-L-25467. Input power may be range up to +28 Vdc or 6 Vac at 400 Hz. Accommodation for this power variation shall be made by user selection of lamps from Table II.

TABLE II. Front Panel bulbs.

Nomenclature	Power
MS25237A-327 MS25237A-328	+28 Vdc 6 Vac

The unit shall be capable of operating with either ac or dc lighting power source as permitted in MIL-C-7681. When ac power is used for panel lighting self susceptibility to the 400 Hz power source shall induce not more that 5 millivolts across any properly terminated output with the input circuits grounded.

3.1.6 Relay functions. The C-2645B shall provide the following relay functions.

3.1.6.1 Emergency Relay. When EMER is selected on the AMPL SEL switch, there are no provisions for direct station to station ICS communication. The Emergency Relay shall provide switching of the MIC AUDIO and EXT KEY inputs so that they are connected to the XMIT AUDIO and XMTR KEY outputs respectively. These outputs after passing through other station WRAs drive transmitters whose sidetone audio may be monitored by other ICS stations, permitting indirect station to station communications.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:07Z
Check the source to verify that this is the current version before use.

3.1.6.2 Key Relay. The Key Relay is used to connect the MIC AUDIO and EXT KEY inputs to the MIC AUDIO and XMTR KEY outputs when the microphone keyswitch is closed and the C-2645B is operating in NORM, ALT 1 or ALT 2.

3.1.6.3 Interphone Relay. The Interphone relay shall select between (1) Interphone operation and (2) Split Interphone operation. In Interphone operation, the C-2645B shall output INTPH and AUDIO signals derived from MIC AUDIO, INTPH, AUX INTPH, and SEL RCVR inputs. In Split headset operation, the C-2645B shall output the SPLIT audio signal derived from the SPLIT Input.

3.2 Characteristics

3.2.1 Performance characteristics. This section specifies the minimum performance requirements for each of the inputs, outputs, and functions of the active Interphone Control panel. Unless otherwise specified, selection of any function or mode of the active Interphone Control panel shall not compromise the performance of any input or output of the IC system.

3.2.1.1 Input characteristics. The inputs listed in Table I shall be provided having the following characteristics:

3.2.1.1.1 Interphone (INTPH).

3.2.1.1.1.1 Signal Frequency. The Interphone Signal input shall accept input drive signals which range from 300 to 6,000 Hz.

3.2.1.1.1.2 Signal Amplitude. The INTPH signal input shall accept input drive signals which range in amplitude from 0.01 to 18 Vac. The circuitry shall be capable of withstanding overvoltage inputs of up to 20 Vac without sustaining damage.

3.2.1.1.1.3 Input impedance. The impedance of the INTPH input shall be 600 ohms ± 10 percent.

3.2.1.1.2 Microphone Audio (MIC AUDIO).

3.2.1.1.2.1 Signal Frequency. The MIC AUDIO signal input shall accept input drive signals which range from 300 to 6,000 Hz.

3.2.1.1.2.2 Signal Amplitude. The MIC AUDIO signal input shall accept input drive signals which range in amplitude from 0.1 and 18 Vac. The circuitry shall be capable of withstanding overvoltage inputs of up to 1.00 Vac without sustaining damage.

3.2.1.1.2.3 Input Impedance. The impedance of the MIC AUDIO signal input shall be 100 ohms ± 10 percent.

3.2.1.1.2.4 Microphone Current. The MIC AUDIO input line shall be capable of supplying 50 ± 10 milliamperes to the microphone circuit for carbon microphones or as a source of power to equivalent dynamic microphone and associated preamplifier combinations.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:07Z
Check the source to verify that this is the current version before use.

3.2.1.1.3 Split Interphone (SPLIT).

3.2.1.1.3.1 Signal Frequency. The SPLIT signal input shall accept input drive signals which range from 300 to 6,000 Hz.

3.2.1.1.3.2 Signal Amplitude. The SPLIT signal input shall accept input drive signals which range in amplitude from 0.1 to 18 Vac. The circuitry shall be capable of withstanding overvoltage inputs of up to 100 Vac without sustaining damage.

3.2.1.1.3.3 Input Impedance. The impedance of the split Interphone signal input shall be 1,200 ohms ± 10 percent when the Interphone Relay is deenergized.

3.2.1.1.4. Auxiliary Interphone (AUX INTPH). The input characteristics of the AUX INTPH signal input shall be the same as described for the INTPH signal input of Section 3.2.1.1.1.

3.2.1.1.5 Select Receiver (SEL RCVR). The SEL RCVR input shall be applied directly to the amplifier of detail specification sheet MIL-I-22352/2(AS) which acts as an isolation amplifier. Also, the signal shall be routed to the interphone amplifier acting as the isolation amplifier when ALT 2 has been selected on the AMPL SEL control.

3.2.1.1.6 Auxiliary CALL (AUX CALL). The AUX CALL input shall be a relay logic signal having the following states (1) open and (2) short to ground. The AUX CALL signal shall be routed to the MIC SEL switch.

3.2.1.1.7 Emergency Receiver No. 1 Through Emergency Receiver No. 3 (EMER RCVE No. X. The EMER RCVR NO. 1 through NO. 3 signals shall be routed to the AUDIO output via the AMPL SEL switch when the EMERG position is selected.

3.2.1.1.8 COLD Interphone Key (COLD INTPH KEY). The COLD INTPH KEY input shall form a relay logic "OR" circuit with the INTPH CONTROL input having the following states (1) HI (greater than 26 Vdc) and (2) LO (less than 2 Vdc). The COLD INTPH KEY input shall be routed to the MIC SEL switch and to the lowside of the Interphone Relays.

3.2.1.1.9 External Transmit Key (EXT XMIT KEY). The EXT KEY signal is a relay logic drive signal having two states based on the position of the operator's keyswitch: (1) open and (2) short to ground. The signal shall be applied to the Key Relay through the AMPL SEL switch to activate the Key Relay function (See 3.1.6.2).

3.2.1.1.10 Interphone Control (INTPH CONTROL). The INTPH CONTROL input shall form a relay logic "OR" circuit with the COLD INTPH KEY input having two states: (1) HI (greater than 26 Vdc) and (2) LO (short to ground). The signal shall be applied to actuate Interphone relay circuitry (See 3.1.6.3) as necessary to comply with the performance specified herein. Signal current shall not exceed 100 ma.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.

3.2.1.1.11 Power (PWR). The C-2645B shall accept 27.5 ± 0.5 Vdc power. In NORMAL operation with the outputs driven to rated power, the input current shall not exceed 500 ma.

3.2.1.1.12 Panel Lights (LIGHTS). The C-2645B shall be capable of accepting power ranging up to +28 Vdc or 6 Vac to illuminate the two front panel lamps. The panel lamps used shall be selected from Table III in 3.1.5.

3.2.1.2 Output characteristics. The outputs listed in Table I shall be provided having the following characteristics:

3.2.1.2.1 Call, Outgo (CALL). The CALL output shall have two states: (1) open and (2) short to ground. The CALL output shall be connected to the AUX CALL input through the MIC SEL switch in the COLD position. A logic LO shall be output when the MIC SEL switch is in the CALL position.

3.2.1.2.2 Transmitter Key (XMTR KEY). The XMTR KEY output shall be a relay logic signal having two states (1) open and (2) short to ground. The XMTR KEY signal shall be a short to ground when transmitter keying is desired as evidenced by actuation of the microphone keyswitch causing a LO to appear at the EXT KEY input which in turn activates the Key Relay.

3.2.1.2.3 Audio (AUDIO). The source and therefore the characteristics of the AUDIO signal are a function of the position of the AMPL SEL switch and the Interphone Relays. The sources are shown in Table IV.

TABLE IV. Audio source list.

AMPL SEL	Interphone Relay State	Amplifier Used	Signal Source
EMER	Any	None	EMER RCVR No. 1, No. 2 and No. 3
NORM	Any	Isolation	INTPH, AUX INTPH, and SEL RCVR
ALT 1	Deenergized	Isolation	INTPH, AUX INTPH, and SEL RCVR,
ALT 1	Energized	Isolation	INTPH, AUX INTPH, SEL RCVR. MIC AUDIO and SPLIT
ALT 2	Deenergized	Interphone	INTPH, AUX INTPH, and SEL RCVR,
ALT 2	Energized	Interphone	INTPH, AUX INTPH, SEL RCVR, MIC AUDIO AND SPLIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.

3.2.1.2.3.1 Signal Frequency. The AUDIO output signal amplitude shall be in accordance with the response curves of Figure 2 when terminated in a 600 ohm resistive load.

3.2.1.2.3.2 Signal Amplitude/Gain. The EMER RCVR NO. 1, EMER RCVR NO. 2, and EMER RCVR NO. 3 signals shall be routed to the AUDIO without attentuation when EMERG is selected on the AMPL SEL control. The AUDIO output shall exceed a nominal input of 0.06 Vac at 1,000 Hz applied to the SEL RCVR input by 43 ±2 dB when the Interphone Relay is deenergized for NORM, ALT 1 and ALT 2 AMPL SEL switch selections. The AUDIO output shall exceed a nominal input of 0.06 Vac at 1,000 Hz applied to the AUX INTPH input by 43 ±2 dB, when the Interphone Relay is deenergized, for NORM, ALT 1, and ALT 2 AMPL SEL switch selections. The input/output characteristic (gain) of the amplifiers shall be flat within ±2dB when the input level is varied between 0.01 and 0.10 volts rms.

3.2.1.2.3.3 Distortion. The total harmonic distortion over the frequency range of 300 to 6,000 Hz and input amplitude range of 0.01 to 0.10V shall not exceed 5 percent under standard conditions as defined in of MIL-T-5422. The total harmonic distortion over the frequency range of 300 to 6,000 Hz shall not exceed 8 percent throughout the environmental envelope of MIL-E-5400 for Class 2 equipment when operated at rated power.

3.2.1.2.3.4 Output Power. The output of the interphone control panel shall be capable of delivering 300 milliwatts into a 600 ohm resistive load.

3.2.1.2.3.5 Output Stability. The output shall show no evidence of regeneration or oscillation throughout the environmental envelope of MIL-E-5400 for Class 2 equipment under any combination of input-output open, short, or complex impedance terminations. The C-2645B shall be capable of withstanding any combination of open/short circuit terminations without damage and resume operation within specification when properly terminated.

3.2.1.2.3.6 Internal Noise. The interphone control panel shall have an output of less than 5 millivolts when operated with the input shorted to signal ground throughout the environmental envelope of MIL-E-5400 for Class 2 equipment.

3.2.1.2.3.7 Susceptibility to Stray Magnetic Fields. The interphone control panel module shall be shielded or so designed that when oriented in any position within a magnetic field of 2 Gauss in the frequency range of 400 to 2,800 Hz, the output from each amplifier circuit when properly terminated shall not be greater than 10.0 millivolts at 400 Hz. Between 400 and 2,800 Hz the output shall not exceed a linear increase up to 50 millivolts at 2,800 Hz.

3.2.1.2.3.8 Output Impedance. The interphone control panel shall be capable of delivering the specified output power when terminated in a 600 ohm resistive load.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:07Z
Check the source to verify that this is the currentversion before use.

3.2.1.2.4 Split Interphone (SPLIT). The SPLIT output signal shall be an open circuit whenever the Interphone Relay is actuated. The Interphone Relay will be actuated by a logic LO (ground) input if any of the following conditions exist:

(1) INTPH CONTROL is logic LO input

(2) COLD INTPH KEY is logic LO input

(3) MIC SEL switch in the HOT or CALL position and the AMPL SEL switch in the NORM, ALT 1, or ALT 2 position and a logic HIGH at the EXT KEY input.

When the Interphone Relay is energized, the SPLIT output will be taken from the AMPL SEL switch.

3.2.1.2.5 Transmit Audio (XMIT AUDIO). The XMIT AUDIO output shall be obtained from the MIC AUDIO input after being routed through the Key Relay switching circuit. The MIC AUDIO output signal is identical to the MIC AUDIO input signal whenever a key command (ground) is received on the EXT KEY input or the AMPL SEL switch is set to the EMERG position.

3.2.1.2.6 Interphone (INTPH). The INTPH output shall be a function of the AMPL SEL switch. The source of the INTPH output shall be in accordance with Table VI.

TABLE VI. INTPH source list.

AMPL SEL	Interphone Relay State	Signal Source
EMERG	Deenergized	None
EMERG	Energized	None
NORM	Deenergized	INTPH, AUX INTPH
NORM	Energized	INTPH, AUX INTPH, and MIC AUDIO
ALT 1	Deenergized	INTPH, AUX INTPH, and MIC AUDIO
ALT 1	Energized	None
ALT 2	Deenergized	INTPH, AUX INTPH, and MIC AUDIO
ALT 2	Energized	None

3.2.1.2.7 Auxiliary Microphone Current (AUX MIC CUR). The AUX MIC CUR output into a 100 ohm load connected to system ground shall be 50 ±10 milliamperes.

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:07Z
Check the source to verify that this is the currentversion before use.

3.2.2 Physical characteristics.

3.2.2.1 Dimensions. The size of the unit is shown in Figure 3. All output dimensions shall be within ±0.03 inches of the nominal value shown.

3.2.2.2 Weight. The C-2645B shall weigh no more than 2.5 pounds.

3.3 DESIGN AND CONSTRUCTION

The design and construction of the active Interphone Control panel shall be in accordance with the requirements of 3.3 of MIL-I-22352(AS).

3.3.1 Front panel lighting. The front panel lamps shall be installed using mounting hardware having red filters in accordance with MIL-L-25867 to enhance night vision. The panel lamps shall be mounted in accordance with the outline drawing Figure 3. The lamp drive circuitry shall be capable of accommodating power ranging up to 28 Vdc or 6 V, 400 Hz ac power.

4. QUALITY ASSURANCE PROVISIONS

See MIL-I-22352(AS).

4.1 Responsibility for tests and inspections. See MIL-I-22352(AS).

4.2 Test plan. A detailed test plan will be submitted by the contractor for approval by the acquiring activity which details the tests to be performed in order to verify compliance with the performance characteristics specified in 3.2.1. The test plan will consider all of the inspections delineated in 4.2 of MIL-I-22352(AS).

4.3 Test procedures. Detailed test procedures will be submitted by the contractor for approval by the acquiring activity which will satisfy the requirements of the test plan of 4.2.

Preparing Activity:
Navy - AS

Project No. 5831-N042-20

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:07Z
Check the source to verify that this is the current version before use.


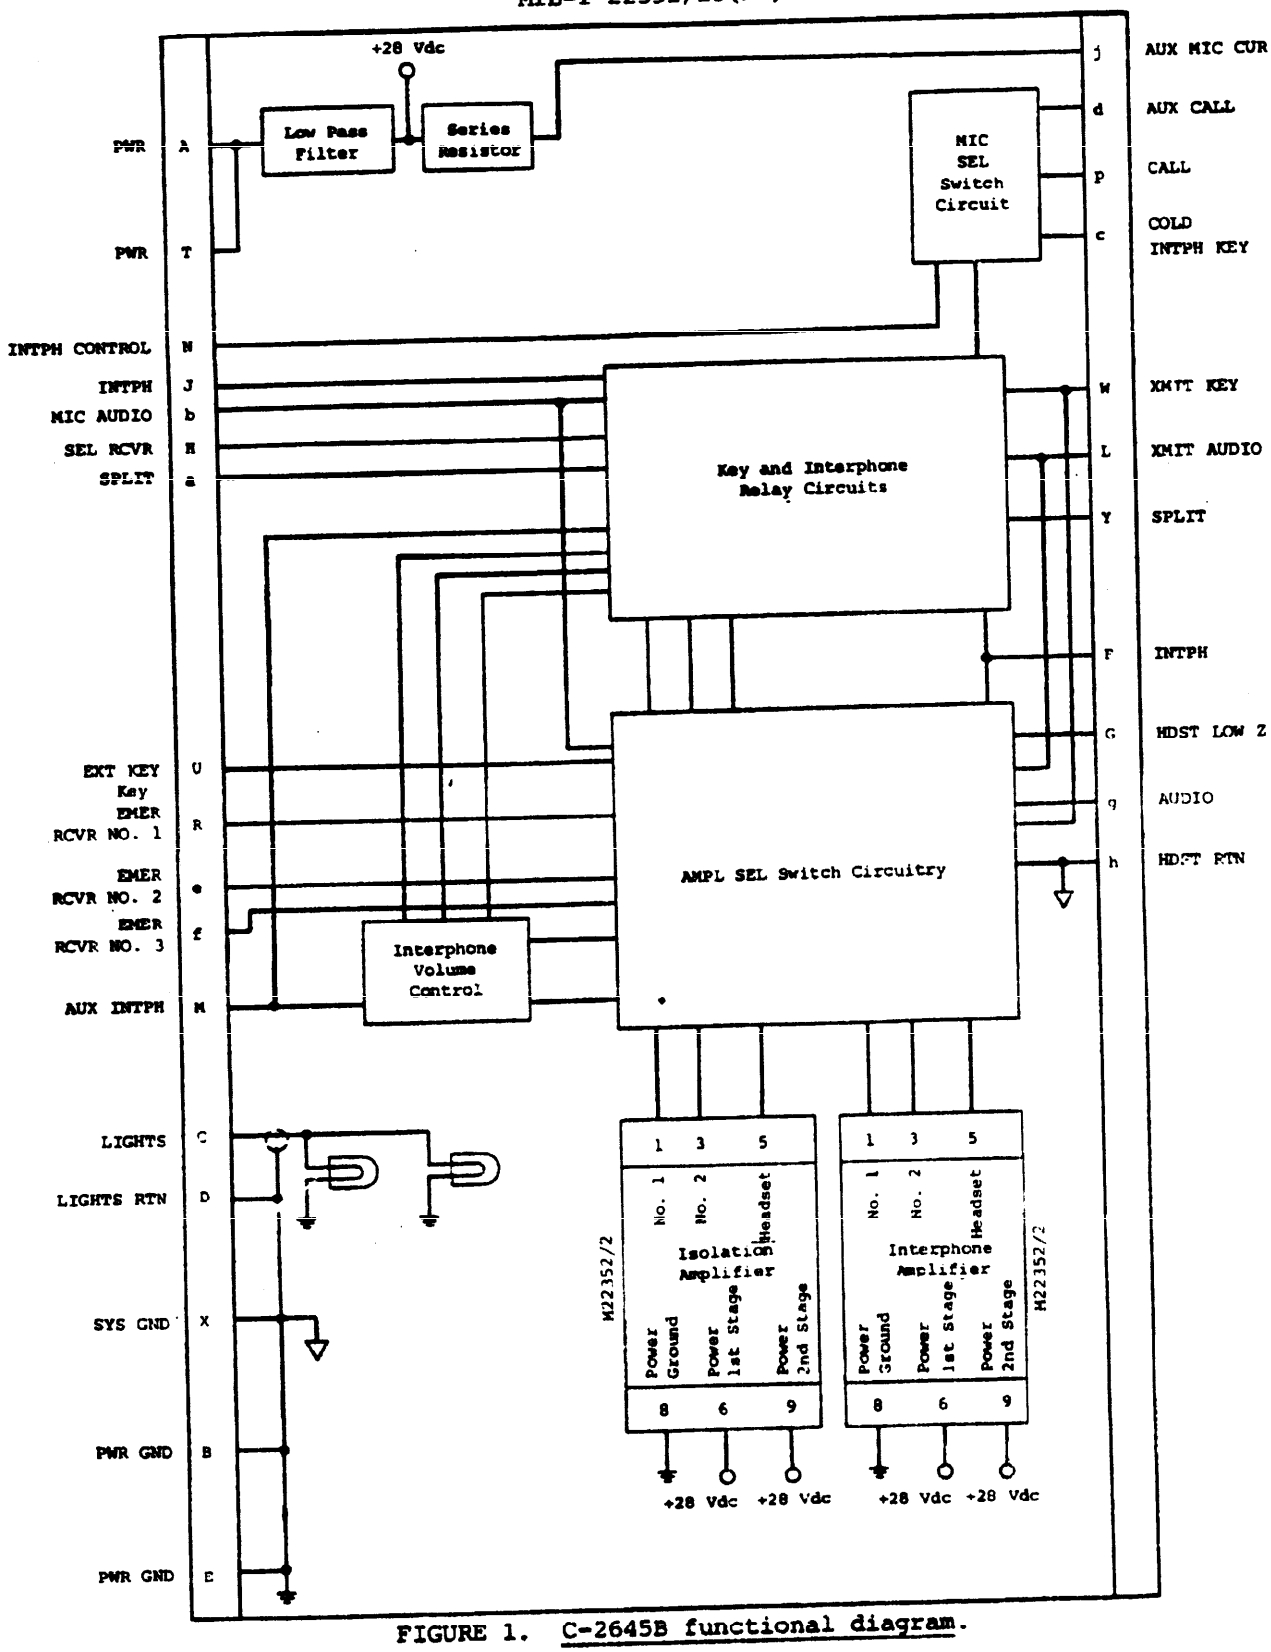


FIGURE 1. C-2645B functional diagram.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.

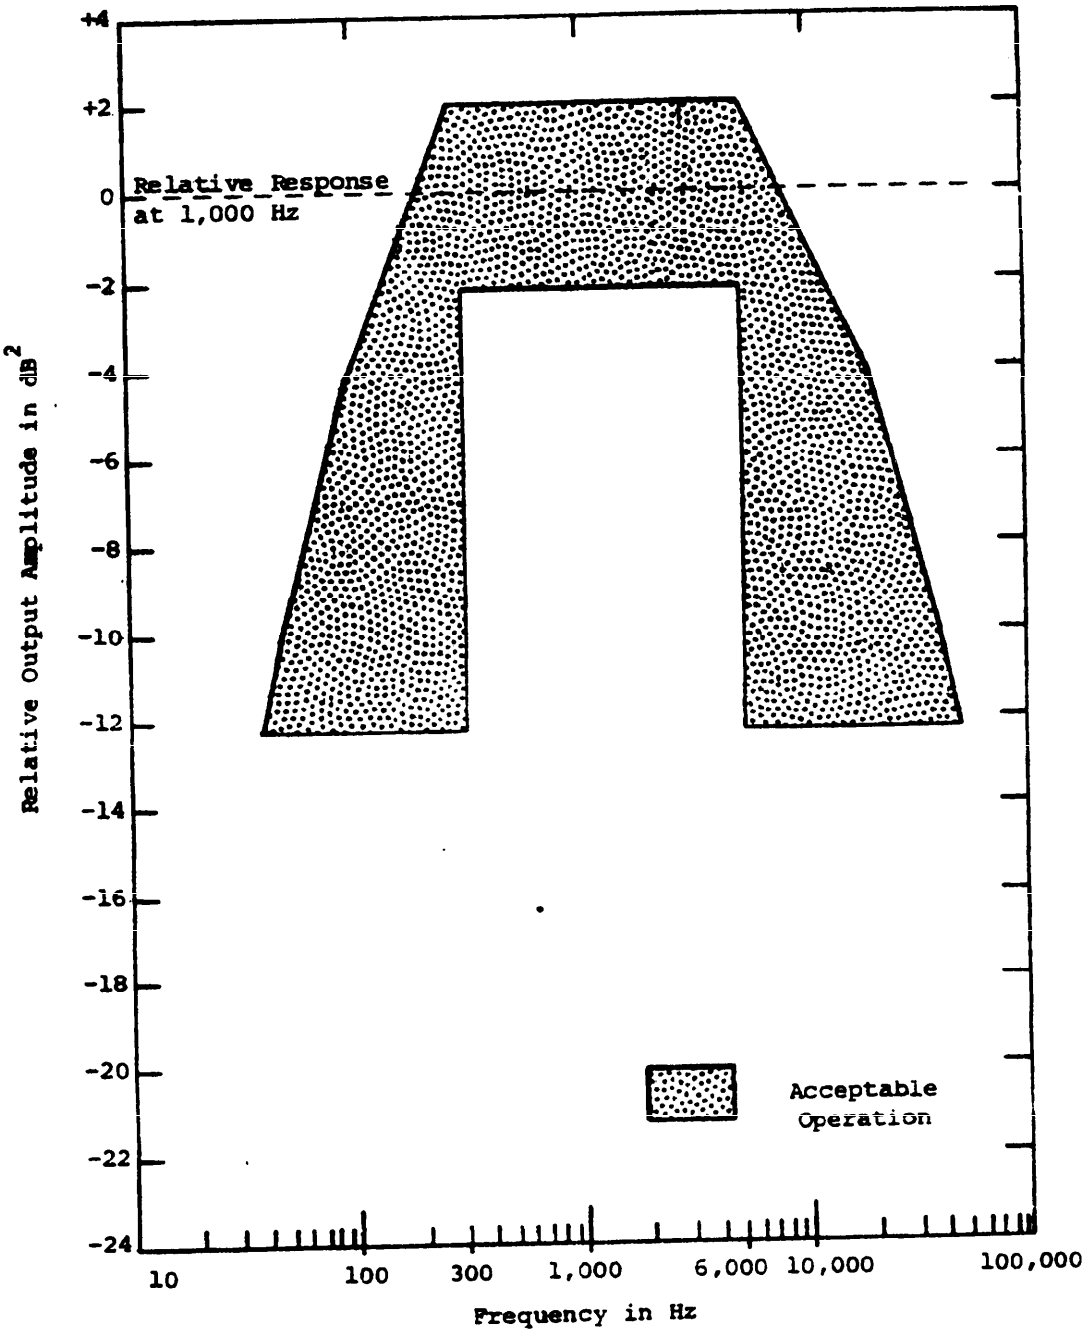

1/ Termination = 600 ohms for AUDIO output.
2/ Output amplitude is measured with respect to the amplitude at 1,000 Hz.

FIGURE 2. Output response curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.

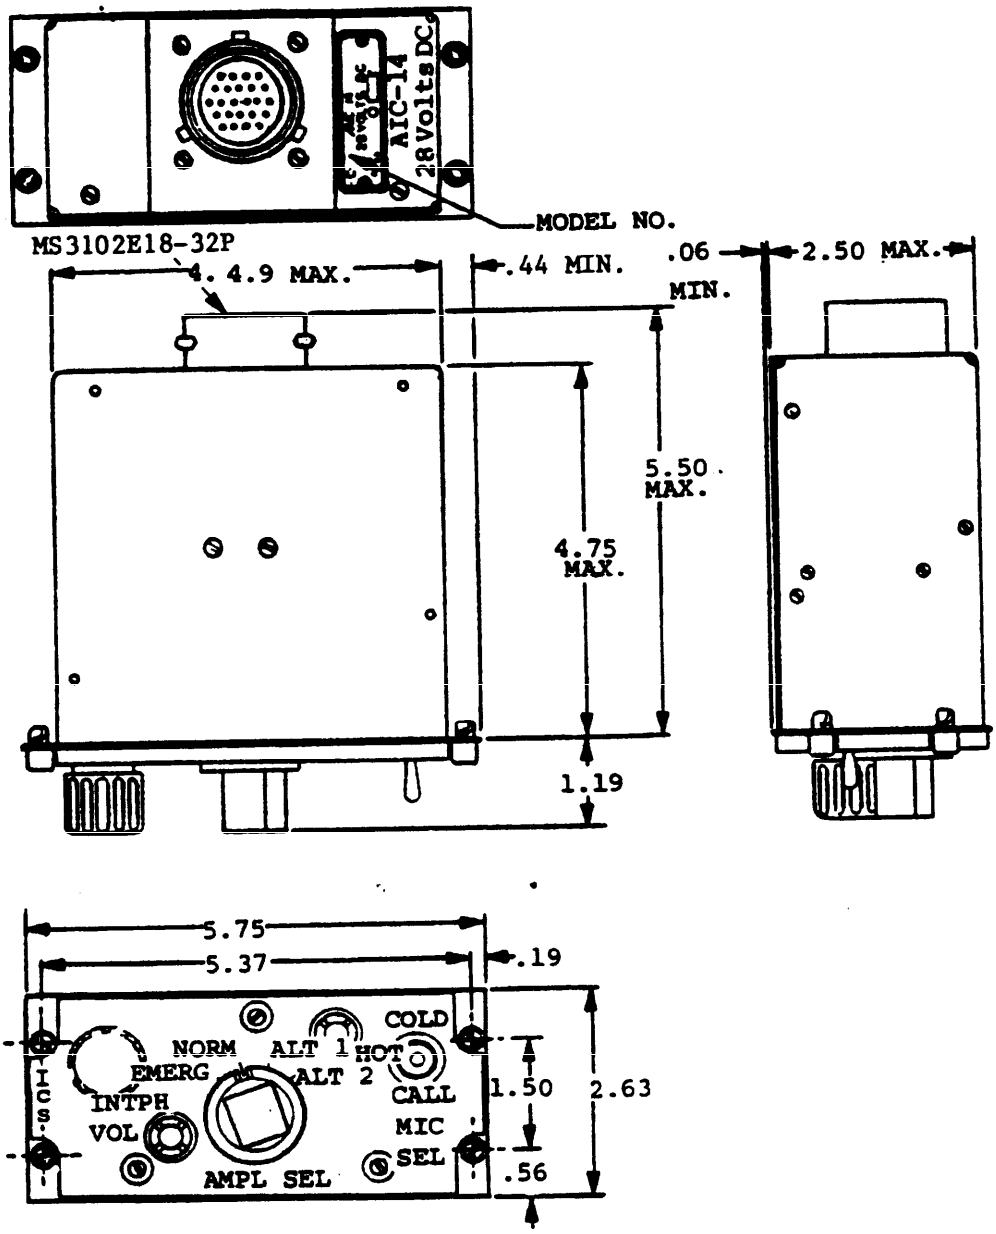

NOTE:

1. All dimensions are in inches. Tolerance on dimensions are ±0.03 inches unless otherwise specified.

FIGURE 3. C-2645B outline drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-I-22352/20(AS)	INTERCOMMUNICATIONS SETS, AM/AIC-14 AND AN/AIC-14A MASTER INTERPHONE CONTROL PANEL C-2645B/AIC-14

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION (Mark one)
	☐ VENDOR
	☐ USER
	☐ MANUFACTURER
	☐ OTHER (Specify):
b. ADDRESS (Street, City, State, ZIP Code)	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER (Last, First, MI) – Optional	b. WORK TELEPHONE NUMBER (Include Area Code) – Optional
c. MAILING ADDRESS (Street, City, State, ZIP Code) – Optional	8. DATE OF SUBMISSION (YYMMDD)

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T12:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department
(ESSD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Dept.
(ESSD), Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:07Z
Check the source to verify that this is the current version before use.