MILITARY SPECIFICATION SHEET

INTERCOMMUNICATION SETS, AN/AIC-14 AND AN/AIC-14A

LAMP DRIVER MODULE

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the unit described herein shall consist of this document and the latest issue of specification MIL-I-22352(AS).

1. SCOPE

1.1 Scope.

This specification sheet provides performance and physical characteristics for the Lamp Driver Module used in station Interphone Control panels C-4950/AIC-14A and C-4951/AIC-14A.

1.2 Military Part Number.

The military part number shall be M22352/5-1

2. APPLICABLE DOCUMENTS

Refer to 2.2 of MIL-I-22352(AS) for a listing of applicable documents. The requirements specified herein shall have precedence over all referenced documents. The contract and its attachments shall have precedence over any specification or reference document.

3. REQUIREMENTS

3.1 Item Definition. The Lamp Driver Module shall provide an output to sink lamp current to provide a visual indication of the "in use" status of other ICS stations , e.g., pilot, co-pilot. The Lamp Driver Module is used in station Interphone Control panels C-4951/AIC-14A and C-4950/AIC-14A.

3.1.1 Item Diagram. The Lamp Driver Module shall provide the functions represented schematically in accordance with the diagram of Figure 1.

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:04Z
Check the source to verify that this is the currentversion before use.

3.1.2 Interface Definition. The Lamp Driver Module input and output signals will normally display the characteristics presented in Table I.

TABLE I. Signal characteristics.

Signal Name	Characteristics
Inputs:	
Lamp Drive No. 1 through No. 5 (NO. X)	Voice range audio (300 to 7000 Hz) signal ranging in amplitude from 0 to 1 Vac.
Enable (ENABLE)	Binary logic: 1) greater than +26 Vdc 2) less than 2.0 Vdc
Power (PWR)	+27.5 ±0.5 Vdc
Outputs:	
Lamp Drive No. 1 through No. 5 (NO. X)	Current sinking capability providing variable intensity lamp illumination which is inversely proportional to input signal amplitude.
Enable (ENABLE)	Relay logic: 1) High impedance 2) Low impedance
Grounds:	
Power (PWR GND)	Power return. See 3.4.4.2 of MIL-I-22352(AS).
System (SYS GND)	Signal return. See 3.4.4.3 of MIL-I-22352(AS).

3.2 Characteristics

3.2.1 Performance Characteristics

3.2.1.1 Input Characteristics

3.2.1.1.1 No. 1. (NO. 1). The lamp driver NO. 1 shall accept signals from 300 to 7,000 Hz. The lamp driver shall accept input drive signals which range in amplitude from 0 to 10.0 Vac. The lamp driver shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:04Z
Check the source to verify that this is the current version before use.

capable of withstanding overvoltage inputs of up to 15.0 Vac without sustaining damage.

3.2.1.1.2 No. 2 through No. 5 (NO. X). The characteristics of inputs NO. 2 through NO. 5 shall be identical to those described for input NO. 1.

3.2.1.1.3 Enable (ENABLE). The ENABLE output shall be a switching circuit providing a high impedance when off and a low impedance when on. The output shall be capable of sinking 50 milliamperes of relay current and have a voltage drop of less than 2.0 Vdc in saturation.

3.2.1.1.4 Power (PWR). The lamp driver shall accept and operate within the constraints of this specification when supplied with +27.5 ±0.5 Vdc electrical power with respect to ground as shown in Figure 1. The maximum load presented by the Lamp Driver Module shall not exceed 200 milliamperes.

3.2.1.2 Output Characteristics

3.2.1.2.1 No. 1. (NO. 1). The lamp driver NO. 1 output shall be capable of continuously sinking at least 40 milliamperes of current sourced from +28 ±2 Vdc passing through a MS25237A-327 bayonet base lamp or 100 milliamperes of current from a diode rectified 6 V, 400 Hz source passing through a MS25237A-328 bayonet base lamp.

When installed, the lamps connected to the Lamp Driver Module shall radiate inversely proportional to the amplitude of the input to the associated lamp driver. The lamp driver shall be capable of maintaining the bulb at full brilliance indefinitely without damage.

3.2.1.2.2 No. 2 through No. 5. The characteristics of inputs NO. 2 through NO. 5 shall be identical to those described for output NO. 1.

3.2.2 Physical Characteristics

3.2.2.1 Dimensions. The Lamp Driver Module shall consist of a single encapsulated module having the dimensions of Figure 2. All outside dimensions shall be within ±0.005 inches of the nominal value shown.

3.2.2.2 Weight. The Lamp Driver Module shall weigh no more than 3.0 ounces.

3.3 Design and Construction. The design and construction of the amplifier shall be in accordance with the requirements of 3.3 of MIL-I-22352(AS).

4. QUALITY ASSURANCE PROVISIONS. See MIL-I-22352(AS).

4.1 Responsibility for Tests and Inspections. See MIL-I-22352(AS).

4.2 Test Equipment. See 4.3.3.1 of MIL-I-22352(AS).

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:04Z
Check the source to verify that this is the current version before use.

4.3 Test Methods

4.3.1 Examination of Product. See 4.3.3.2.1 MIL-I-22352(AS).

4.3.2 Operational Test. See 4.3.3.2.2 MIL-I-22352(AS).

4.3.2.1 Logic. Verify the logic requirements of 3.2.1.1 and 3.2.1.2 herein.

Preparing Activity:
Navy - AS

Project No. 5831-N042-5

Source: https://assist.dla.mil -- Downloaded: 202640-19T12:04Z
Check the source to verify that this is the currentversion before use.


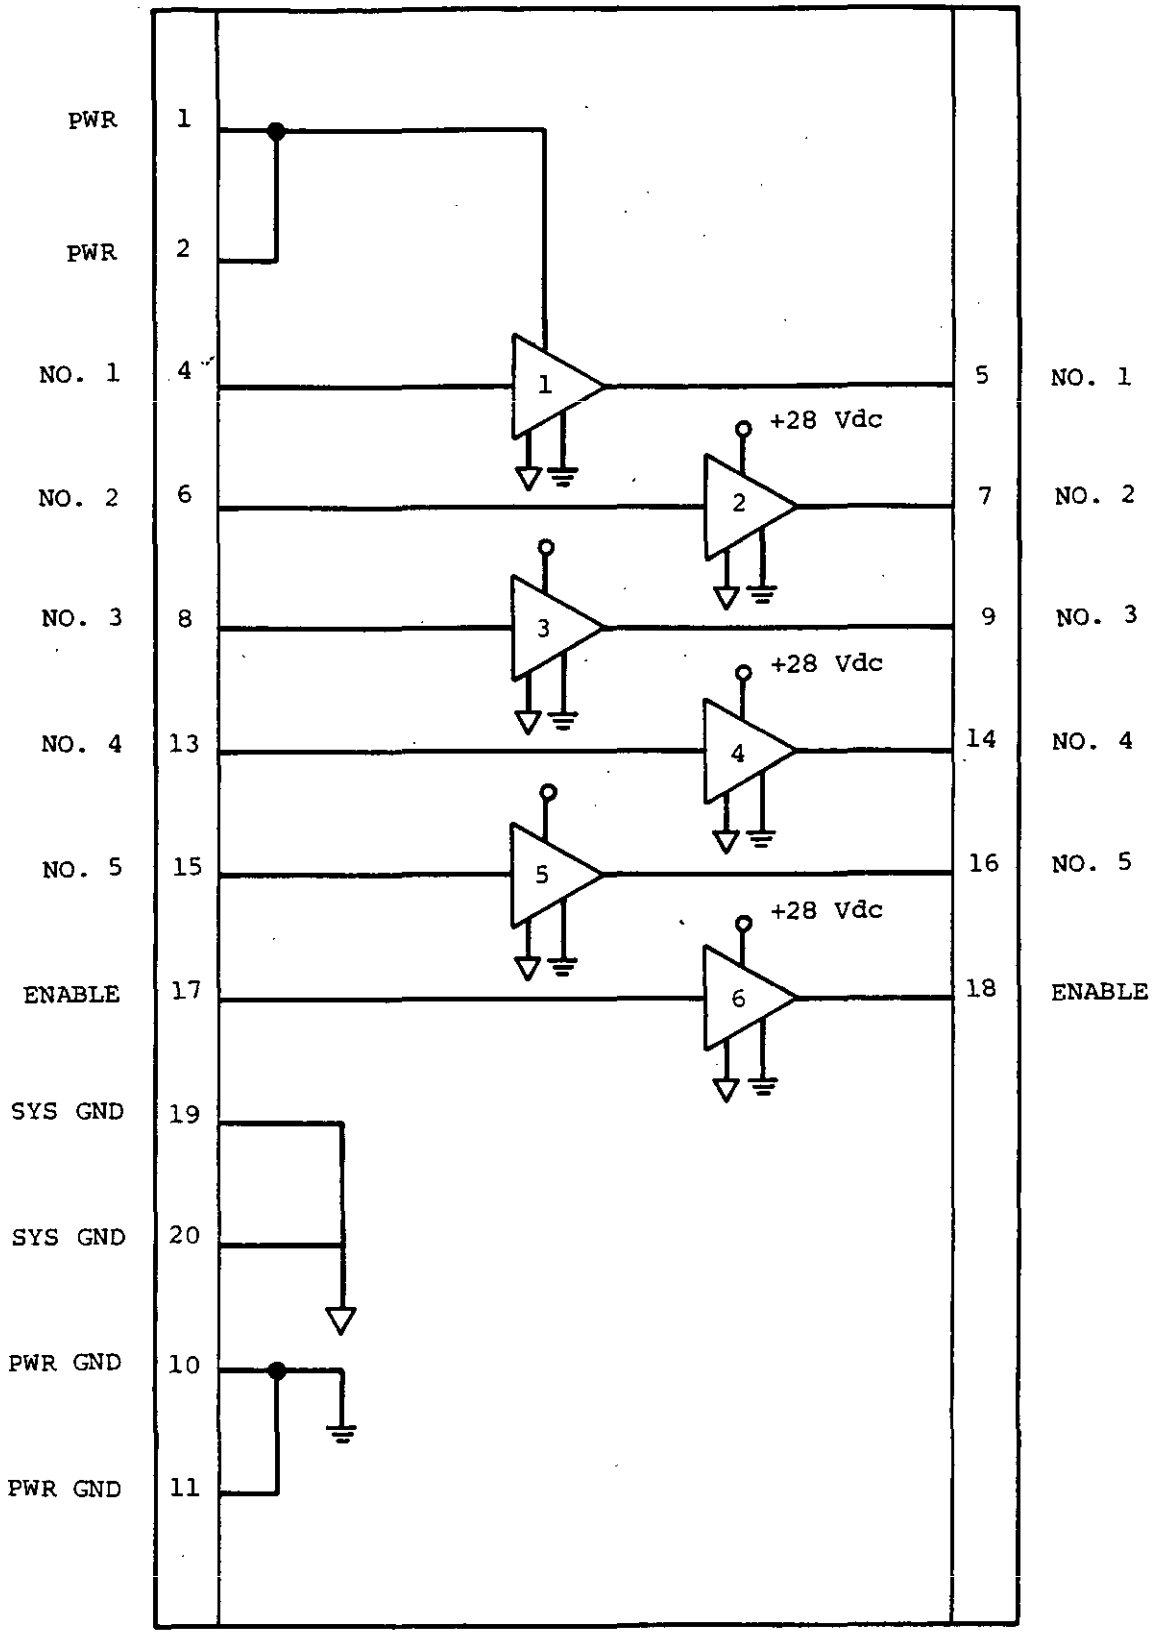


FIGURE 1. Lamp driver module functional diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:04Z
Check the source to verify that this is the current version before use.

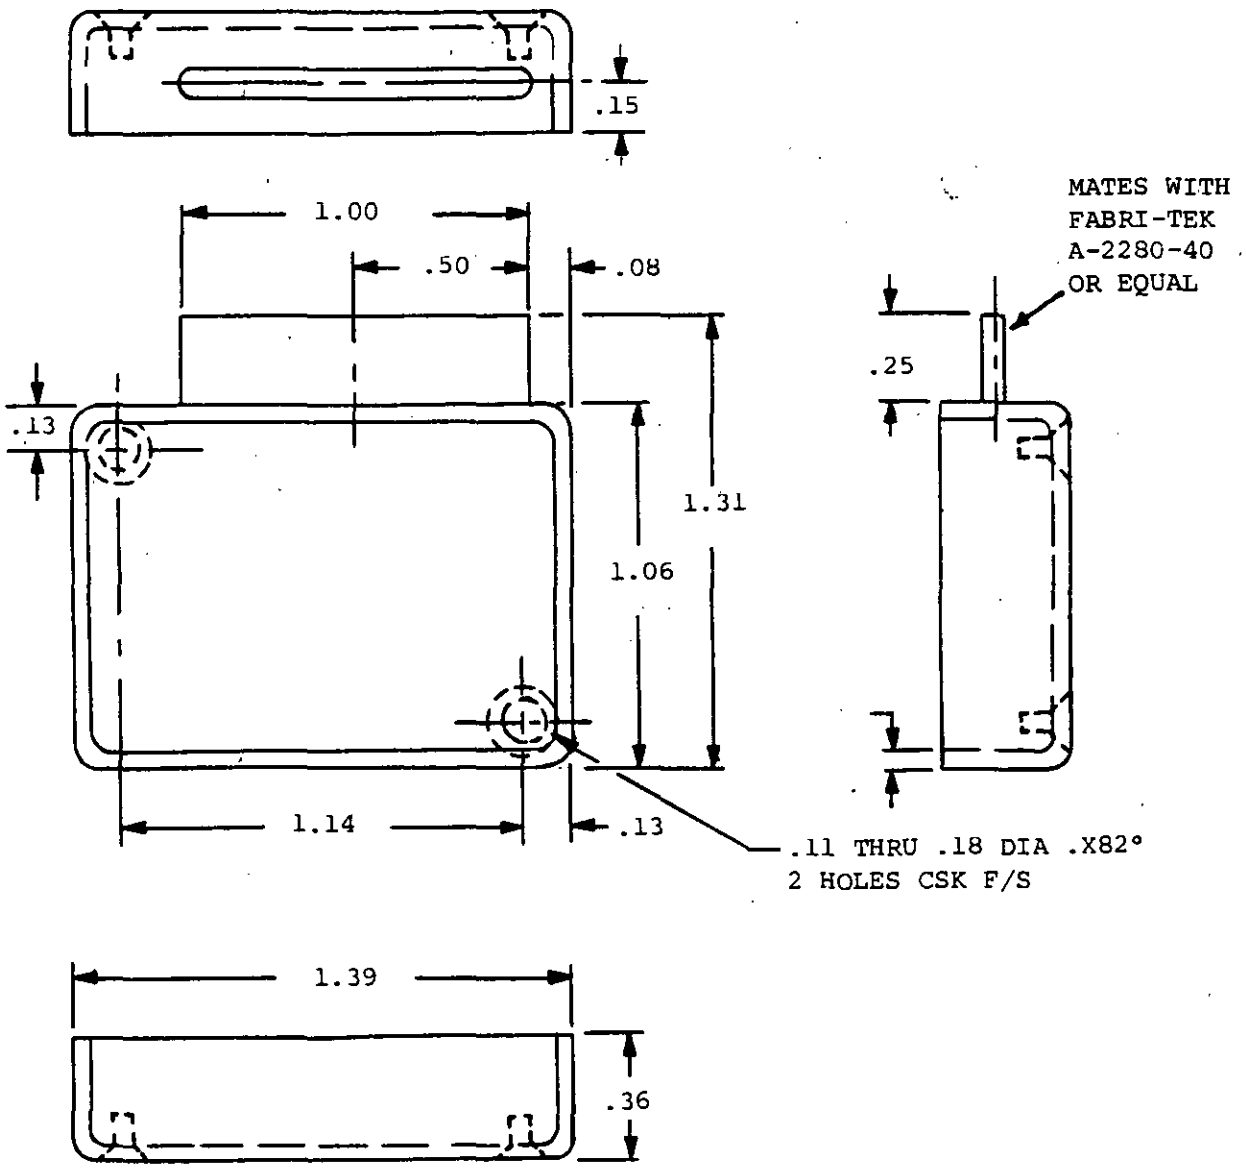

1/ All dimensions are in inches. Tolerances on dimensions are ±0.03 inches unless otherwise specified.

FIGURE 2. Lamp driver module outline drawing.

☆U.S. GOVERNMENT PRINTING OFFICE: 1984 — 705-040/A4179

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:04Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department
(ESSD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON, D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Dept.
(ESSD), Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-I-22352/5(AS)	INTERCOMMUNICATION SETS, AN/AIC-14 AND AN/AIC-14A LAMP DRIVER MODULE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:04Z
Check the source to verify that this is the current version before use.