MILITARY SPECIFICATION

POWER SUPPLY DIODE AND CAPACITOR ASSEMBLY

This specification has been approved by the Bureau of Naval Weapons, Department of the Navy.

1. SCOPE

1.1 Scope. - This specification describes the requirements for the procurement of one tyye of Power Supply Diode and Capacitor Assembly, BUWEPS LD-499703, designed to filter and regulate power supply voltages ranging from one (1) to seventy (70) volts. The Power Supply Diode and Capacitor Assembly BUWEPS LD-499703 consists of ten (10) tantalum electrolytic capacitors and five (5) diodes assembled on a printed wiring board. The capacitors are used to minimize cross modulation between amplifiers connected to common Power suPPly potentials of 15, 30, and 70 volts direct current. The diodes are part of two voltage regulator networks designed to stabilize amplifier bias voltages of 3 volts and 1 volt direct current,.

2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards) drawings, and publications, or such portion thereof as may be designated herein, of the issue in effect on the date of invitation of bids, form a part of this specification.

SPECIFICATIONS

FEDERAL

ppp-B-60l	Boxes, Wood, Cleated-plyWood
PPP-B-621	Boxes, WOOd Nailed and Lockcorner
PFP-B-636	Boxes, Fiber

MILITARY

MIL-P-114	Preservation, Methods of

FSC 1290

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

MIL-S-901	Shockproof Equipment, Class HI (High Impact) shipboard Application, Tests for
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-P-17555	Preparation for Delivery of Electronic, Electrical and Electromechanical Equipment and Associated Parts .
MIL-F-18870	Fire Control, Optical and Associated Equipment Intended for Shipboard Use, the General Specification for Design and Procurement of
MIL-W-21927	Weapons, Handling and Reparation for Delivery of; General Requirements for

STANDARDs

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-167	Mechanical Vibrations of Shipboard Equipmnt

DRAWINGS

NAVY DEPARTMENT

BUWEPS LD-499703	Power Supply Diode Assembly

PUBLICATIONS

BUREAU OF NAVAL WEAPONS

BUWEPS OS 6341	Miscellaneous General Ordnance Design Requirements

(Copies Of specifications, standards, drawings, and publication requested by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

2.2 Other **publications. - The following** documents form a part of this epecification. Unless otherwise indicated, the issue in effect on **date of invitation** for bids *shall* pply.

NATIONAL BUREAU OF STANDARDS PUBLICATIONS

Handbook H28 Screw-thread Standards for Federal Services

(Application for *copies* should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D.C.)

UNIFORM CLASSIFICATION COMMITTEE PUBLICATION

Uniform Freight Classification **Rules**

(Application for copies should **be** addressed to the Classification Committee, 202 UniOn Station, Chicago 6, Ill.)

AMERICAN TRUCKING ASSOCIATION, INC. PUBLICATION

Motor Freight Classification Rules

(Application for copies should be addressed to the Issuing Officer, American **Trucking** Association, *Inc.,* 1242 16th Street, N.w., Washington 6, **D. C.)**

3. REQUIREMENTS

3.1 General requirements.

3.1.1 Pre-production SampleS.- UnlesS otherWIse specified in the contract or order, pre-production samples of the Power Supply Diode and Capacitor Assembly Shall be manufactured by the methods and procedures proposed for the production lot. These samples Shall be **tested as specified in** section 4 herein and are for the purpose of determining **that the production item meets the requirements of this specification and the design. See 4.l.1.**

3.1.2 Materials.- Unless otherwise specified in the contract, requisition, or order, all **materials and purchased parts entering into the final assembly of** the **Power Supply Diode and Capacitor Assembly shall conform** to the detailed requirerments indicated on the **drawings and specifications** listed in BUWEPS ***LD-499703.***

3.1.3 **Finishes,** coatings, construction, and dimensions.- Finishes,

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

coatings, construction, and dimensions for the Power **Supply** Diode and Capacitor Assembly shall be in accordance with the applicable drawings, specifications, and publications listed in BUWEPS LD-499703.

3.1.4 Moisture, fungus, and corrosion. - The Power Supply Diode and Capacitor Assembly shall be rendered moisture, fungus, and corrosion resistant in accordance with detail requirements specified on drawings and specifications in BUWEPS LD-499703.

3.1.5 Marking. - Marking of assemblies, and sub-assemblies, and parts shall be in accordance with the applicable drawings listed in BUWEPS LD-499703 .

3.1.6 Interchangeability. - Component parts of the assembled units (unless otherwise specified on the applicable drawings) fabricated in accordance with their applicable drawings shall be interchangeable and shall assemble with mating components **of** the unit without selection or fitting. If, during assembly of the fabricated parts of a unit, selection or fitting is required, then changes in dimensions are necessary, and revision and correction of the applicable drawings is required. See 3.1.10.

3.1.7 Gages. - The contractor shall provide himself with whatever gages are necesssary and adequate to ensure that **the** materials to which this specification applies will meet the requirements shown on the applic**able** drawings. If so stipulated in **the** contract, order, or requisition, the Governnment will furnish drawings of pertinent **Navy Final** Inspection Gages for guidance in the design of the contractor's **inspection gages.** However, such procedure shall not relieve the contractor of his responsi**bility in the** design **and** manufacture of **such gages as** maybe required for the satisfactory fulfillment of the contract requirements, but is intended to facilitate acceptance of all components and assemblies by Navy Final Inspection Gages.

3.1.8 Threads. - Unless otherwise specified, all threads shall be In accordance with the National Bureau of Standards Handbook H28. The class or **fit for threads shall be as specified on the applicable drawings, and the NOT-GO gaging practice shall be as set forth in the Handbook** H28.

3.1.9 Requests for deviation. - Each request that a deviation be authorized shall have been submitted to the Procuring Activity, and the deviation shall have been authorized by the Bureau of Naval Weapons or by a Naval Activity delegated such authority, prior to the production of the affected item, or prior to the performance of a particular operation on **the** item. The deviation shall apply only to this specific item or operat ion. The request shall define the suggested deviation in sufficient detail to permit the Procuring Activity to evaluate its effect on performance

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

and reliability and the reasons for the suggested deviation shall be stated. Each request that a deviation be authorized, and the authorization, shall state specifically the extent of the departure, the identifying number of the Item, the contractor (or bidder) and the contract number. A deviation is essentially temporary in character, and usually represents a departure limited to a specific period, to a specific number of items, or to the contract to which it applies. It may require an equitable reduction in contract price if a decrease in the cost of performance results therefrom.

3.1.10 Conflicting requirements. - Conflicting requirements arising between this specification and any specification, publication, or drawing listed herein shall be referred in writing to the procuring agency or appointed agent for interpretation, clarification, and resolution (or correction).

3.2 Definitions. - Definitions applicable to the environmental requirements of this specification are as follows:

3.2.1 Tropical environment is defined as conditions of high humidity, high temperature, and spore exposure, which present an opportunity for fungi growth.

3.3 Performance requirements and product characteristics. - The Power Supply Diode and Capacitor Assembly shall meet **the following performance** requirements and product characteristics:

3.3.1 Continuity. - **When** measured in accordance with 4.4.4.1, the resistance between the case of each capacitor and the common return shall be less than 0.2 ohms.

3.3.2 Dielectric leakage resistance. - When measured in accordance with 4.5.4.2, the dielectric leakage resistance of each capacitor shall be greater than 1 megohm.

3.3.3 One-volt regulator. - When the one-volt regulator is tested in accordance with **4.4.4.3,** the ammeter reading shall be between 0.40 and 1.15 **amperes.**

3.3.4 Three-volt regulator. - When the three-volt regulator is tested in accordance with 4.4.4.4, the milliammeter reading shall be between 24 and 108 milliamperes.

***3.4* Environmental requirements. - The Power Supply Diode and Capacitor Assembly** shall meet the other applicable requirements of this specification during or after tests defined or specified in 4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

3.4.1 Vibration, operating condition. - The Power Supply Diode and Capacitor Assembly shall withstand the Type I vibration requirements specified in Standard MIL-STD-167, shall function during and after vibration tests, and thereafter shall show no damage and shall meet all the performance requirements and product characteristics of this specification. See 4.5.1.

3.4.2 Vibration-transportation. - The Diode and Capacitor Assembly after being subjected to the tests specified in 4.5.2 shall show no damage and shall reset all the requirements of section ***3.***

3.4.3 **Shock,** non-operating condition. - The Power Supply Diode and Capacitor Assembly ***shall*** withstand the Type A shock requirements specified in Spification MIL-S-9ol, and thereafter shall show no damage and shall meet all the performance requirements and product characteristics of this Specification **.**

3.4.4 Shock transportation, storage and handling. - The **Diode and CapaCitor** Assembly after being subjected to the tests specified in 4.5.4 shall show no damage and shall meet all the requirements of section **3.**

3.4.5 Temperature

3.4.5.1 Temperature, operating condition. - The Power **Supply Diode and Capacitor Assembly shall withstand operational ambient temperatures of beween zero degrees Fahrenheit (minus** 18 degrees centigrade) and 185 degrees Fahrenheit (85 degrees centigrade) in accordance with Specification **mIL-F-18870,** shall function during and after temperature tests, and thereafter shall show no damage or corrosion and shall meet all the performance requirements and product charactertstics of this specification.

3.4.5.2 Temperature, non-operating condition. - The Power SupplY Diode and Capacitor Assembly shall withstand storage tempe ratures of between minus 4O degrees Fahrenheit (minus 40 degrees centigrade and 160 degrees Fahrenheit (71 degrees **centigrade) in accordance with Condition II of OS 6341, and thereafter shall show no corrosion or damage and shall meet all the performance requirements and product characteristics of this specification.**

3.4.6 Humidity. - The Power Supply Diode and Capacitor Assembly shall withstand operational ambient humidities in accordance with Specification MIL-F-18870, and thereafter shall show no corrosion or damage and shall meet all the performance requirements and product characteristics of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

3.4.7 Tropical environment. - The Power Supply Diode and Capacitor Assembly shall withstand the tropical environmental conditions specified in Specification MIL-E-5272 under Fungus Resistance Tests", and thereafter shall show no fungus growth, corrosion, or other damage, and shall meet all the performance requirements and product characteristics of this specification.

3.5 Clean-up. - Prior to and after final assembly, all parts, components and the assembly shall be thoroughly cleaned of loose, spattered, or excess solder, metal chips, and other foreign matter. Burrs and sharp edges, as well as rosin flash, shall be removed.

3.6 Workmanship. - The equipment, including all parts and accessories shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attentIon shall be paid to neatness and thoroughness of soldering, marking of parts and assemblies, riveting, machine screw assemblage", and freedom of parts from burrs and sharp edges.

3.6.1 The workmanship exhibited in the pre-production samples will be evaluated to determine acceptability. The approved standards of workmanship will thereby become a minimum production requirement for all units offered for acceptance.

4. *Quality ASSURANCE* PROVISIONS

4.1 Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection re - quirements specified herein. Except as otherwise spec if led, the supplier may utilize his own facilities or any conmercial laboratory ac - ceptable to the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Pre-production sample. - Unless otherwise specIfied for each contract or order, a representative sample of three Power Supply Diode and Capacitor Assemblies shall be manufactured by the methods and procedures proposed for the production lot. These shall be submitted for pre-production tests at an activity designated by the Bureau of Naval Weapons, for purposes of determining compliance with the requirements of the contract, specIfications, and drawings. Further production of the item by the contractor prior to approval of the contracting *activ-* ity or the completion of tests *on* the pre-production samples shall be at the contractor's risk. Pre-production samples accepted will be **applied as part of the quantIty specified by the contract or order, but shall not be used in any equipment manufactured for the Government.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

4.1.2 Periodic production samples. - Unless otherwise specified by the procuring agency the tests of 4.4. and 4.5 shall be evaluated as follows:

Step 1. - Upon initiation of production, select one (1) unit from each group of ten (10) units for submission to an activity designated by the procuring agency.

Step 2. - Upon satisfactory compliance of each unit from three (3) consecutive groups, select one (1) unit from each group of twenty-five (25) units .

Step *3.* - Upon satisfactory compliance of each unit from three (3) consecutive groups, select one (1) unit from each group of fifty (50) units. Continue this procedure until a defective unit is found.

Step **4**$_0$ - When **a defective unit is found in any group, the group represented by the sample shall be rejected. Shift to Step 1 and proceed as indicated.**

4.2 Classification of' test. - The inspection and testing of the **Power Supply Capacitor** and Diode Assembly shall be **classified as follows:**

4.2.l **Acceptance tests. - These tests shall be accomplished on each Power Supply** Capacitor and Diode Assembly submitted for acceptance under contract. These tests are detailed in 4.4.

4.2.2 Pre-production and periodic production tests. - Pre-production and periodic production tests shall be accomplished on samples selected as specified In 4.1.1 and 4.1.2, which are representative of the production of **the Power** Supply **Capacitor and Diode Assembly after the award of the contract, to determine that the production meets the requirements of this Specification. These tests are detailed In 4.5. Acceptance shall be based on no defects In the sample. Failure of the sample to comply with these requirements will result in the rejection of the lot or the cessation of production, as determined by the procuring activity.**

4.2.3 Tests after delivery. - **Unless otherwise specified in the contract,** the Government reserves the right to conduct any or all the tests specified herein, as deemed necessary, after installation of the Power Supply capacitor and Diode Assembly. Any defects discosvered during or after these tests due to the contractor's failure to comply with drawings or specifications for this equipment shall **be corrected by the contractor at no expense to the Government, provided the contractor is notifled of such defects wlthin the guarantee** period of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

4.3 Test equipment. - The following items of test equipment are required to perform the acceptance tests set forth in this specification:

4.3.1 Power supply. - A direct-current power supply having the following characteristics:

(a) Voltage. - **27 plus** or minus 3 volts,

(b) Current. - 1.5 anperes minimum.

4.3.2 Meters.

4.3.2.1 Voltmeter. - A multi-range, direct-current voltmeter, 1 **and 3 volts full scale,** having an input impedance of at least 1000 ohms per volt, and an accuracy of plus or minus 2 percent of full scale.

4.3.2.2 Milliammeter. - A direct-current millimmeter, 150 milliamperes **full** scale, having an internal resistance not greater than 1 ohm, and an accuracy of plus or minus 2 percent of full scale.

4.3.2.3 Ammeter. - A direct-current ammeter, 1.5 amperes full scale, having an internal resistance not greater than 0.1 ohm, and an accuracy of plus or minus 2 percent of full scale.

4.3.2.4 Ohmmeter. - A multi-range ohmmeter capable of' measuring resistance in the neighborhood of 1 megohm with an accuracy of plus or minus 10 percent, and having a mid-scale deflection correspond- to not more than 15 ohms **on** the lowest resistance scale. The voltage of the internal direct-current voltage source of the ohmmeter shall not exceed 15 volts on any resistance scale.

4.3.3 Resistors.

4.3.3.1 R_1. - Resistor, fixed, wire-wound, 22 ohms, 50 watts minimum.

4.3.3.2 R_2. - Resistor, variable, wire-wound, 50 ohms, 100 watts minimum.

4.3.3.3 R3. -Resistor, fixed, wire-wound, 220 ohms, 7 watts minimum.

4.3.3.4 R4 . - Resistor, variable, wire-wound, 1000 ohms, 25 watts minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

4.4 Acceptance tests.

4.4.1 The contractor shall conduct acceptance tests as specified in 4.2.1, to assure that the Power Supply Diode and Capacitor Assembly is in compliance with the requirements of 3.1, 3.3, 3.5, and 3.6.

4.4.2 Test conditions. - Unless otherwise specified, the Power Supply Diode and Capacitor Assembly shall be subjected to acceptance tests under the following conditions:

4.4.2.Temperature : Room ambient 65 to 95 degrees Fahrenheit (18 to 35 degrees centigrade).

4.4.2.2 Altitude: Normal ground atmospheric pressure.

4.4.2.3 Vibration: None.

4.4.2.4 Humidity: Room ambient to 95 percent relative maximum.

4.4.3 *Test* and Inspection equipment and facilities. - The manufacturer shall furnish and maintain all necessary test equipment, facilities, and personnel for performing all acceptance tests. The test equipment shall be adequate in quantity, and unless definite requirements are specified, shall be of sufficient accuracy and quality to permit performance of the required **acceptance tests.**

4.4.4 Test procedure. - The detailed test procedure listed in the following paragraphs shall be followed:

4.4.4.1 Continuity. - The resistance between the case of each capacitor (Cl through C10) and the common returns (pins A and S) shall be measured with the ommeter of 4.3.2.4, to determine compliance with the requirements of 3.3.1.

4.4.4.2 Dielectric leakage resistance. - The reSiStance between each of pins C, D, E, F, H, J, P, R, and the common return (pins A and S) shall be measured With the ohmmeter of 4.3.2.4 to determine compliance with the requirements of 3.3.2. The negative lead of the ohmmeter shall be connected to the common return (pins A and S).

4.4.4.3 One-volt regulator. -With the Power **Supply Diode and Capacitor** Assembly connected in accordance with figure 1, variable resistor R_2 shall be adjusted to give a voltmeter reading of 1 plus or minus 0.05 volt . Under these conditions, the reading of the ammeter shall be observed to determine compliance with the requirements of 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

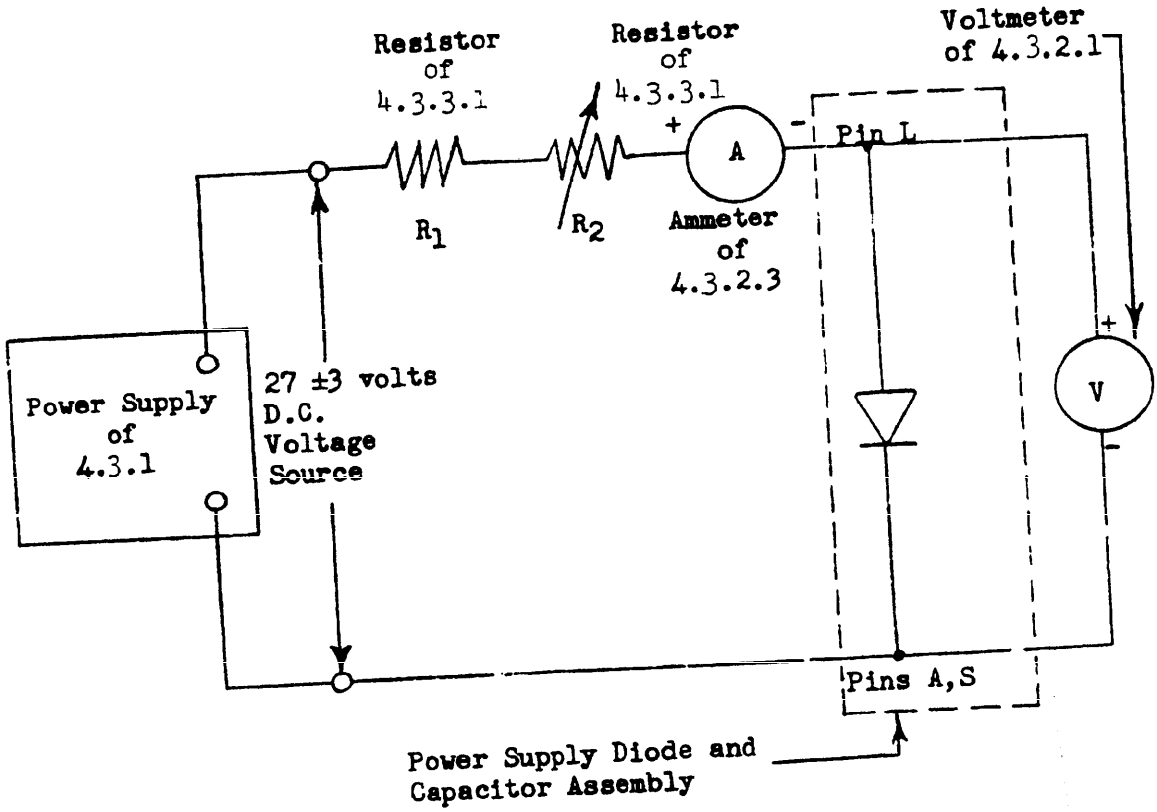


Figure 1. Connections for Test of 1-volt Regulator

4.4.4.4. Three-volt regulator. - With the Power Supply Diode and Capacitor Assembly connected in accordance with figure 2, variable resistor R_4 shall be adjusted to give a voltmeter reading of 3.0 plus or minus 0.1 volts. Under these conditions, the reading of the milliammeter shall be observed to determine compliance with the requirements of 3.3.4.

4.4.5 Preservation, packing and packaging. - Preservation, packing and packaging of the Power Supply Diode and Capacitor Assembly shall conform to Section 5 of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

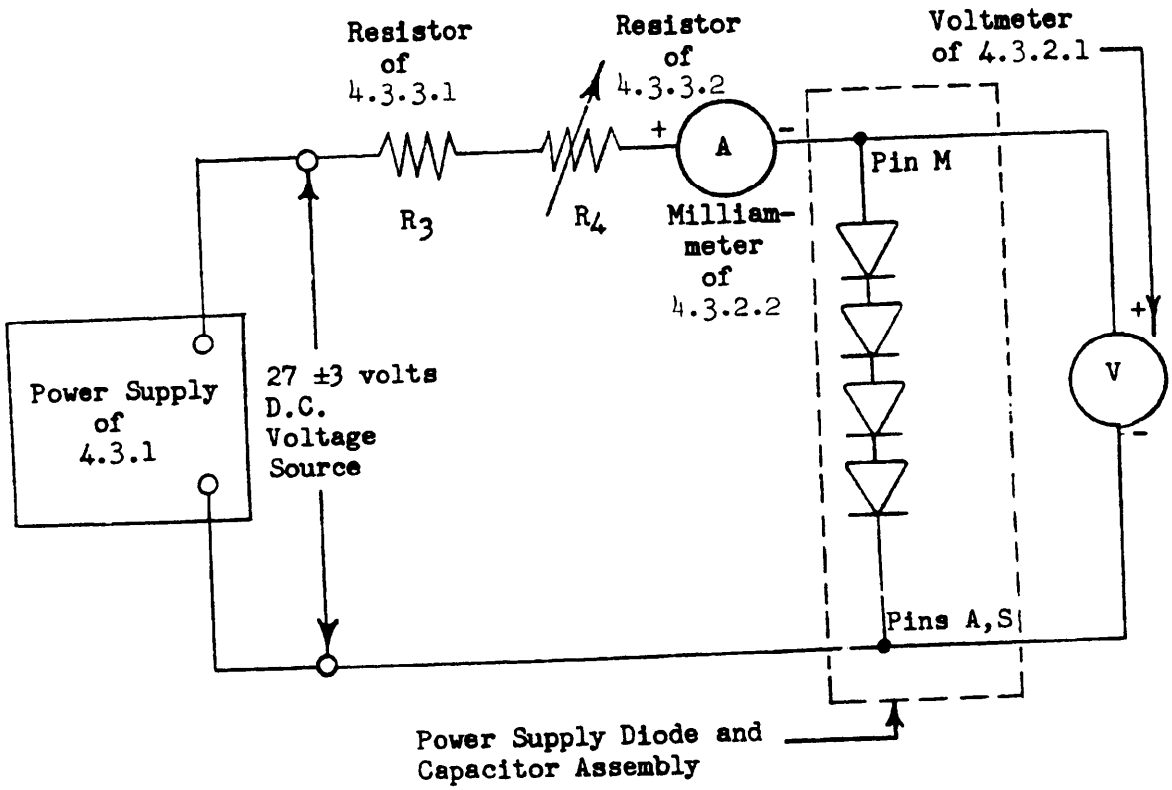


Figure 2. Connections for Test of 3-volt Regulator

4.5 Pre-production and periodic production sample tests.

4.5.1 Vibration, operating condition. - The Power Supply Diode and Capacitor Assembly, rigidly mounted in a suitable vibration fixture, shall be subjected to vibration tests so as to meet the requirements specified in 3.4.1, and shall meet all the performance requirements and product characteristics of this specification during and after the vibration tests.

4.5.2 Vibration-transportation. - The Diode and Capacitor assembly packaged and packed, as specified in Section 5, shall be vibration tested as specified in Specification MIL-W-21927, Section 4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

4.5.3 Shock, non-operating condition. - The Power Supply Diode and Capacitor Assembly, rigidly mounted in a suitable shock fixture, shall be subjected to shock tests so as to meet the requirements specified in 3.4.3, and thereafter shall reset all the performance requirements and product characteristics of this specification.

4.5.4 Shock-transportation, storage and handling. - The Diode and Capacitor Assembly, packaged and packed as specified in Section 5, shall be subjected to the appropriate rough handling tests specified in Specification MIL-W-21927, Section 4.2.

4.5.5 **Temperature, operating** condition. - The Power **Supply Diode** and Capacitor Assembly shall be subJected to temperature tests so as to meet the requirements specified in 3. *k.* **5.1** and thereafter shall meet all the performance requirements and product characteristics of this specification.

4.5.6 Temprature, non-operating condition. - The Power Supply Diode and Capacitor Assembly shall be subjected to temperature tests so as to meet the requirements specified in 3.4.5.2, and thereafter shall meet all the performance requirements and product characteristics of this specification.

4.5.7 Humidity. - The Power Supply Diode and Capacitor Assembly shall be subjected to humidity tests so as to meet the requirements specified in 3.4.6, and thereafter **shall** meet all the performance requirements and product characteristics of this specification.

45s.8 Tropical envirornment. - The Power Supply Diode and Capacitor Assembly shall be exposed to fungus tests so as to meet the requirements specified in 3.4.7, and thereafter shall meet all the performance re - quirements and product characteristics of this specification.

4.6 Failure of the Power Supply Diode and Capacitor Assembly to meet any of the requirements and tests of this specification shall be considered cause for rejection.

4.7 Functional tests. - At the conclusion of the tests specified **in 4.5.2** and 4.5.4, functional and other tests, as applicable; shall be conducted on the Diode and Capacitor Assembly to determine freedom from operational malfunction and compliance with all requirements of Section 3.

4.8 **Waiver** of tests. - Tests specified in 4.5.2 and 4.5.4 may be waived by procuring agency for Level C packs only, provided the con- tractor guarantees safe delivery to the using activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 Level A. - In addition to the following, Level A packaging shall be in accordance with MIL-P-17555.

5.1.1.1 Cleaning, drying and preservation application. - Not applicable.

5.1.1.2 Unit packaging. - Unit packaging of the Diode and Capacitor Assembly shall be in accordance with Method **IIe** of Specification MIL-P-116. The unit package shall contain one (1) Diode and Capacitor Assembly.

5.1.1.3 Intermediate package. - Not applicable.

5.10104 Cushioning. - The unit package, intermediate **package** (when used) and pack, shall incorporate sufficient cushioning material, bracing, or other adequate shock absorbing devices, to ensure that the Diode and Capacitor Assembly will meet all the requirements *of* Section 3 after being tested in accordance with 4.5.2 and 4.5.4.

At the time of **packaging or packing,** the moisture content of the cushioning material shall be no more than 5 percent. The pH range of the **material shall** be between 6.o and 8.o.

5.1.2 Ievel B. - Not applicable.

5.1.3 Level c.

5.1.3.1 Cleaning, drying and preservative application. - Not applicable.

5.1.3.2 Unit packaging. - Unit packaging of the Diode and Capacitor Assembly shall be in accordance with Method 111 of Specification MIL-P-116. The unit package shall contain one (1) Diode and Capacitor Assembly.

5.1.3.3 Intermediate package. - Not applicable.

5.2 **Packing.**

5.2.1 Level A. - In addition to the following, Level A packing shall be in accordance with Specification MIL-P-l7555.

5.2.1.1 Exterior containers. - Diode and Capacitor Assemblies packaged as described in 5.1.1.2 shall be packed in a wood box in accordance with Specification PPP-B-601 or overseas type, PPP-B-621, Class 2 (gross weight not to exceed 150 lbs.) or in fiber boxes in accordance with Specification **PPP-B-636,** Class 2 (gross weight not to exceed 70 lbs.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

5.2.2 Level B

5.2.2.1 Exterior containers. - Diode and Capacitor Assemblies packed as described in 5.l.l.2 shall be packed in a wood box in accordance with Specification PPP-B-601 or domestic type, PPP-B-621, Class 1 (gross weight not to exceed 150 lbs) or in fiber boxes in accordance with Specification PPP-B-636, Class 1 (gross weight not to exceed 70 lbs).

5.2.3 Level C. - Diode and Capacitor Assemblies packaged in accordance with 5.1.3.2 shall be packed to afford protection against damage during shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with Uniform Freight Classification **Rules** or other common carrier regulations applicable to the mode of transportation.

5.3 Marking

503.1 Special markings. - None, unless otherwise specified,

5.3.2 Normal markings. - In addition to the markings required by contract ***or*** order, unit packages, intermediate packages (when used), and shipping containers shall be marked in accordance with the requrements of MIL-STD-129, including serial numbers.

6. NOTES

6.1 Intended use. - The Power Supply Diode and Capacitor Assembly is intended for use in the Angle Solvers Mark ***18*** Mod 2 and Mod 3, or other suitable application.

6.2 Ordering data. - Procurement documents should specify the specific title, number, and ***date*** of this specification and exceptions to this specification; applicable drawings and other documents; selections of applicable levels of packing; and guarantee clause. (See 6.5.)

6.3 Criteria for use of proper level of preservation, packaging, and packing shall be as follows:

For level A. - This level shall be used for those Items which are to be shipped to indeterminate destinations or stored under indeterminate conditions for redistribution anywhere.

For Level B. - This level shall be used only when It is definitely known that the item will be held in covered storage in overseas **locations for 6 months or less or in domestic locations for an indefinite period.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

For Level C. - This level shall be used only when It Is **definitely known** that the **packaged item is to be shipped to domestic installatIons for immediate use at the first receiving activity.**

6.4 The attention of the contracting officer is invited to the Quality Assurance Provisions and options in Specification MIL-P-116 and to paragraph 4.8.

6.5 Guarantee. - The contract or order shall include a requirement for a guarantee stating that any Power Supply Diode and Capacitor Assembly which fails to meet the requirements of this specification within one year after delivery because of a defect in material ***or*** workmanship or because of the vendor's failure to comply with the requirements of the applicable drawings and specifications shall be replace by the vendor at no cost to the Government.

6.6 **The** contract or order shall include a sufficient number of extra items to cover production and pre-production testing samples.

NOTICE : When Government drawings, specifications, or other data are used for any purpose ***other*** than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, ***or*** other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented inventions that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET
NAVWEPS FORM 4121/8 (8-62)

FORM APPROVED
BUDGET BUREAU NO. 48-R300

INSTRUCTIONS

This sheet is to be filled out by Government or contractor personnel involved in the use of this specification in procurement of products for ultimate use by the activity shown on the reverse of this sheet.

This sheet is provided for obtaining information which will aid the activity shown in insuring that through use of this specification suitable products can be procured with a minimum amount of delay and at the least cost.

Comments and the return of this sheet will be appreciated.

Fold on dotted lines on reverse side, staple in corner, and send to the activity shown.

SPECIFICATION *(No. and abbrev. title)*

ORGANIZATION	CITY	STATE

CONTRACT NUMBER	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A DIRECT GOVERNMENT CONTRACT ☐ OR A SUBCONTRACT ☐

1. HAS ANY PART OF THIS SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
(If so, give paragraph number and wording, and recommendations for correcting the deficiencies.)

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
☐ YES ☐ NO IF YES, IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If additional papers are attached, send this form and papers in an envelope. This form is addressed for use in window envelope when appropriate.)*

SUBMITTED BY *(Print name and title)*	DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.

Fold

DEPARTMENT OF THE NAVY
BUREAU OF NAVAL WEAPONS
WASHINGTON 25, D.C.

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
NAVY DEPARTMENT

Chief, Bureau of Naval Weapons (RREN-5)

Navy Department

Washington 25, D.C.

Fold

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:56Z
Check the source to verify that this is the current version before use.