INCH-POUND

A-A-55263
November 4, 1994

COMMERCIAL ITEM DESCRIPTION

SHIRT, WOMAN'S, TUCK-IN

The General Services Administration has authorized the use of this commercial item description as a replacement for YAGC 91-2 for all Federal agencies.

1. Scope. This commercial item description covers the requirements for woman's tuck-in short and long sleeve dress shirt. The shirt is intended to be worn by female military personnel of the Department of the Air Force .

2. Classification. The shirt shall be of one type and two classes.

Class 1 - Short sleeve
Class 2 - Long sleeve

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FQSD, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20260-26T09:45Z
Check the source to verify that this is the current version before use.

3. Salient characteristics.

3.1 Description. The tuck-in shirt shall have a princess-line style with a two-piece split front and a one piece back and the princess seams shall extend to the shoulder seams. The shirt shall have a 7 button front closure with straight cut, purl or whip type buttonholes, positioned with one horizontal buttonhole at top of right front 1/2 ± 1/16 inch from the finished front edge and 6 vertical buttonholes through right front 5/8 ± 1/16 inch from folded edge positioned in accordance with buttonhole marker. The shirt shall have two shoulder epaulets with edge stitching on sides and pointed edges, 1/4 inch from edge. Epaulets shall be positioned so that pointed end of epaulet shall not extend beyond collar seam. The shirt shall have a convertible shirt waist collar with edge stitching on the upper and side edges 1/4 inch from seamed edges and shall have a shaped collar stand.

The collar shall finish 2-3/4 ± 1/8 inches long when measured from junction point of collar and lapel. Note: The collar is positioned so that it begins approximately 3/4 inch from folded edge of fronts.

The shoulder epaulets shall have a straight cut, purl or whip type horizontal buttonhole centered in epaulet with cut edge of buttonhole 1/2 inch from pointed end. Epaulets shall finish 1-3/4 ± 1/8 inches wide at armhole seam tapering to 1-1/2 ± 1/8 inches at buttonhole end. The shirt shall have a button positioned on each shoulder positioned 1/8 ± 1/16 inch forward of shoulder seam to correspond with buttonhole in epaulets.

The collar, collar stand, epaulets, class 2 shirt cuffs, and front facing shall have fusible interlining. The shirt shall have a 1/8 to 3/16 inch wide bottom hem with raw edge turned under. The shirt front facing shall be of basic material and shall finish 2-1/2 inches wide down front and 1-1/2 inches wide at shoulder. All raw edges of shirt shall be overedge stitch. There shall be a combination identification and instruction label and a size label centered at back of neck and sewn into collar seam.

The class 1 (figure 1) shirt's sleeves shall have a 1-1/4 to 1-3/8 inches hem with the raw edge folded under. The class 2 shirt's sleeves shall have bound sleeve openings using a continuous strip of basic material and binding shall finish 1/2 to 3/8 inch wide.

The class 2 shirt (figure 2) shall have a 3/4 inch deep sleeve pleat at cuff positioned 2 to 2-1/2 inches from bound sleeve opening on back of sleeve. The cuffs shall finish 2-1/4 ± 1/8 inches wide, shall have rounded lower corners, a horizontal straight purl or whip type buttonhole centered, ± 1/4 inch, in cuff 1/2 ± 1/8 inch from the front edge and two buttons on each cuff for adjustments. The cuffs shall be edge stitched 1/4 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

from seamed edge and shall finish at top edge of cuff, edge stitching may taper to edge of cuff at top of cuff.

The shirt shall have a minimum rating of "4" for seam appearance at a distance of 3 feet when tested in accordance with AATCC Test Method 88B.

3.2 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the commercial item description and the figures, the commercial item description shall govern.

3.3 Pattern. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/4 inch for joining seams. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

3.4 Basic Material. The basic material for the shirt shall be a polyester and cotton blend broadcloth treated with a durable press finish, The cotton shall be carded and then combed. All yarn shall be a blend of 65 (± 5) percent polyester and the remaining percentage combed cotton and shall be drawn and spun into single yarns for both warp and filling. The material shall be a plain weave, end-and-end construction with alternate dyed and white warp yarns and an all white filling. The finished material shall match the standard sample for color Air Force Blue, shade 1550. The material shall be scoured, singed, stabilized, and mercerized as required to result in a smooth and lustrous finish equal in character to the standard sample.

The material shall weigh 3.8 to 4.3 ounces per square yard and have a minimum of 100 ends per inch and 62 picks per inch when tested in accordance with ASTM D-3776, Option C, and shall have a minimum breaking strength of 85 pounds in the warp and a minimum of 55 pounds in the filling when tested in accordance with ASTM D-5034. The cloth shall have a tear strength of 5 lbs. in the warp and 3 lbs. in the filling when tested in accordance with ASTM D-1424.

The finished material shall not shrink or elongate more than 2.0 percent in either the warp or filling direction when tested in accordance with AATCC 135, with a specimen size of 22 by 22 inches with 18 inch markings in both warp and filling directions. The material shall have a rating of "good" or "5" when tested for colorfastness to laundering[1]/, perspiration[2]/, light[3]/, dry heat[4]/, and wet and dry crocking[5]/.

Footnotes:

1/ Colorfastness to laundering - In accordance with AATCC 61 Test 3A (after 3 wash and dry cycles), except the sample size shall be 4.0 ± 0.5 grams with a water hardness not more than 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

parts per million. The rotating time shall be 30 minutes with ten stainless steel balls in each cylinder, soap solution shall contain 0.5 percent by weight, P-D-245, detergent, laundry, type II.

2/ Colorfastness to perspiration - In accordance with AATCC 15 except the test for acid and alkaline solution shall apply.

3/ Colorfastness to light - In accordance with AATCC 16, Option A, except when a color change equal to step 4 on the Gray scale is evident in either the standard sample or sample being evaluated, exposure shall continue for an additional number of hours equal to the number of hours at which the color change was apparent. Specimens which do not show a color change until 80 AFU's shall have a maximum exposure of 140 hours.

4/ Colorfastness to dry heat - In accordance with AATCC 117.

5/ Colorfastness to wet & dry crocking - In accordance with AATCC 8.

3.5 Interlining Material. The interlining material shall be a white fusible non-woven web, 50 to 100 percent polyester with the remaining percentage nylon, thermally bonded by heat-activated fibers or powders. The web shall be either flat or print-bonded with a weight of 1.7 to 2.4 ounces per square yard when tested in accordance with ASTM D-3776, Option C. The material shall have a minimum breaking strength of 3.0 pounds for the machine (warp) direction and 2.0 pounds for the crosswise (filling) direction when tested in accordance with ASTM D-5034. For optimum fusing results, the fusing material manufacturers' recommendations for fusing, dwell time, pressure, and temperature, based upon fusing equipment used and basic material shall be utilized. There shall be no evidence of bubbling or delamination of the fusing area and there shall be no "strike through" of the adhesive after fusing.

3.6 Labels.

3.6.1 Combination label. The combination identification and instruction label shall be a nonwoven material and have the following printed inscription and shall include commercial laundering instructions:

SHIRT, WOMAN"S, TUCK-IN
FIBER CONTENT: POLYESTER (65%) - COTTON (35%)
STYLE NO:
NAME OF CONTRACTOR:

The combination label shall be clearly legible and show "good" colorfastness to laundering when tested in accordance with AATCC No. 61, Test IV.

3.6.2 Size identification. The size identification shall be stamped on the collar at center back neck using a black marking

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

medium. Note: sleeve length may be abbreviated as "SS" for class 1 shirt, and for class 2 shirt "SLS", "RLS", and "LLS" may be used.

3.7 Thread. The thread shall be White, C.A. 66050, conforming to A-A-50199 Ticket No. 70, 2-ply for the needle, ticket No. 100, 2 ply for the looper, and ticket No. 50, 2 ply for button and buttonholes.

3.8 Buttons. The shirt's buttons shall conform to size 19 line, Type II, Class K, Style 25 of V-B-871 and shall match color white cable no. 62031 in accordance with the Department of Defense Standard Shades for Buttons.

3.9 Size and measurements. The shirt shall conform to the size and measurements in Table I.

TABLE I. - Finished Measurements.
(in Inches)

				SLEEVE LENGTH			
SIZE	BUST A	BACK LENGTH B	COLLAR C	CLASS 1 SHORT D	CLASS 2 SHORT E[1]/	CLASS 2 REGULAR E[2]/	CLASS 2 LONG E[3]/
2	18-1/4	25-5/8	13-3/8	4-1/2	28-3/4	30-1/4	32-7/8
4	18-3/4	25-7/8	13-5/8	4-1/2	29	30-1/2	33-1/8
6	19-1/4	26-1/4	13-7/8	4-1/2	29-1/4	30-3/4	33-3/8
8	20-1/4	26-1/2	14-1/8	4-1/2	29-5/8	31-1/8	33-7/8
10	21	26-7/8	14-3/8	4-1/2	30	31-1/2	34-1/4
12	21-3/4	27-1/4	14-3/4	4-1/2	30-1/4	31-3/4	34-1/2
14	22-1/2	27-1/2	15-1/8	4-1/2	30-1/2	32	34-3/4
16	23-1/2	27-3/4	15-1/2	4-1/2	30-7/8	32-3/8	35-1/8
18	24-1/2	28-1/8	16	4-1/2	31-1/4	32-3/4	35-1/2
20	25-1/2	28-1/2	16-1/2	4-1/2	31-1/2	33	35-3/4
TOL.	+ 1/2 - 1/4	± 1/2	± 1/4	± 1/4	+ 1/2 - 1/4	+ 1/2 - 1/4	+ 1/2 - 1/4

Footnotes:

1/ Inseam sleeve length - Short - all sizes shall be 16-1/2 (± 1/4) inches when measured from the underarm seam along the seam to the bottom edge of the sleeve cuff. Sleeve inseams shall be within + 1/4 inch measurement of each other.

2/ Inseam sleeve length - Regular - all sizes shall be 18 (± 1/4) inches when measured as stated in footnote 1/.

3/ Inseam sleeve length - Long - all sizes shall be 20-5/8 (± 1/4) inches when measured as stated in footnote 1/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

A. BUST: Measurement taken across front at the base of armhole from folded edge to folded edge.

B. BACK LENGTH: Measurement taken along center of back from collarstand seam to bottom edge of shirt.

C. COLLAR: Measurement taken along inside, from collar end to collar end, at the gorge.

D. SHORT SLEEVE LENGTH: Measurement taken along inseam, from underarm seam to bottom edge of sleeve.

E. LONG SLEEVE OUTSEAM LENGTH (Short, Regular and Long): Measurement taken from center back at collarstand to seam, diagonally across back and down sleeve to bottom of cuff.

3.10 Label/tag. Each item shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.11 REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description; conforms to the producer's own drawings, specifications, standards, and quality assurance practices; and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Market acceptability criteria. The item offered must have been sold to the commercial market or to the Government, and the contractor shall certify and provide supporting documentation as to its serviceability and the long term (five years) availability of all necessary maintenance and logistics support parts and materials.

4.3 Warranty. The item offered shall include the standard warranty given to the commercial market beginning with the date of delivery of the individual items.

4.4 Visual examination. Each shirt shall be examined for the defects listed in paragraph 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

4.4.1 Defects. Any hole, cut, or tear; color not as specified; any part shaded; any spot or stain (outside); raw edges, open seams, thread ends not removed, or loose tension resulting in loose seams; any material defects, distorted parts or poor workmanship; any component part omitted; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5. Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

6.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Test Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

6.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

MILITARY INTERESTS:

Custodians
Air Force 45, 32

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

Project 8410-0858

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

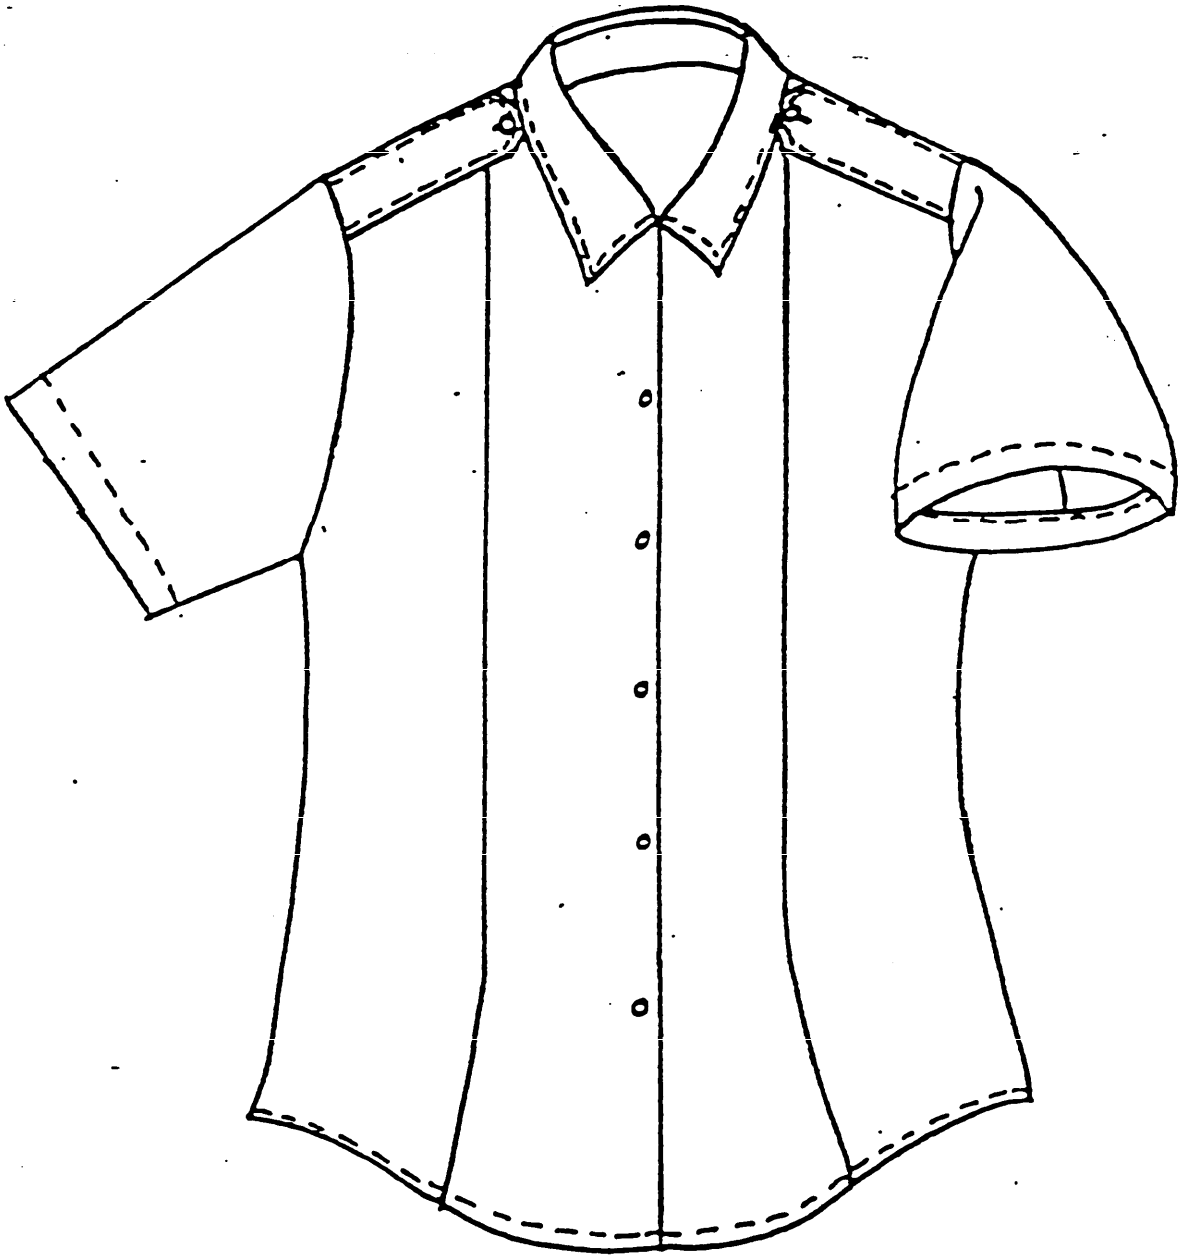


Figure 1.

Class 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

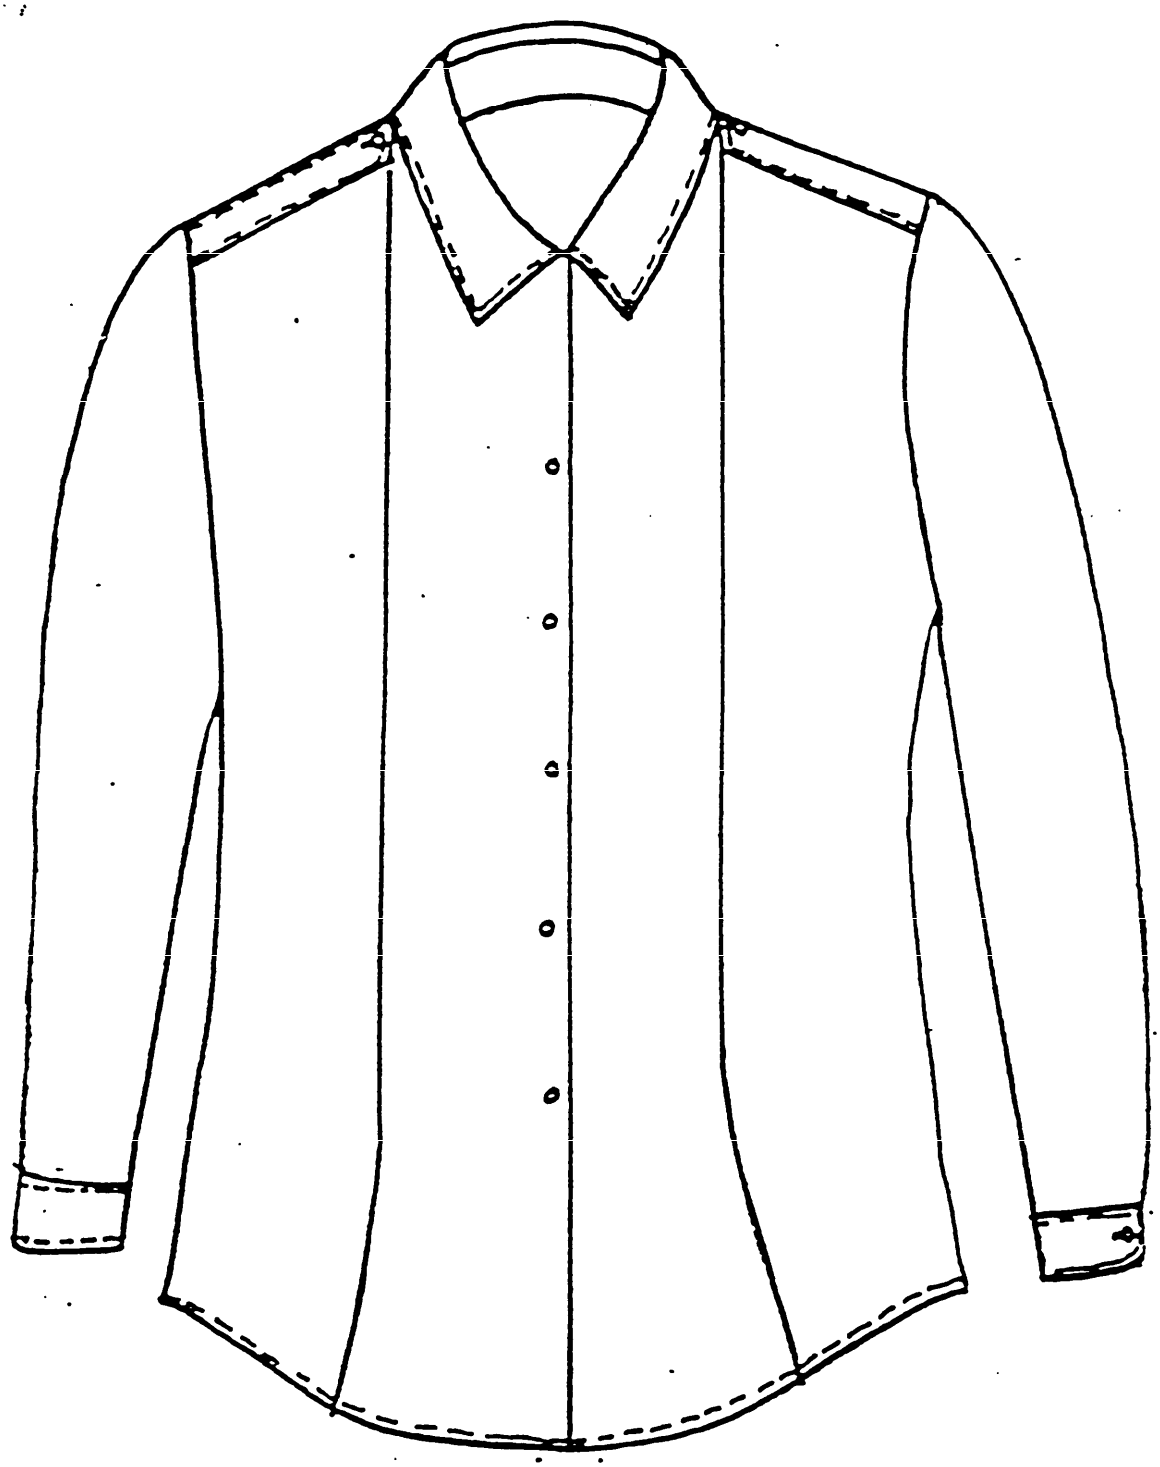


Figure 2.

Class 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.