MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

LOGIC CONVERTER, ANALOG TO DIGITAL, KEY CODE DBA

This amendment forms a part of Military Specification MIL-M-28787/154A(EC), dated 22 January 1979, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 5

3.5.8, second line: Delete "M28787/154" and substitute "M28787/154-1".

PAGE 10

4.3, delete and substitute:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 12

6.3, delete and substitute the following:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/154 supersedes Department of the Navy, Naval Electronic Systems Command Drawing No. 28687-0102-823. Part number M28787/154-1 supersedes part numbers 0102-823 and M28787/154.

"6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue."

PAGE 22

FIGURE 9: Delete and substitute new figure 9 as printed on page 2 of this amendment.

PAGE 35

FIGURE 13: Delete and substitute new figure 13 as printed on page 3 of this amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N625)

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:19Z
Check the source to verify that this is the current version before use.

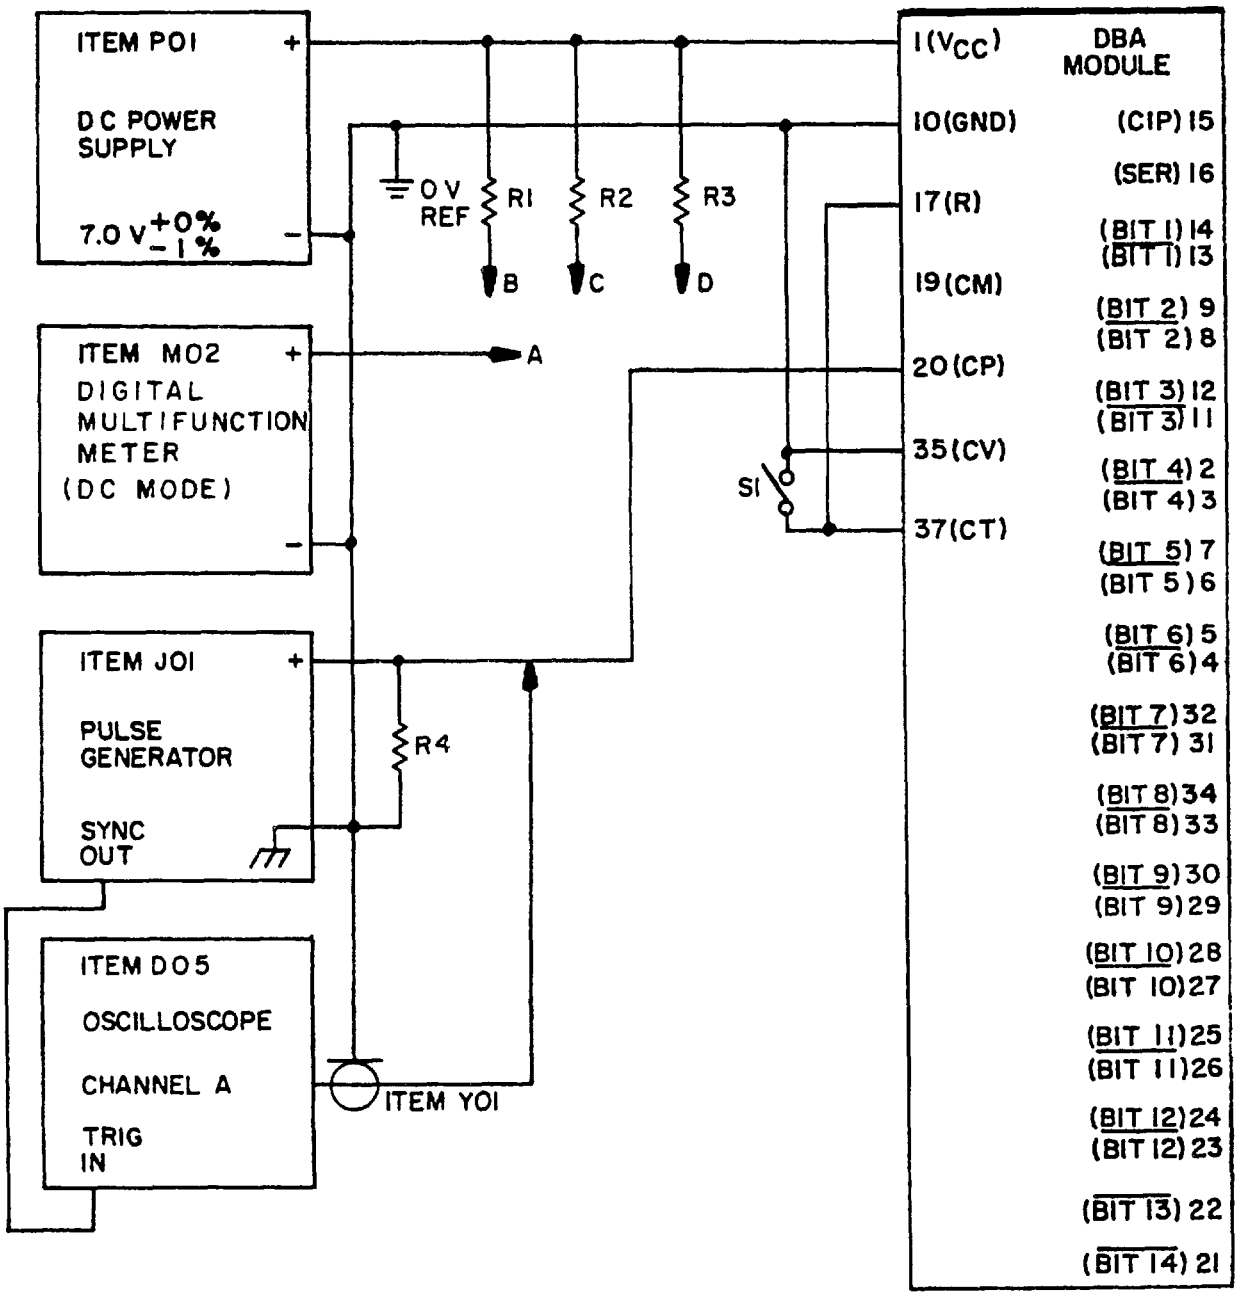


FIGURE 9 V_{out} (low-loaded) test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:19Z
Check the source to verify that this is the current version before use.

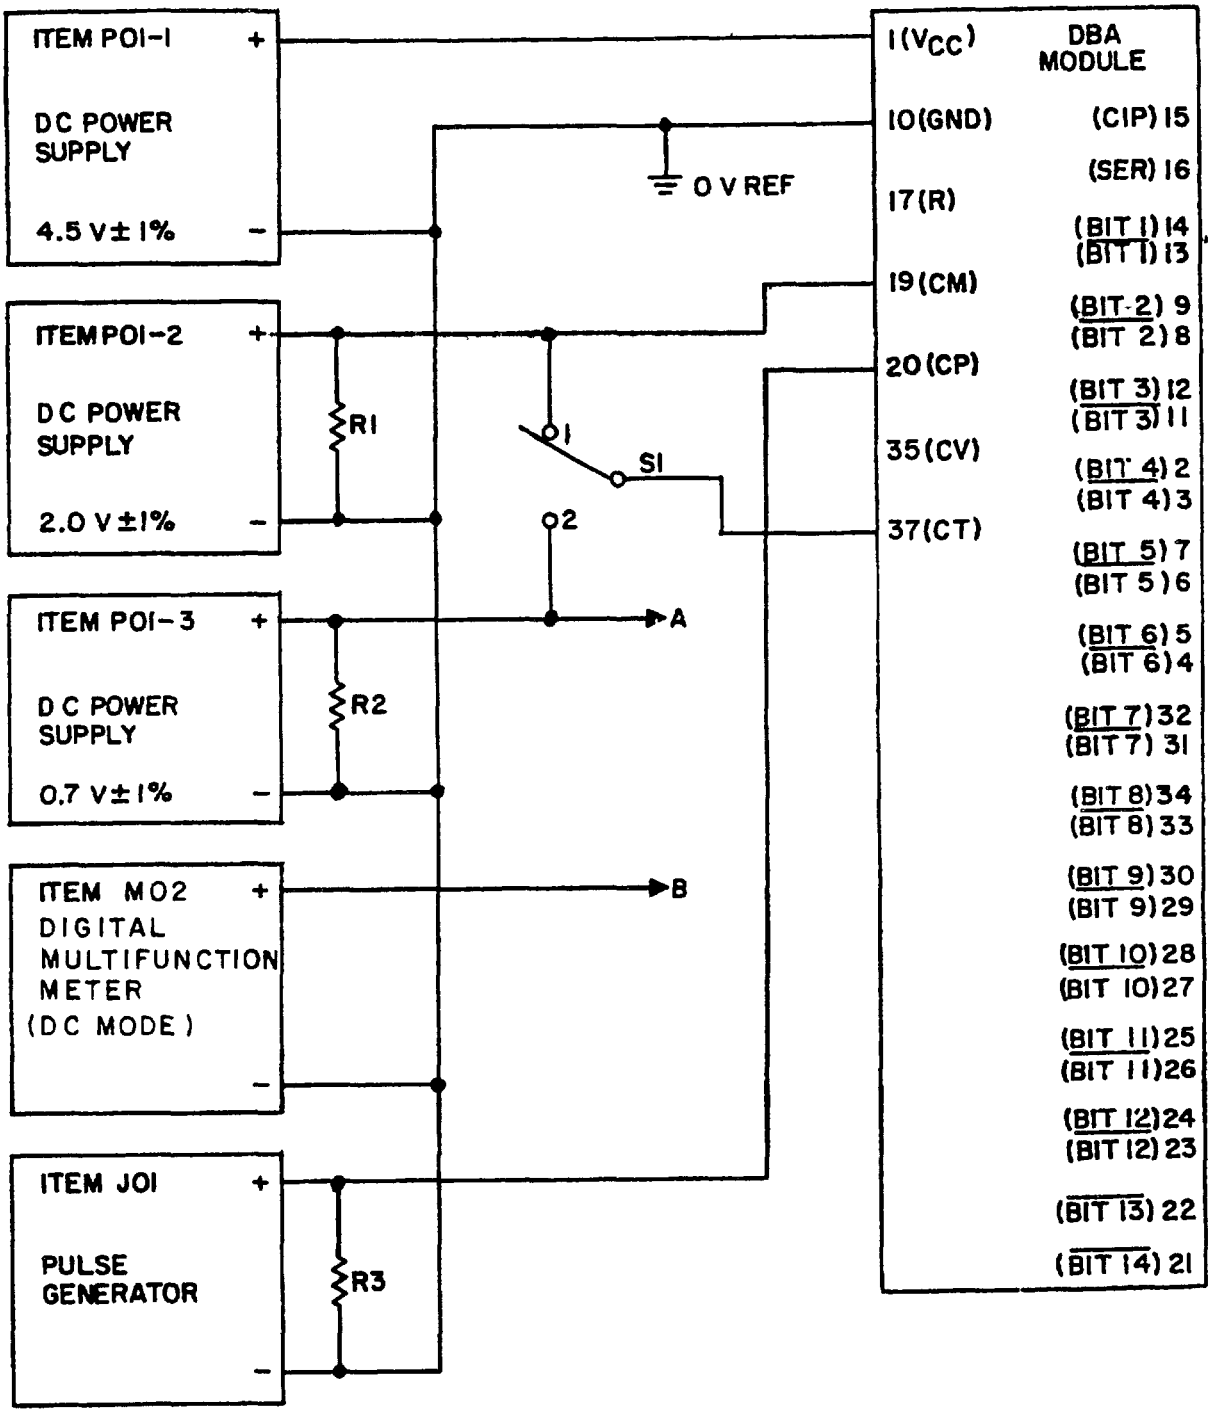


FIGURE 13. Output voltage (input threshold conditions), low-level and high-level, test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:19Z
Check the source to verify that this is the current version before use.