INCH-POUND

MIL-M-28787/163A(SH)
AMENDMENT 1
23 March 1992

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

DRIVER, INTERFACE, DIGITAL, KEY CODE EKC

This amendment forms a part of Military Specification MIL-M-28787/163A(EC), dated 10 November 1983, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 4

TABLE I, Test conditions H1, H2, Min columns: Delete "17" (four places) and substitute "12" (four places).

TABLE I, Test conditions J1-J6, Max columns Delete "1.5" (two places) and substitute "1.58" (two places).

TABLE I, Test conditions J7-J12, Max columns: Delete "1.5" (two places) and substitute "1.58" (two places).

PAGE 6

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through S shall be performed in any order with the following exceptions. Test conditions A, B, and S are stress tests and shall be performed only at 25 ± 5°C If test conditions A, B, or S are part of a sequence of tests, the order of testing shall be as follows: A, B, and S where applicable, followed by the remaining tests in the sequence."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:23Z
Check the source to verify that this is the current version before use.

4.5 1, fifth line: Delete "B through R" and substitute "C through P"

4.5.3, third and sixth lines. Delete "B through R" and substitute "C through P".

PAGE 14

FIGURE 6: Delete and substitute new figure 6 as printed on page 3 of this amendment.

PAGE 29

TABLE X, Test conditions H1 and H2, Min columns Delete "17" (two places) and substitute "12" (two places).

PAGE 31


TABLE XI, Test conditions J1 through J12, Max column Delete "1.5" (one place) and substitute "1.58" (one place)

Preparing activity
Navy - SH

(Project 5963-N821)

Agent: NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:23Z
Check the source to verify that this is the current version before use.

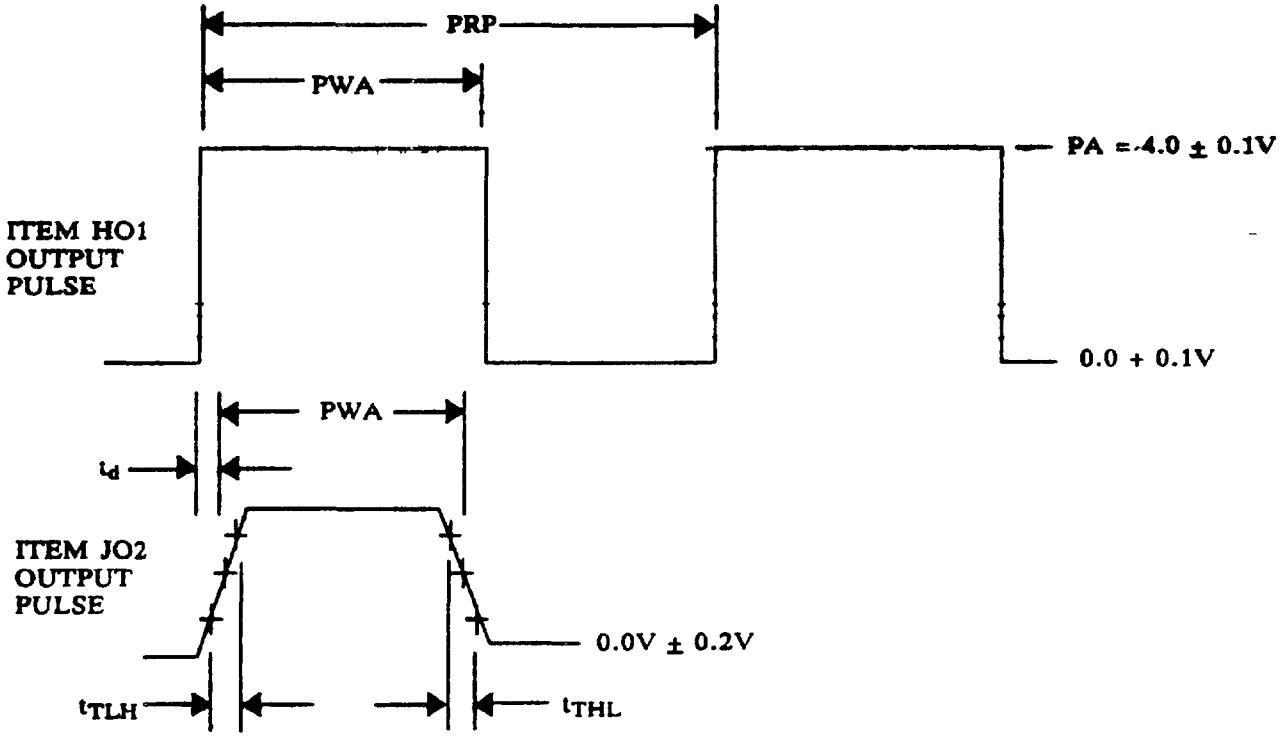

NOTES
1. Item H01 pulse parameters:
   PWA = 2.5 ± 0.5s.
   PRP = 5 ± 1s.
2. Item J02 pulse parameters:

   $PWA = 15^{+0.0}_{-0.5}$ ms.

   $t_{TLH} = t_{THL} = 50 \pm 5ns$
   $t_d = 0ns \pm 50ns$

FIGURE 6. Life test circuit waveforms

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:23Z
Check the source to verify that this is the current version before use.