MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MEMORY, READ ONLY, PROGRAMMABLE, DIGITAL, KEY CODE GYF

This amendment forms a part of Military Specification MIL-M-28787/169B(EC), dated 27 April 1983, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

3.6.8, delete and substitute the following:

"3.6.8 Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part number M28787/169-1 and as specified in the user's detailed module document, except no marking shall interfere with heat dissipation from the fin (for example, affixing a label which may be a heat barrier)."

PAGE 12

6.5, delete and substitute the following:

"6.5 Cross reference of classification. Military Specification MIL-M-28787/169 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2833748. Part number M28787/169-1 supersedes part numbers 2833748 and M28787/169.

"6.6 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes,(additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue."

PAGE 64

FIGURE 25: Delete and substitute new figure 25 as printed on page 2 of this amendment.


Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N569)

FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:24Z
Check the source to verify that this is the current version before use.

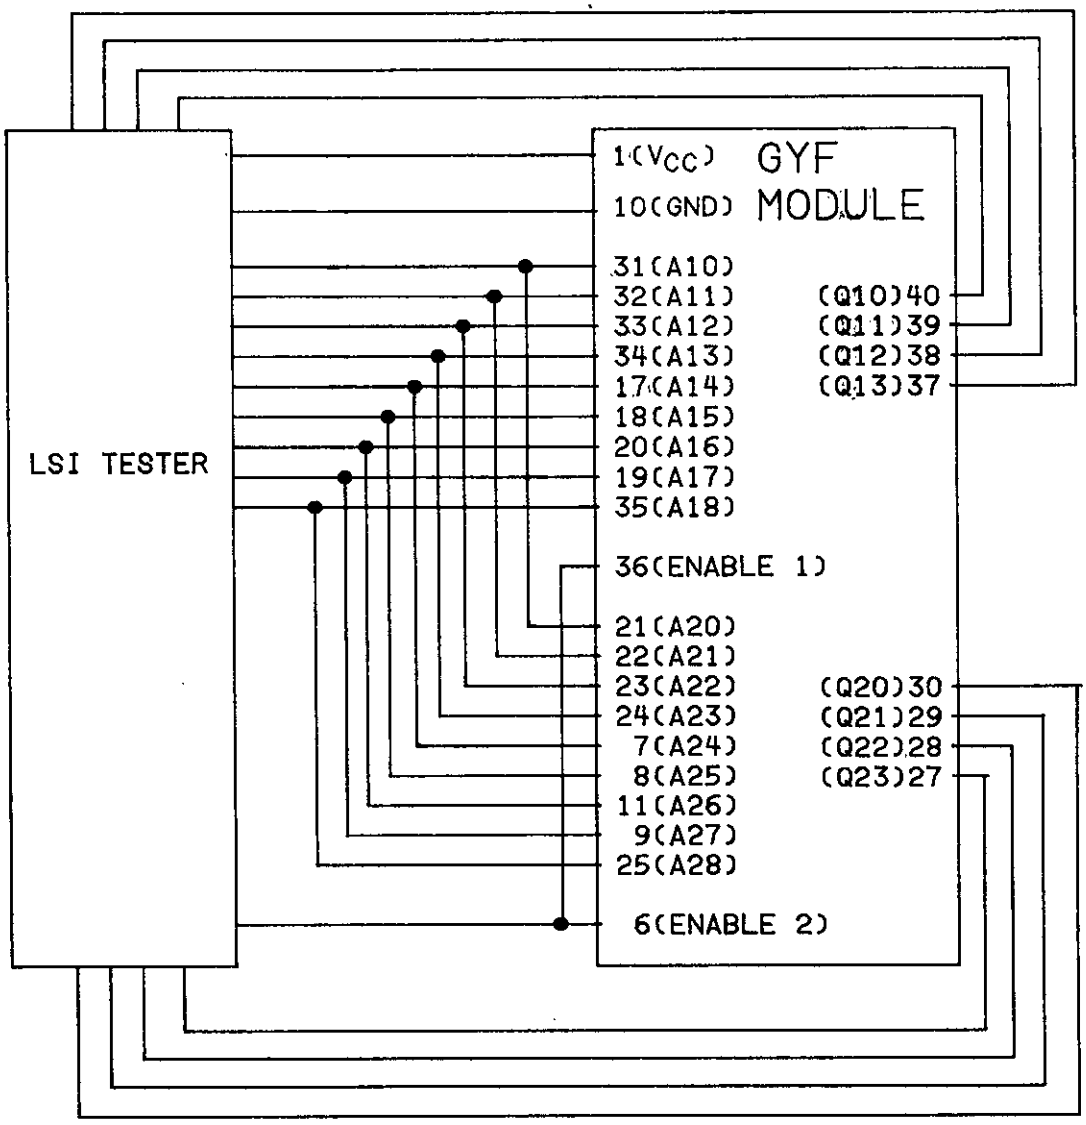

NOTES:
1. V_{CC} = 4.5 V ±1% for test conditions V1 and V3.
2. V_{CC} = 5.5 V ±1% for test conditions V3 and V4.
3. Load output under test with a load as specified on figure 16.

FIGURE 25. Galloping read access pattern test circuit for table XVIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:24Z
Check the source to verify that this is the current version before use.