INCH-POUND

MIL-M-28787/171A(SH)
AMENDMENT 1
29 March 1991

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

GATE, EXCLUSIVE OR, DIGITAL, KEY CODE EBB

This amendment forms a part of Military Specification MIL-M-28787/171A(EC), dated 14 May 1982, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 4

TABLE I, Test conditions H1-H12, Test type column Delete "X" and substitute "S".

PAGE 6

4.4.2 Delete and substitute the following:

"4 4.2 Order of testing. Test conditions A through U shall be performed in any order with the following exceptions Test conditions A, B, C, and H are stress tests and shall be performed only at 25 ± 5°C If test conditions A, B, C, or H are part of a sequence of tests, the order of testing shall be as follows. A, B, C, and H where applicable, followed by the remaining tests in the sequence "

4.5.1, fifth line: Delete "D through T" and substitute "D through G and J through T".

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:25Z
Check the source to verify that this is the current version before use.

4 5 2, fourth line Insert ", and test condition T," after "test type column"

4 5 3, third line Delete "D through T" and substitute "D through G and J through T".

4 5.3, sixth line Delete "D through T" and substitute "D through G and J through T".

PAGE 12

FIGURE 5. Delete and substitute new figure 5 as printed on page 3 of this amendment

PAGE 19

FIGURE 8. Delete and substitute new figure 8 as printed on page 4 of this amendment


NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - SH

(Project 5963-N807)

Agent: NW


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:25Z
Check the source to verify that this is the current version before use.

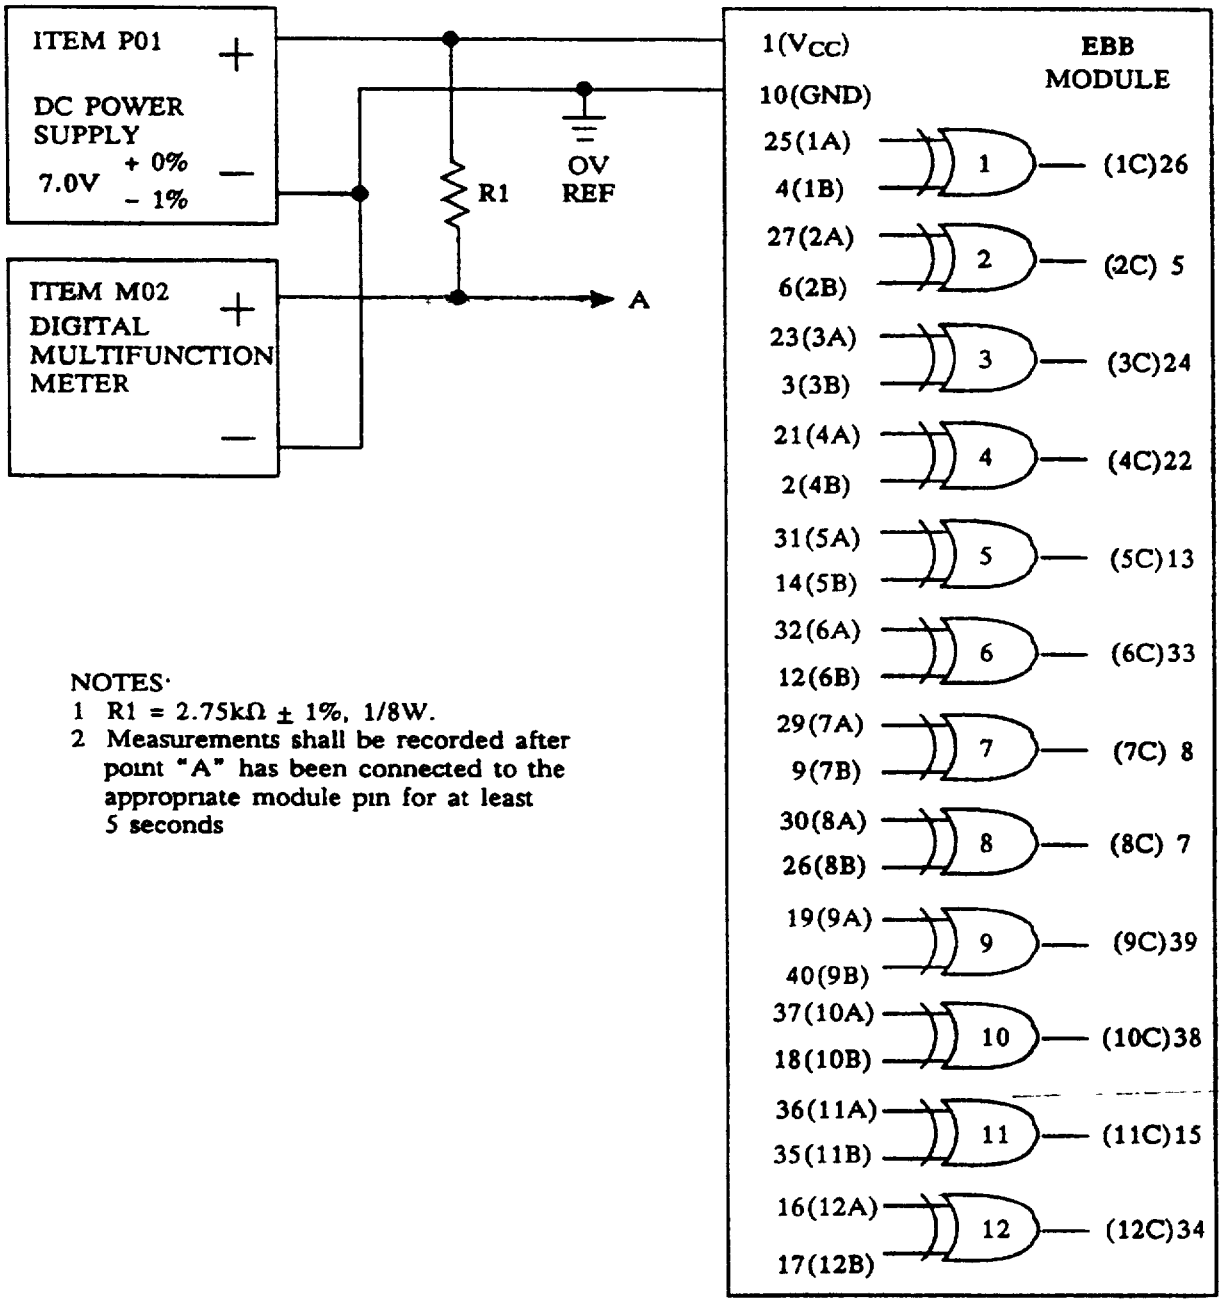

NOTES:
1. R1 = 2.75kΩ ± 1%, 1/8W.
2. Measurements shall be recorded after point "A" has been connected to the appropriate module pin for at least 5 seconds

FIGURE 5 V_{OUT} (low-loaded) test circuit for table III

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:25Z
Check the source to verify that this is the current version before use.

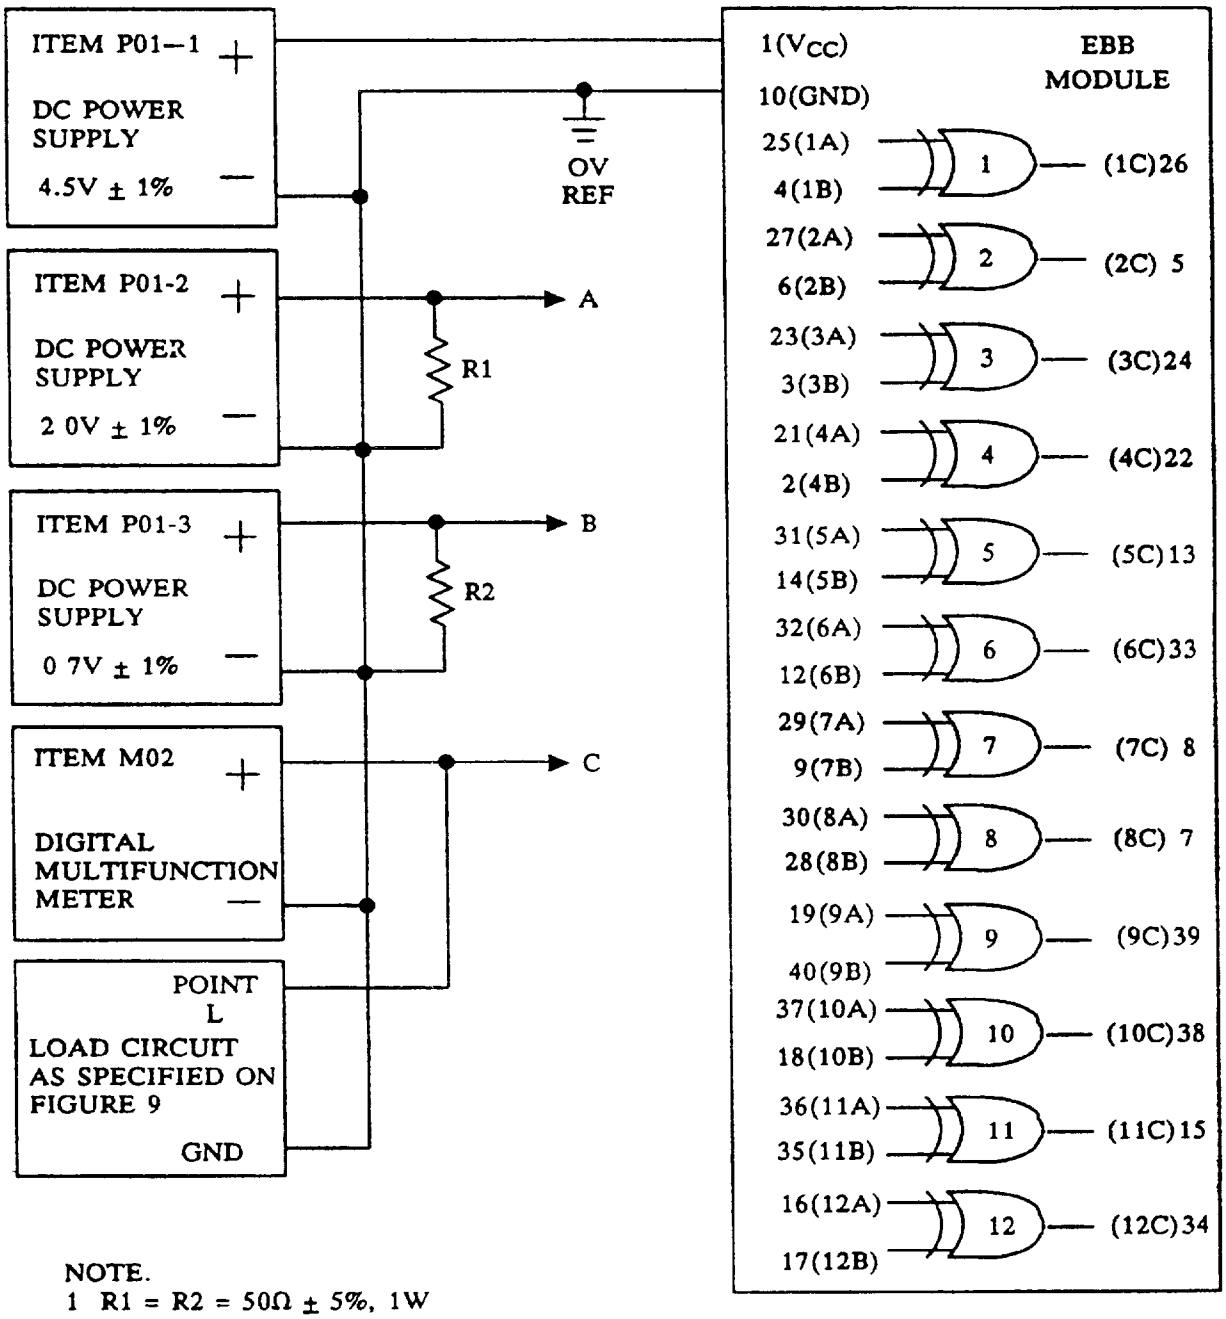

NOTE.
1 R1 = R2 = 50Ω ± 5%, 1W

FIGURE 8 Static output voltage (low-level and high-level) test circuit for tables VI and VII

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:25Z
Check the source to verify that this is the current version before use.