INCH-POUND

MIL-M-28787/173A
AMENDMENT 1
28 April 1993

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

MULTIPLEXER, DIGITAL, KEY CODE EBE

This amendment forms a part of Military Specification MIL-M-28787/173A(EC), dated 18 February 1982, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test conditions J1-J6, Test type column: Delete "X" and substitute "S".

TABLE I, Test condition K, Test type column: Delete "S" and substitute "X".

PAGE 6

4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through U shall be performed in any order with the following exceptions. Test conditions A, B, C, D, and J are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, D, or J are part of a sequence of tests, the order of testing shall be as follows: A, B, C, D, and J where applicable, followed by the remaining tests in the sequence."

4.5.1: Delete and substitute the following:

"4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through U in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions E through H and K through T shall be performed in the order specified in 4.4.2 using the initial limits for the applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:26Z
Check the source to verify that this is the current version before use.

4.5.2: Delete and substitute the following:

"4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be operated in the test circuit shown on figure 4. Following the vibration tests, the electrical tests in table I which are marked with an "X" in the test type column, and test condition T, shall be performed using the initial limits at 25 ± 5°C ambient."

4.5.3: Delete and substitute the following:

"4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests E through H and K through T shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table I. Following the return of the module to 25 ± 5°C, electrical tests E through H and K through T shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table I."

PAGE 58

FIGURE 19: Delete and substitute new figure 19 as printed on page 3 of this amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0159)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:26Z
Check the source to verify that this is the current version before use.

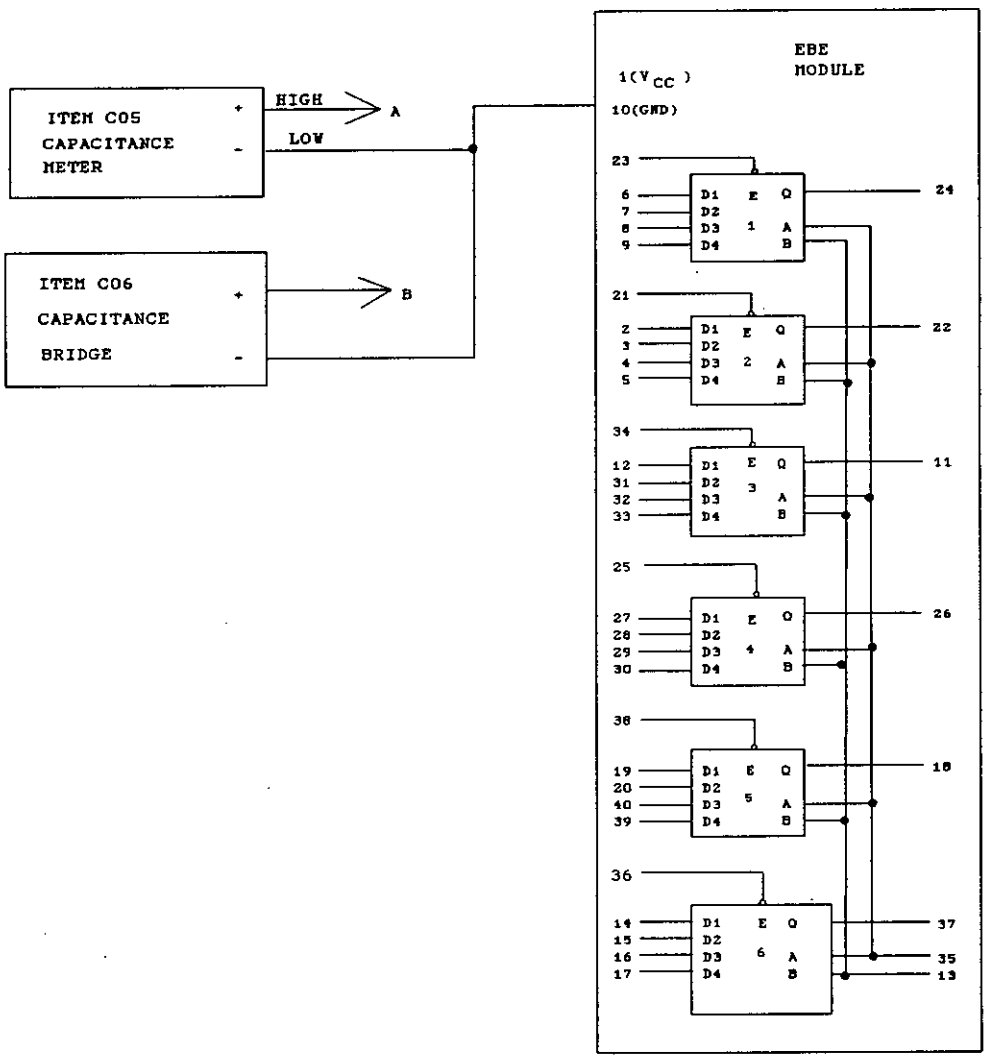

NOTES:
1. Null out the effect of the test leads prior to connecting to the module.
2. Do not attach test connector or wires to any of the module pins other than pin 10 and the pin under test. Stray capacitance added to other pins may affect the readings.
3. Capacitance bridge (C06) setup: Frequency = 1KHz.
   V_{pk} = 0.3V maximum.

FIGURE 19. Power supply filter capacitance and input capacitance test circuit for tables XVIII and XIX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:26Z
Check the source to verify that this is the current version before use.