MIL-M-28787/174A(EC)
AMENDMENT 2
5 August 1983
SUPERSEDING
AMENDMENT 1
4 February 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

ARITHMETIC LOGIC UNIT, DIGITAL, KEY CODE FBA

This amendment forms a part of Military Specification MIL-M-28787/174A(EC), dated 5 May 1982, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 18

* FIGURE 7: Delete and substitute new figure 7 as printed on page 2 of this amendment.

PAGE 24

* FIGURE 9: Delete and substitute new figure 9 as printed on page 3 of this amendment.

PAGE 28

* FIGURE 11: Delete and substitute new figure 11 as printed on page 4 of this amendment.

PAGE 31

* FIGURE 13: Delete and substitute new figure 13 as printed on page 5 of this amendment.

PAGE 71

* FIGURE 24: Delete and substitute new figure 24 (as added by AMENDMENT 1) as printed on page 6 of this amendment.

NOTE: The margins of this amendment are marked with asterisks to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N526)

FSC 5963


Source: https://assist.dla.mil -- Downloaded: 202610-20T16:27Z
Check the source to verify that this is the current version before use.

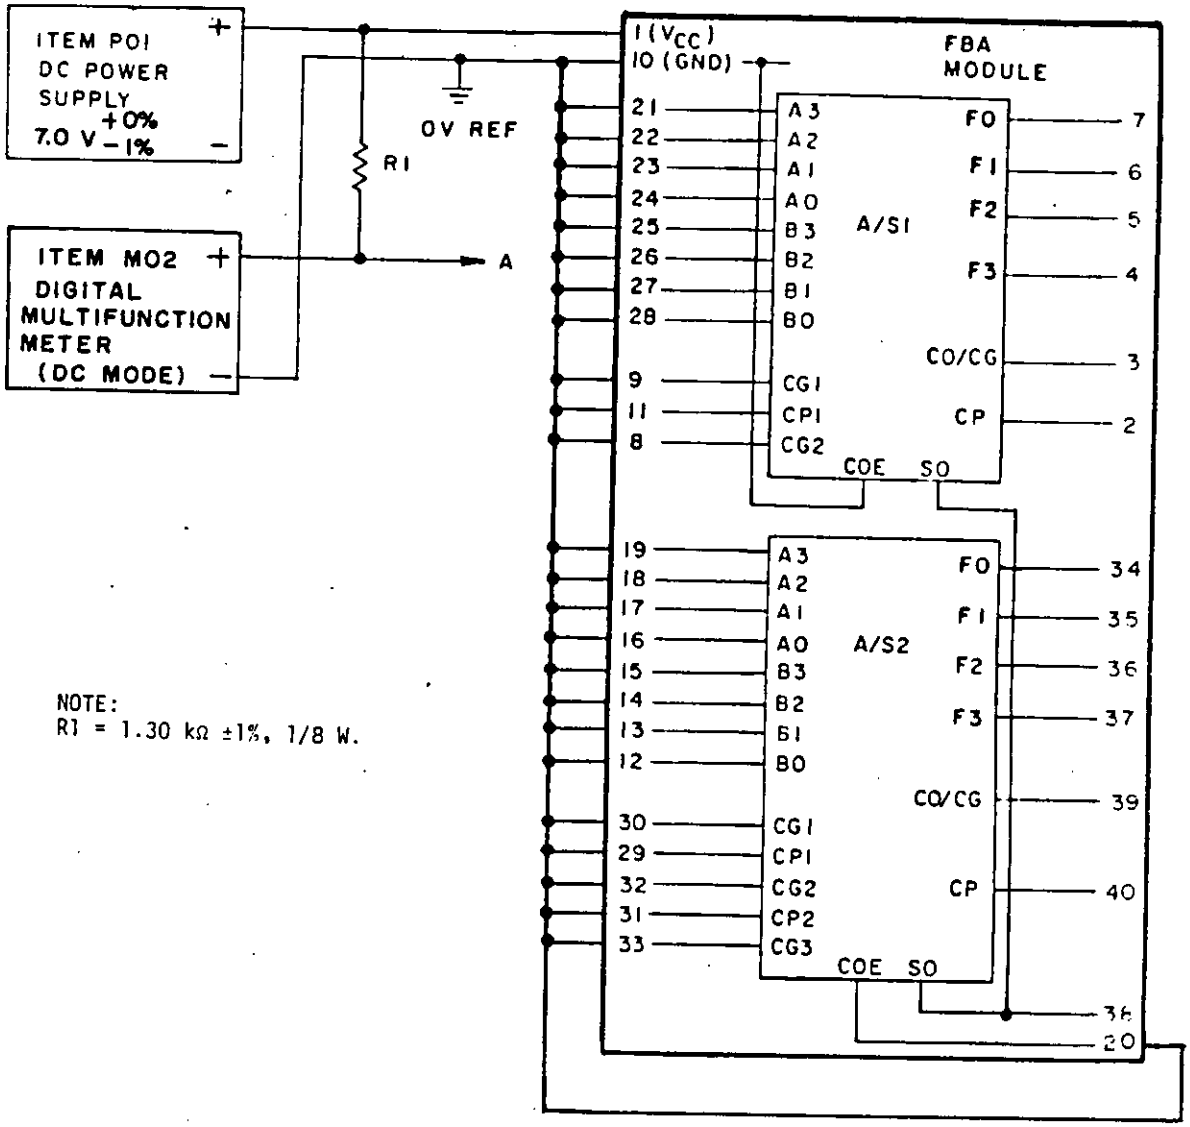

NOTE:
R1 = 1.30 kΩ ±1%, 1/8 W.

FIGURE 7. V_{OUT} (low-loaded) test circuit for table III.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.

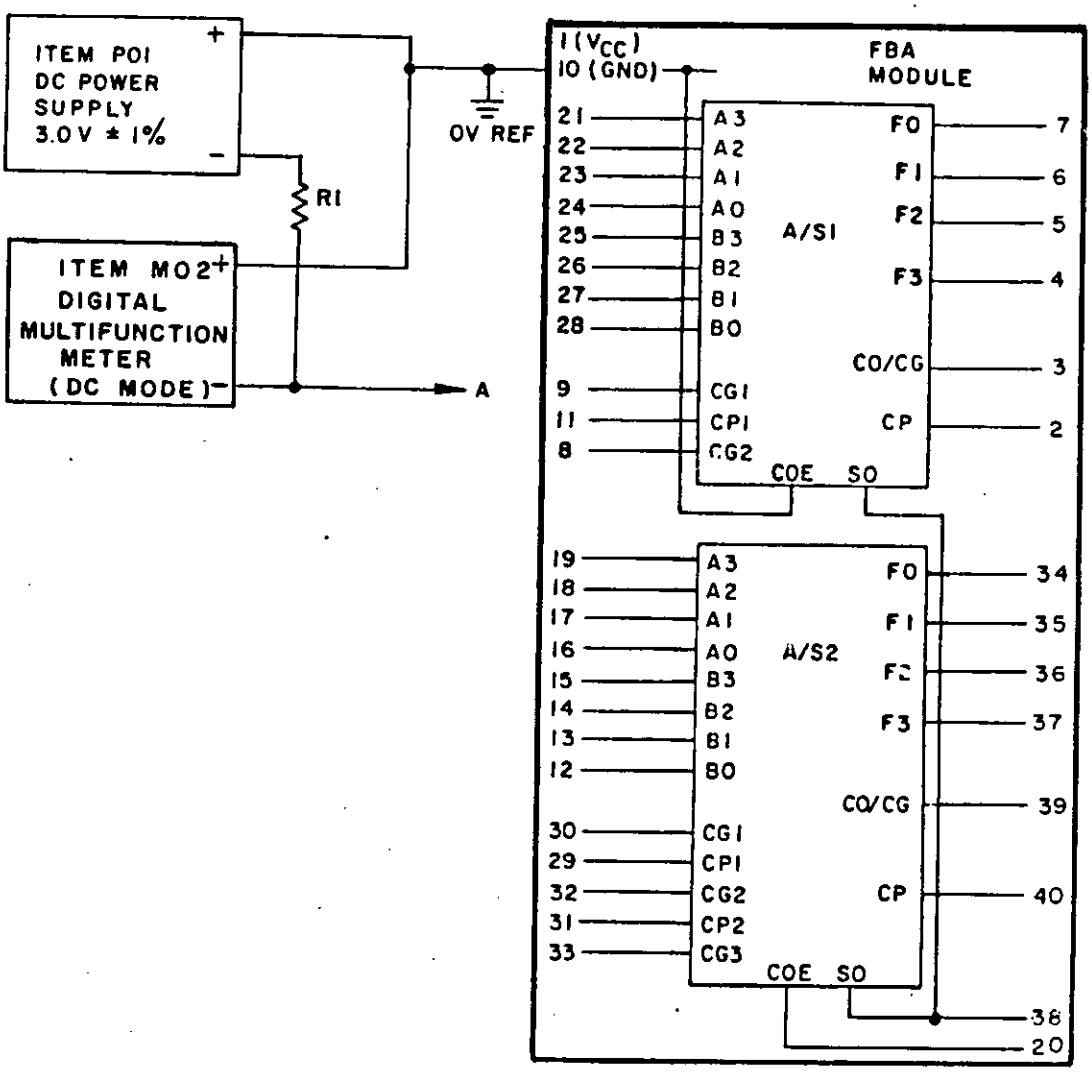

NOTE: R1 = 250Ω ±1%, 1/4 W.

FIGURE 9. Input clamp diode voltage test circuit for table V.


Source: https://assist.dla.mil Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.

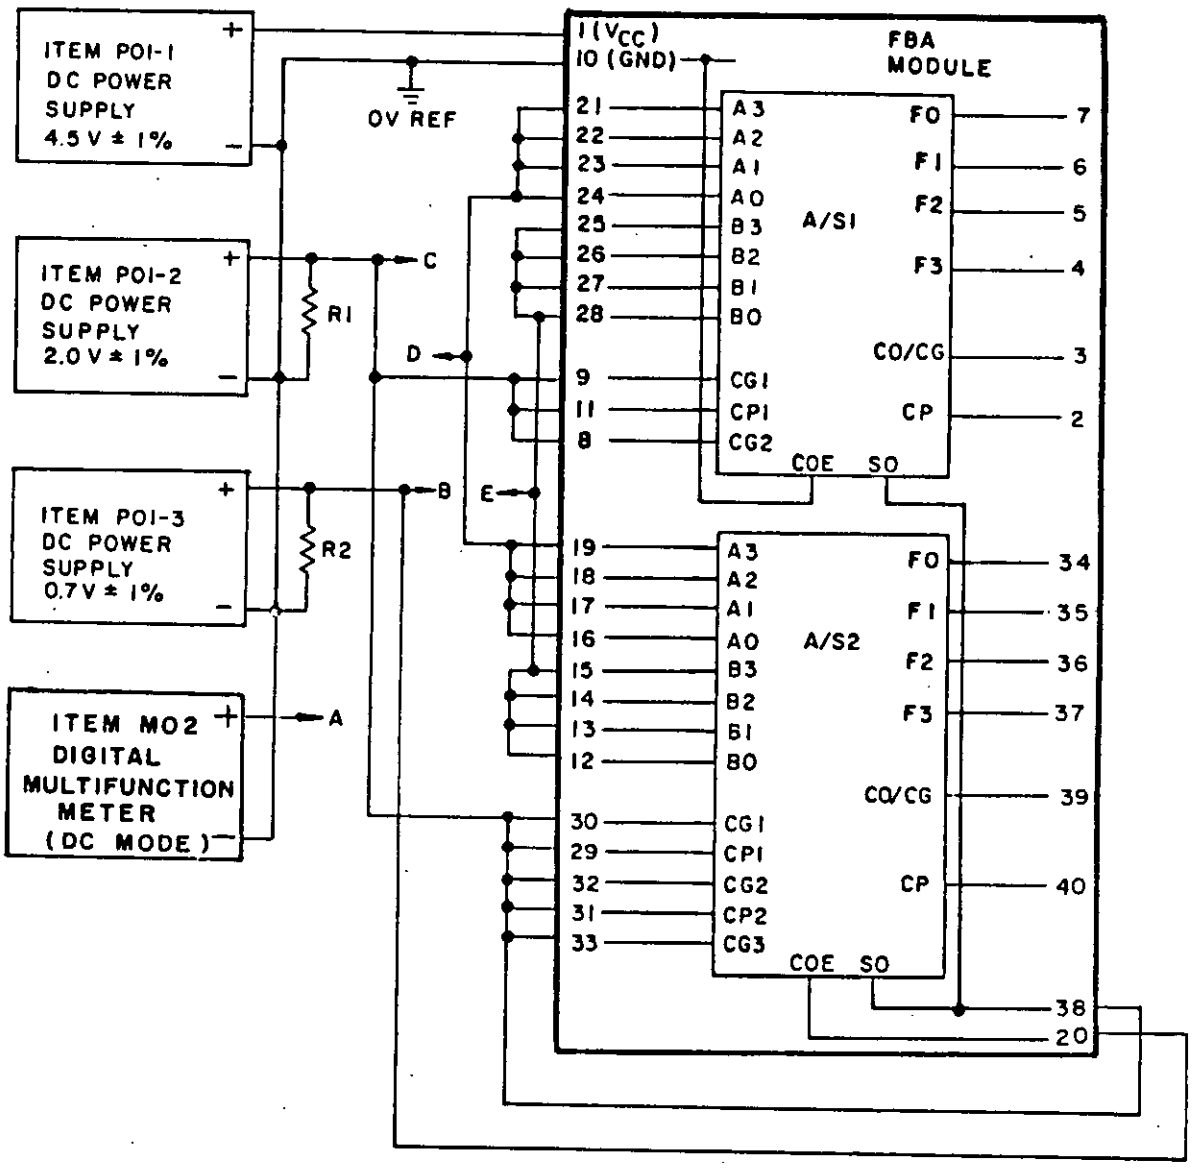

NOTES:
1. R1 = R2 = 51Ω ±5%, 1 W.
2. Load all outputs with the load as specified on figure 12.

FIGURE 11. Static output voltage (low-level) test circuit for table VII.


Source: https://assist.dla.mil -- Downloaded: 20260-20T16:27Z
Check the source to verify that this is the current version before use.

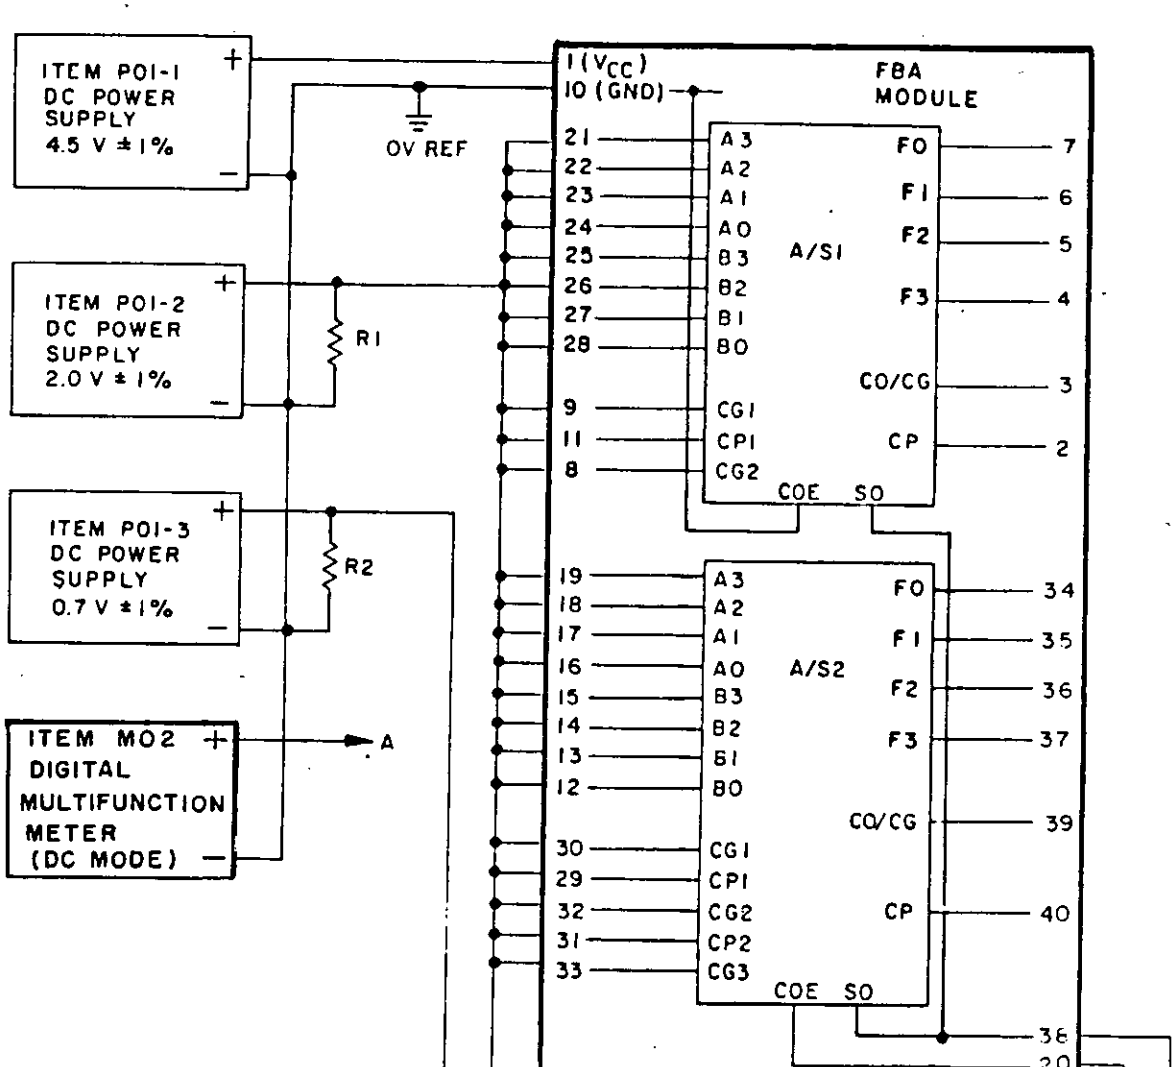

NOTES:
1. R1 = R2 = 51Ω ±5%, 1 W.
2. Load all outputs with load as specified on figure 12.

FIGURE 13. Static output voltage (high-level) test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.

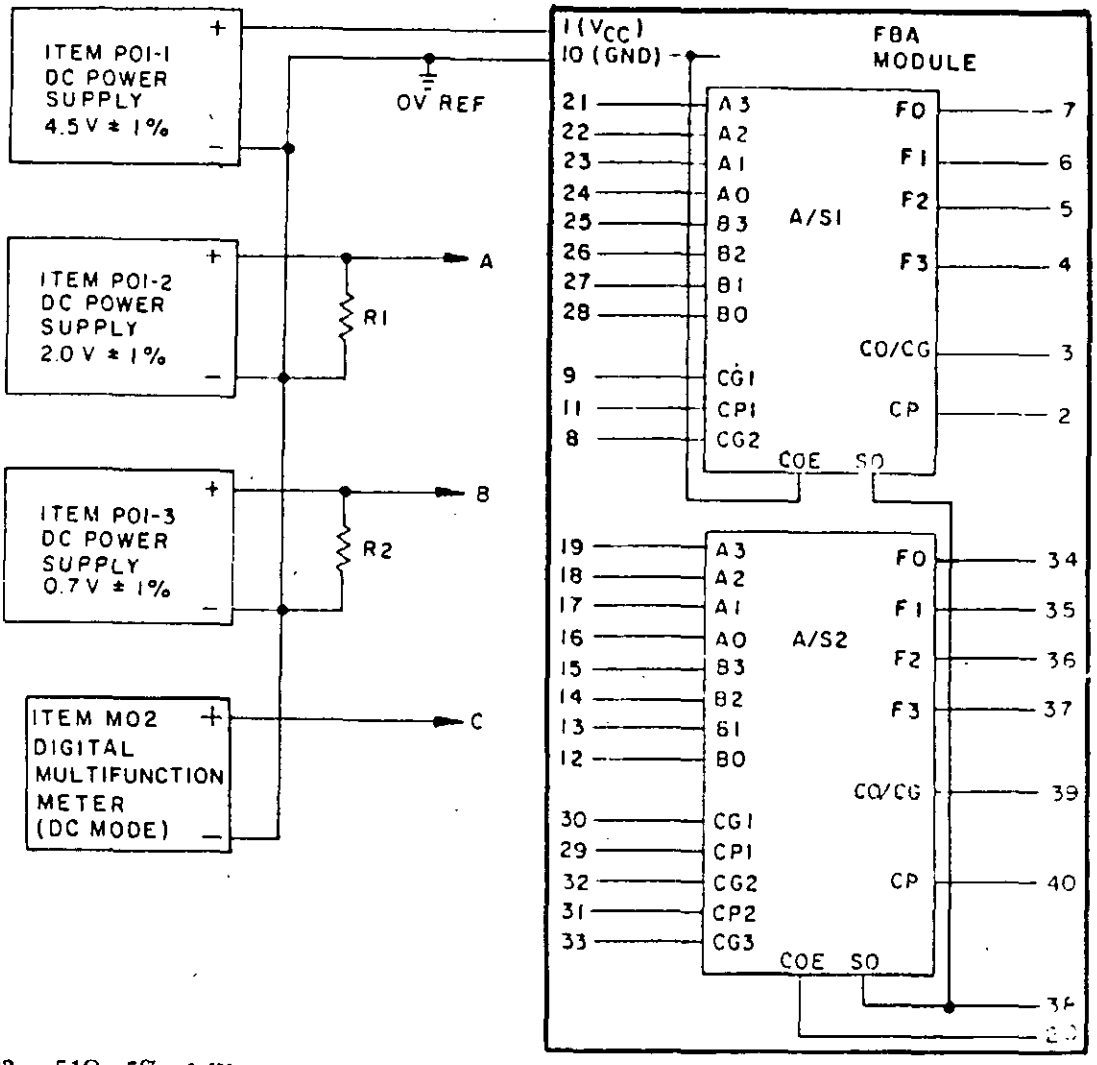

NOTES:
1. R1 = R2 = 51Ω ±5%, 1 W.
2. Load all outputs with the load as specified on figure 12.

FIGURE 24. Functional test circuit for table XXII.

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/4098

Source: https://assist.dla.mil Downloaded: 20261020T16:27Z
Check the source to verify that this is the current version before use.