INCH-POUND

MIL-M-28787/174A
AMENDMENT 3
31 March 1993
SUPERSEDING
AMENDMENT 2
5 August 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

ARITHMETIC LOGIC UNIT, DIGITAL, KEY CODE FBA

This amendment forms a part of Military Specification MIL-M-28787/174A(EC), dated 5 May 1982, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 8

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through W shall be performed in any order with the following exceptions. Test conditions A, B, C, D, and J are stress tests and shall be performed only at 25° ± 5°C. If test conditions A, B, C, D, or J are part of a sequence of tests, the order of testing shall be as follows: A, B, C, D, and J where applicable, followed by the remaining tests in the sequence."

*4.5.1, fifth and sixth lines: Delete "E through U and W" and substitute "E through H, K through U, and W".

*4.5.3, third and sixth lines: Delete "E through W" (two places) and substitute "E through H, and K through W" (two places).

PAGE 18

FIGURE 7: Delete and substitute new figure 7 as printed on page 3 of this amendment.

PAGE 24

FIGURE 9: Delete and substitute new figure 9 as printed on page 4 of this amendment.

PAGE 28

FIGURE 11: Delete and substitute new figure 11 as printed on page 5 of this amendment.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.

PAGE 31

FIGURE 13: Delete and substitute new figure 13 as printed on page 6 of this amendment.

PAGE 71

FIGURE 24: Delete and substitute new figure 24 as printed on page 7 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0160)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.

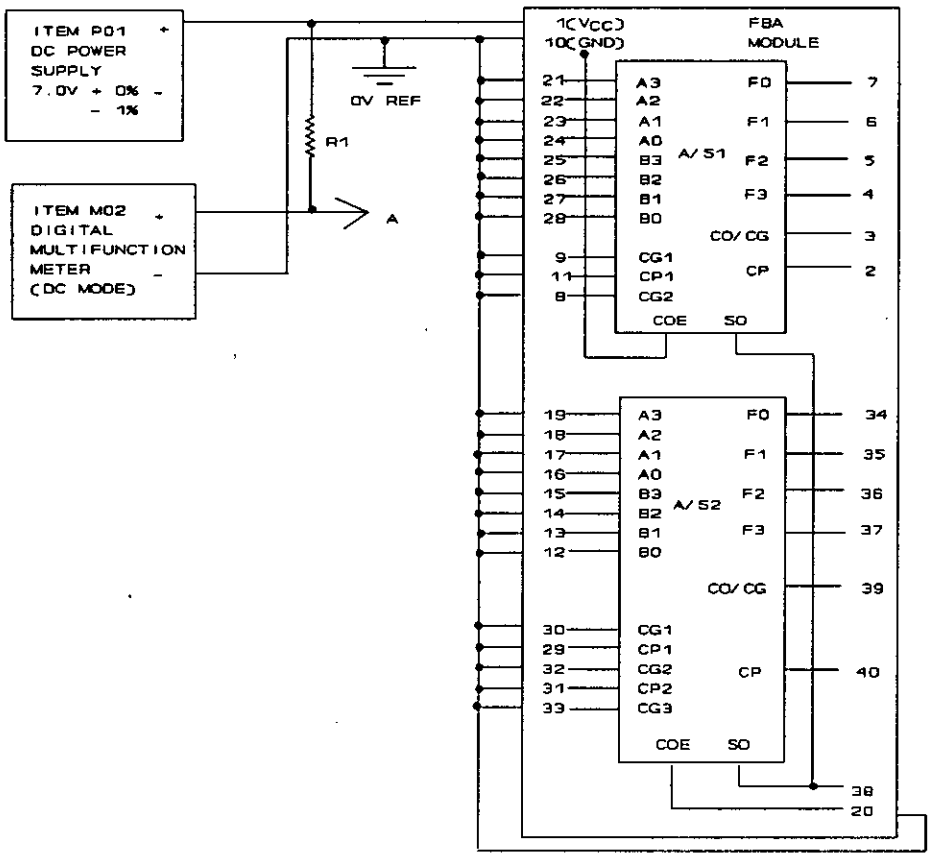

NOTE: R1 = 1.30 kΩ ± 1%, 1/8 W.

FIGURE 7. V_{OUT} (low-loaded) test circuit for table III.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.

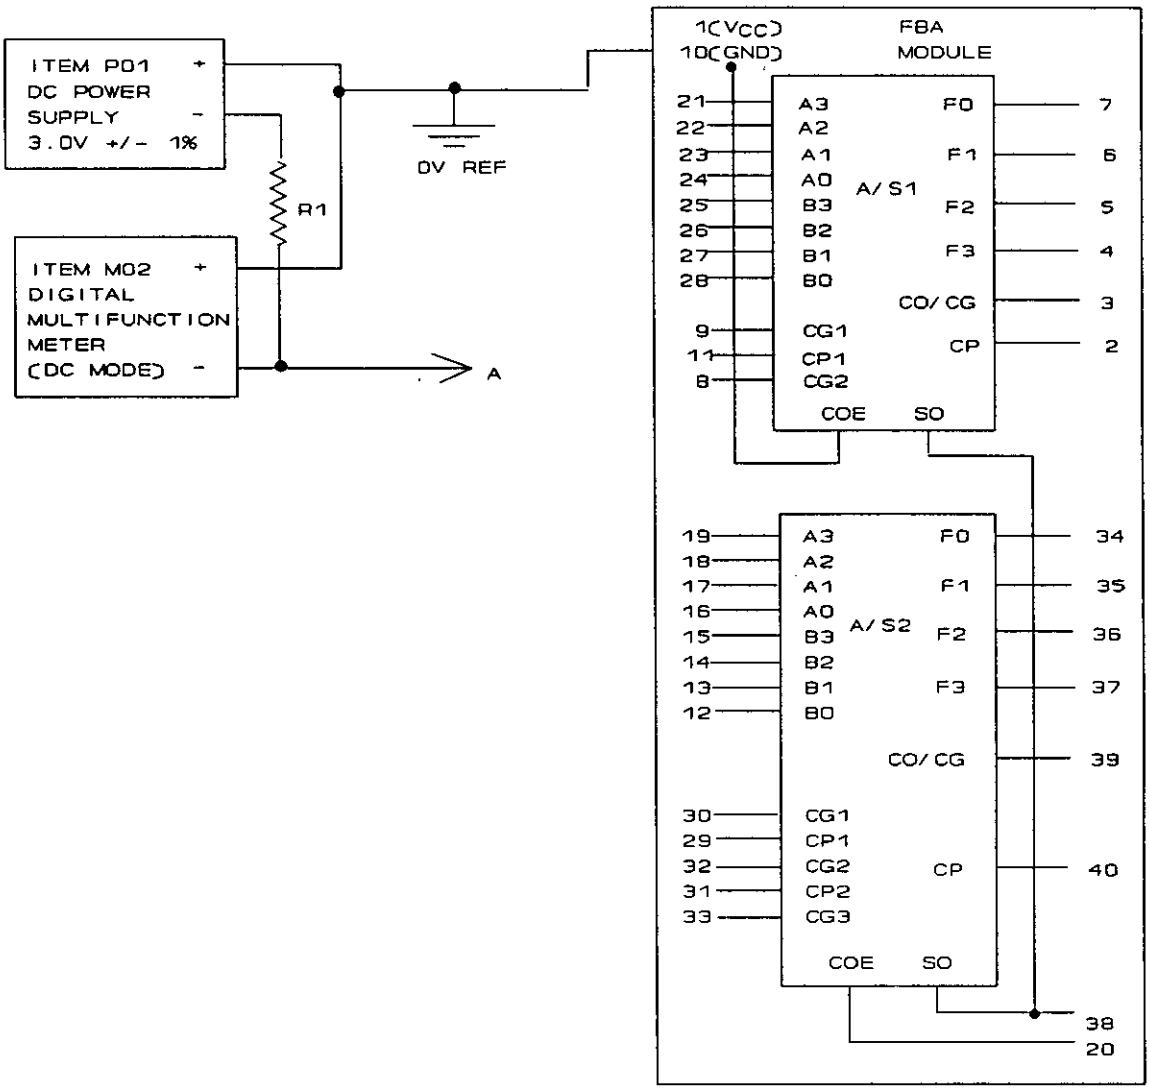

NOTE: R1 = 250Ω ± 1%, 1/4 W.

FIGURE 9. Input clamp diode voltage test circuit for table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.

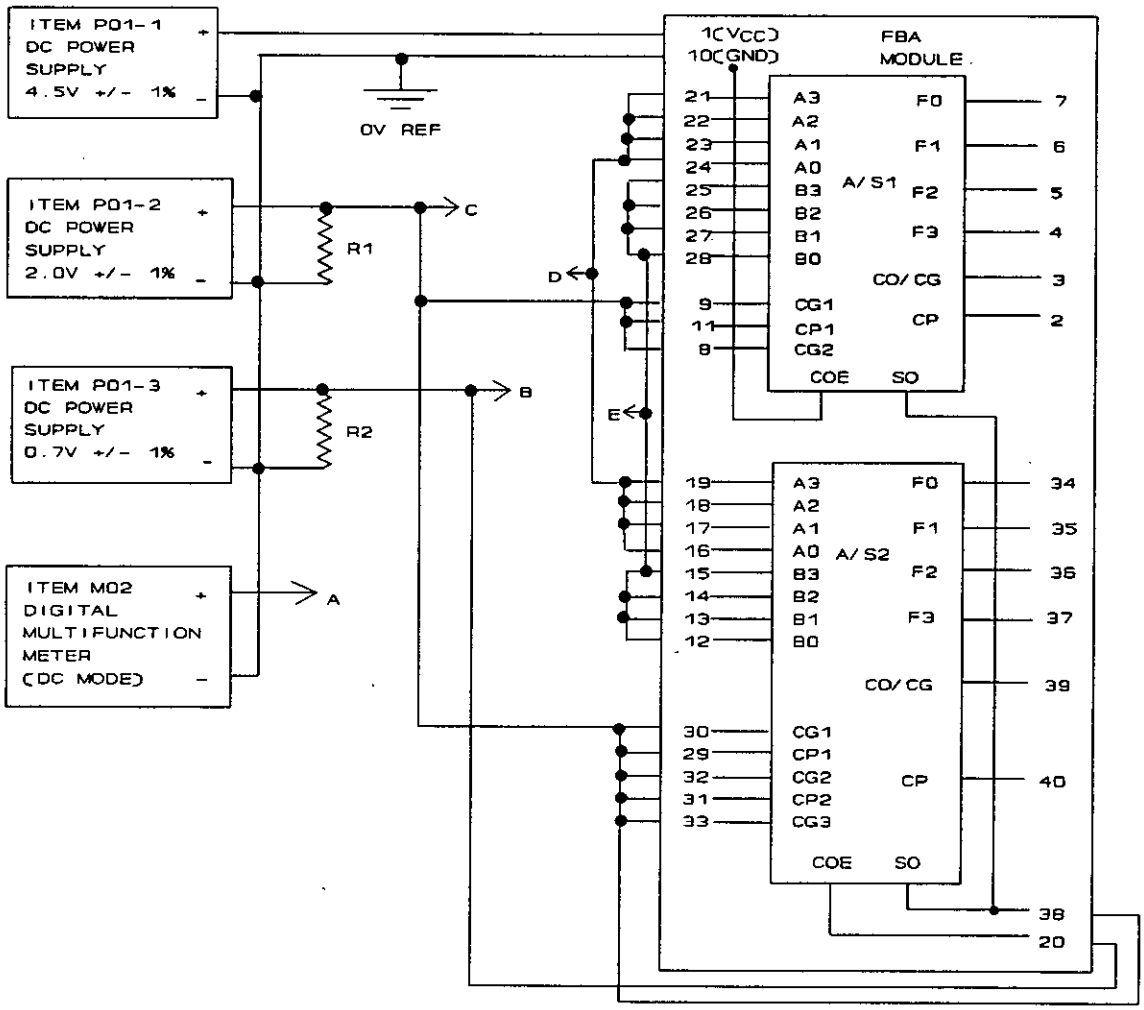


NOTES:

1. R1 = R2 = 51Ω ± 5%, 1 W.
2. Load all outputs with the load as specified on figure 12.

FIGURE 11. Static output voltage (low-level) test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.

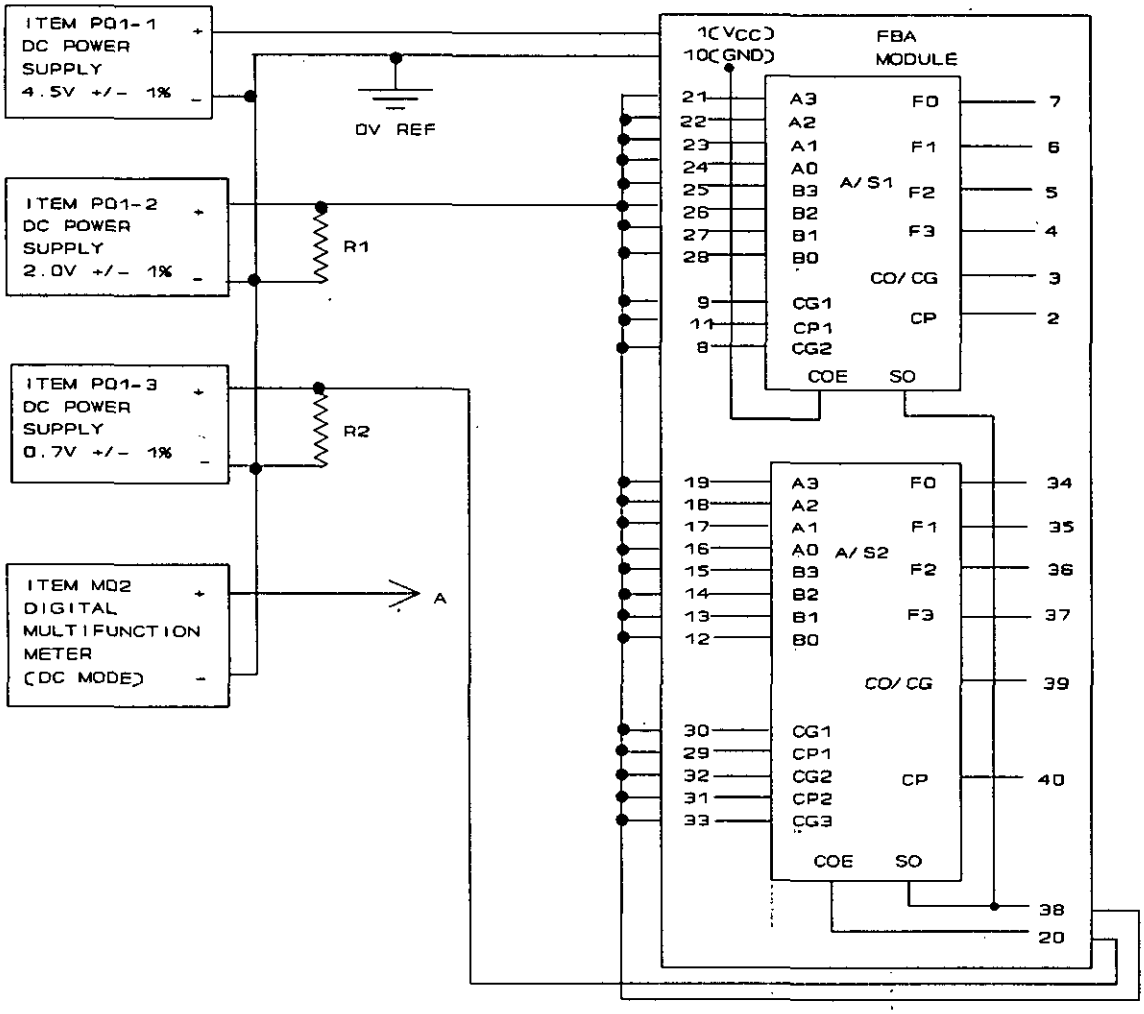


NOTES:

1. R1 = R2 = 51Ω ± 5%, 1 W.
2. Load all outputs with load as specified on figure 12.

FIGURE 13. Static output voltage (high-level) test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 20260410-20T16:27Z
Check the source to verify that this is the current version before use.

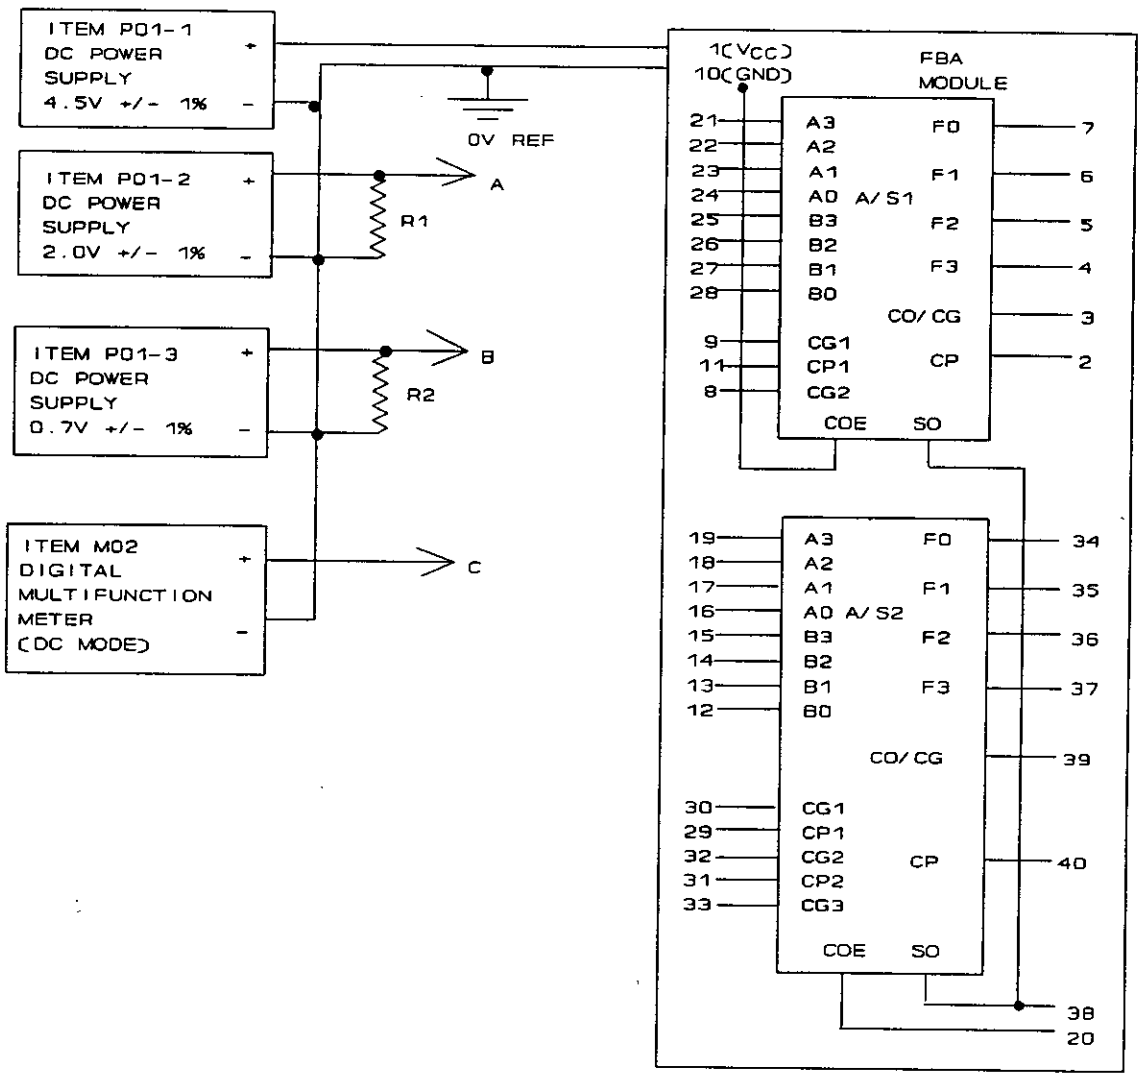

NOTES:

1. R1 = R2 = 51Ω ± 5%, 1 W.
2. Load all outputs with the load as specified on figure 12.

FIGURE 24. Functional test circuit for table XXII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:27Z
Check the source to verify that this is the current version before use.