MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, PLUG, ENVIRONMENT RESISTANT, CRIMP CONTACTS, QUADRUPLE INSERT, TYPE II, CLASS 2 (−65° C to +200° C), SERIES 2, SHELL DESIGNATOR B

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81659.

This specification is mandatory for use by all activities of the Department of the Navy.

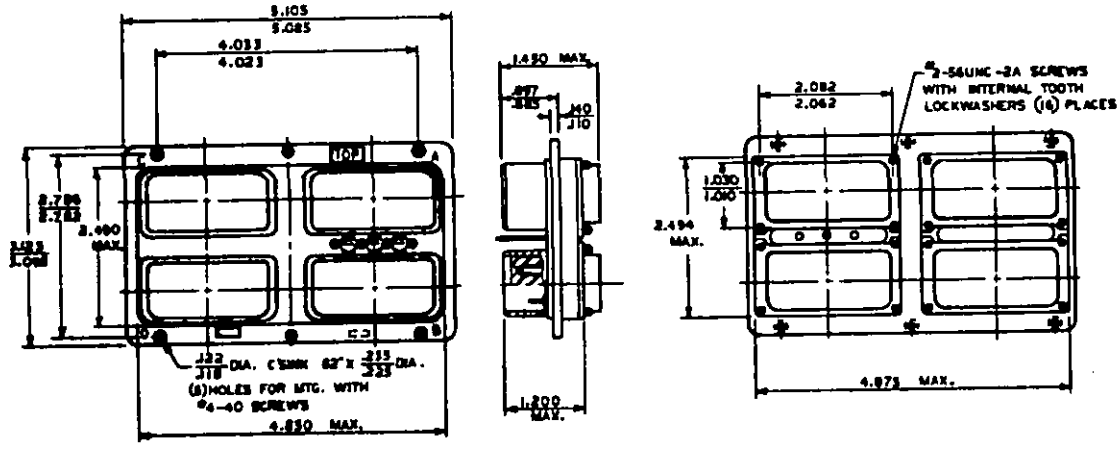

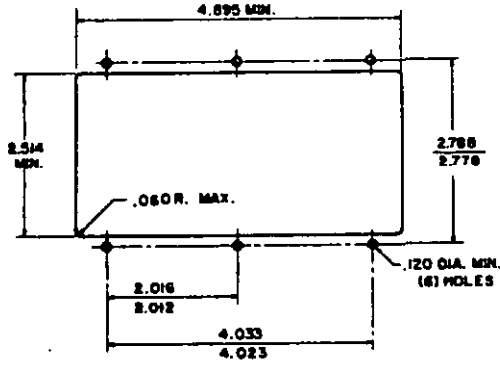

Suggested Panel Cutout Dimensions

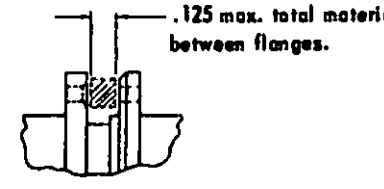

Recommended Mated Position

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:53Z
Check the source to verify that this is the current version before use.

NOTES:

1. Unless otherwise specified, dimensions in inches, tolerances: decimals ± .010.
2. Dimensions apply after plating.
3. Normal (01) polarization position shown. For alternate positions see MIL-C-81659.

REQUIREMENTS:

1. Insert arrangements shall be in accordance with MS3157.
2. Contacts shall be in accordance with MIL-C-39029/11 or MIL-C-39029/12 as applicable.
3. Insertion and removal tools shall be in accordance with MS3156.

Custodian:
Navy - AS

Preparing activity:
Navy - AS

Review activities:
Navy - EC, OS

(Project No. 5935-N-791-50)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:53Z
Check the source to verify that this is the current version before use.