MILITARY SPECIFICATION SHEET

INDICATOR, BUILT-IN-TEST (BIT), ELECTRICALLY PULSE OPERATED, THREADED MOUNTING, SINGLE AND DUAL COIL, SOLID BLACK/WHITE DATA DISPLAY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the BIT Indicators described herein shall consist of this document and the latest issue of Specification MIL-I-81663(AS).

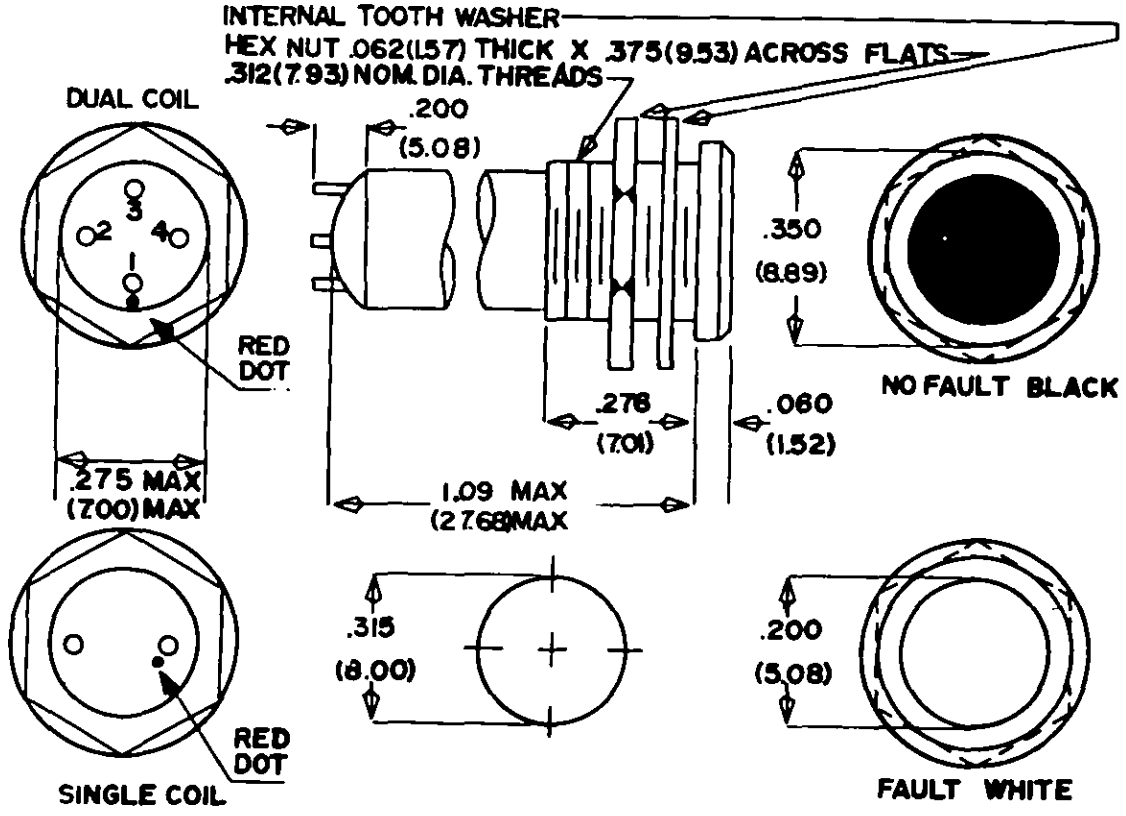

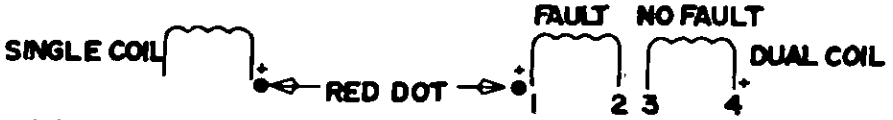

( ) DIMENSIONS ARE IN MILLIMETERS; OTHER DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .005 (.13).

NUMBERS SHOWN FOR DUAL COIL CONFIGURATION ARE FOR REFERENCE ONLY. TERMINAL STYLE IS OPTIONAL.

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:53Z
Check the source to verify that this is the current version before use.

Procurement documents should specify the title, number, and revision issue of this specification sheet and the military part number listed in Table I.

Military Part Number M81663/1	Coil Configuration	Operate Volts -55°C to +100°C MIN	NOM	MAX	Coil Resistance (minimum) In Ohms At 25°C
-01	Dual	2.5	3	3.5	12
-02	Dual	5.5	6	6.5	49
-03	Dual	9.0	12	15.0	198
-04	Dual	17.0	24	27.0	792
-05	Dual	20.0	28	30.0	1080
-06	Single	2.5	3	3.5	12
-07	Single	5.5	6	6.5	49
-08	Single	9.0	12	15.0	198
-09	Single	17.0	24	27.0	792
-10	Single	20.0	28	30.0	1080

TABLE I

REQUIREMENTS

Pulse Power: 650 milliwatts, nominal

Pulse Length: 50 milliseconds, minimum

Indicator Weight: .16 oz. or 4.5 grams, maximum

Display Presentation: FAULT color (white) is displayed by applying the appropriate pulse voltage listed in Table I with positive polarity applied to the indicator terminal marked with a red dot. NO FAULT color (black) is displayed:

1. By reversing the polarity of the applied pulse voltage for SINGLE COIL indicators.

2. For DUAL COIL indicators, the appropriate voltage pulse listed in Table I is applied to the NO FAULT coil observing the polarity shown in the schematic.

Custodian:

Navy - AS

Preparing Activity:

Navy - AS

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973 -713-147/1804

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:53Z
Check the source to verify that this is the current version before use.