MIL-D-10254C
30 June 1975
SUPERSEDING
MIL-D-10254B
29 June 1968

MILITARY SPECIFICATION

DECORATION, NETHERLANDS ORANGE LANYARD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the Netherlands Orange Lanyard Decoration consisting of a braided cotton cord with self bound loops at each end and a swivel snap attached to one of the loops.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS
FEDERAL
V-T-276 - Thread, Cotton
PPP-B-636 - Box, Shipping, Fiberboard
PPP-B-676 - Boxes, Set-Up
STANDARDS
FEDERAL
Fed. Test Method Std. No. 191 - Textile Test Methods
MILITARY
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

MIL-STD-129 Marking for Shipment
DRAWINGS
THE INSTITUTE OF HERALDRY
B-10-12 - Decoration, Netherlands Orange Lanyard

/FSC 8455/

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards and drawings required by the contractor in connection with a specific procurement function should be obtained from the procuring activity or as directed by the contracting officer.) (Figure 1 is a miniature reproduction of drawing B-10-12 and is attached for information purposes.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

DOD Standard Color Card of Official Standardized Shades for Heraldic Yarns for Embroidery and Ribbons, 1974

(Application for copies of the aforementioned document should be addressed to The Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

3. REQUIREMENTS

3.1 Samples.-

3.1.1 Guide sample.- Unless otherwise specified (see 6.2), a guide sample of the finished lanyard shall be furnished for guidance and information only. When variation occurs between the guide sample and this specification, the requirements of this specification shall govern.

3.1.2 Standard sample.- Unless otherwise specified (see 6.2), a standard sample of the cotton yarn for the cover shall be furnished for matching colorfastness only.

3.2 First article.- When specified (see 6.2), before production is commenced, a sample of the finished lanyard shall be submitted or made available to the contracting officer or his authorized representative for inspection and tests as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured in the same manner and in the same facilities to be used for the manufacture of the production item.

3.3 Materials.-

3.3.1 Cotton yarn.- The cotton yarn shall be a suitable grade and of sufficient fiber length to meet the final requirements. The yarn used for the cord cover and the cover of the wrapping cord shall be 20/2 ply, combed mercerized yarn. The stuffer yarn shall be 9/3 corded yarn.

3.3.1.1 Color.- The stuffer yarn for the cord and tubular wrapping cord shall be natural or bleached. The yarn for the cover shall be dyed to match Burnt Orange HAY, Cable No. 67149 (see 2.2). The use of sulfur dyes or dyes containing elementary sulfur or compounds capable of oxidization to sulfuric acid is prohibited. When tested as specified Table I, there shall be no stain showing on the filter paper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

3.3.1.1.1 Matching.- The color shall be matched to the standard under natural daylight (North Sky) or artificial daylight having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the standard under incandescent lamplight at 2800 degrees Kelvin.

3.3.1.1.2 Colorfastness.- The dyed yarns shall show good colorfastness to combined bleaching and laundering, wet-dry cleaning and light.

3.3.2 Thread.- The thread for binding the loops shall be cotton, unbleached conforming to type IA1, 3 ply, ticket No. 30 of V-T-276.

3.4 Details of components.-

3.4.1 Cord.- The finished cord shall consist of a braided cotton cover over sufficient cotton stuffer yarns to insure a diameter of 3/16 inch plus or minus 1/32 inch. The cotton cover shall be braided on a 16 carrier machine three ends per carrier of yarn specified in 3.3.1 with not less than 24 picks per inch in a two over two under plain braid.

3.4.2 Wrapping Cord.- The finished wrapping cord shall consist of a tubular braided cover over sufficient stuffer yarn to insure a diameter of 3/32 inch plus or minus 1/32 inch. The cotton cover shall be braided on an 8 carrier machine, two ends per carrier from yarn specified in 3.3.1, with not less than 14 picks per inch in a one over, one under, basket braid.

3.4.3 Swivel snap.- The swivel snap shall be made from any type brass and shall conform to the details and dimensions of drawing B-10-12. The swivel snap shall be 24 karat gold plated and completely lacquered.

3.5 Construction.- The lanyard shall be constructed in accordance with the details and dimensions shown on drawing B-10-12, identified as figure 1 and the requirements specified herein. The lanyard shall have a loop at each end. The loops shall have an inside measurement of 1 inch plus or minus 1/8 inch and the swivel snap shall be attached to one of the loops. The loops shall be formed by folding the cord on itself and binding it with not less than 4 turns or more than 6 turns of thread specified in 3.3.2. The ends of the thread shall be securely fastened. After the loops have been formed, the ends shall be wrapped with not less than seven or more than nine turns of wrapping cord specified in 3.4.2 with the loose ends tucked and securely fastened under the turns of the wrapping cord. The finished overall length of the lanyard, excluding the swivel snap shall be 34 inches plus or minus 1/2 inch.

3.6 Workmanship.- The lanyard shall be clean, well made and shall meet the quality levels established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.2 First article inspection.- Inspection and testing of the first article shall be made on a completely finished lanyard for all provisions of this specification applicable to end product examination and test.

4.3 Inspection for acceptance.- Inspection shall be in accordance with provisions set forth in MIL-STD-105, except when otherwise specified hereafter.

4.3.1 Testing of components.- In addition to the quality assurance provisions of the subsidiary specifications and drawings, components shall te tested as specified in table I. When data in the "#determ per s/u" and "Results reported as" columns are not specified in table I, they shall be as required by the individual test method specified in Fed-Std-191. All requirements are applicable for the individual sample. The inspection level shall be S-1 and the acceptable quality level for sample unit requirements shall be 6.5 defects per hunderd units. The sample unit for these tests shall be one cone, spool or tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

TABLE I Component testing.-

Component	Characteristic	Rqm't para	Test method	*determ per s/u	Results reported as
Cotton yarn for cord cover	Material ident	3.3.1	Std Com'l	1	Pass or fail
	Size of yarn	3.3.1	Std Com'l	1	Pass or fail
	Sulfur content	3.3.1.1	2020 1/	1	Pass or fail
	Color	3.3.1.1	Visual	1	Pass or fail
	Colorfastness to:				
	Combined bleaching and laundering	3.3.1.1.2	5605 3/		
	Wet-dry cleaning	3.3.1.1.2	4622		
	Light 2/	3.3.1.1.2	4660		
Cotton yarn for stuffer ends	Material ident	3.3.1	Std Com'l	1	Pass or fail
	Size of yarn	3.3.1	Std Com'l	1	Pass or fail
Cord	Diameter	3.4.1	Std Com'l	1	To nearest 1/32 inch
	Tubular braid	3.4.1	Visual	1	Pass or fail
	Number of carriers	3.4.1	Visual	1	To nearest whole number
	Ends per carrier	3.4.1	Std Com'l	1	To nearest whole number
	Picks per inch	3.4.1	Std Com'l	2	Aver. of 2 determ to nearest whole number
	Weave	3.4.1	Visual	1	Pass or fail
Wrapping	Diameter	3.4.2	Std Com'l	1	To nearest 1/32 inch
	Tubular braid	3.4.2	Visual	1	Pass or fail
	Number of carriers	3.4.2	Visual	1	To nearest whole number
	Ends per carrier	3.4.2	Std Com'l	1	To nearest whole number
	Picks per inch	3.4.2	Std Com'l	2	Aver. of 2 determ to nearest whole number
	Weave	3.4.2	Visual	1	Pass or fail
Swivel	Gold plated 1/	3.4.3	Std Com'l	1	Pass or fail
	Lacquered 1/	3.4.3	Std Com'l	1	Pass or fail

1/ Requirements accepted on basis of manufacturer's certification of compliance.
2/ The time exposure shall be 80 standard fading hours.
3/ Except that the hyochiorite solution shall be diluted to 1.0 percent available chlorine in lieu of 1.5 percent and the 100 steel balls required shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

4.3.2 Inspection of end item.-

4.3.2.1 Visual examination of lanyard.- The defects found during examination shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. The sample unit for this examination shall be one completely fabricated lanyard.

4.3.2.1.1 Examination of lanyard for defects in material, construction and workmanship.- Defects designated by an asterisk (*) shall be classified major when seriously affecting serviceability or appearance and minor when affecting serviceability or appearance but not seriously.

Examine	Defect	Classification		
		Major	(*)	Minor
Cords				
	Not fabricated from the specified material.....	x	-	-
	Spotted, stained, discolored or soiled.....	-	*	-
	Objectionable odor.....	-	-	x
	Cut or tear.....	x	-	-
	Broken, missing ends or picks.....	x	-	-
	Pulled threads.....	-	*	-
	Frayed edges.....	-	*	-
	Core not completely coverd.....	-	*	-
	Core out of round.....	-	*	-
	Cords not continuous length, i,e., pieced.....	x	-	-
Construction	Loop missing.....	x	-	-
	Not formed as specified.....	-	*	-
	Ends wrapped with less than 7 or more than 9 turns of wrapping cord.....	-	*	-
	Free cord ends not secured as specified.....	x	-	-
	Loop bound with less than 4 or more than 6 turns of thread.....	-	*	-
Swivel snap	Swivel snap missing.....	x	-	-
	Swivel snap damaged or deformed.....	-	*	-
	Improper size.....	-	*	-
	Not plated as specified.....	x	-	-
	Not lacquered as specified.....	-	-	x

4.3.2.1.2 Examination of lanyard for defects in dimensions.- Any dimension that is not within the specified tolerance shall be classified as a defect.

4.3.2.1.3 Inspection levels and acceptable quality levels (AQL's).- The inspection levels and the AQL's expressed in defects per hundred units shall be as follows:

	Inspection Level	AQL Major	AQL Total
For defects applicable to 4.3.2.1.1	II	2.5	6.5
For defects applicable to 4.3.2.1.2	S-3	---	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of preparation for delivery requirements.- An examination shall be made to determine that applicable packaging, packing and marking requirements are complied with. Defects shall be scored in accordance with the list below. The s/u shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item shipping lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hunderd units.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Content	Number of lanyards per intermediate package is more or less than required. 1/

1/ For this defect, 3 intermediate packages shall be examined from each shipping container in the sample.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Unit packaging.- Each lanyard shall be folded to measure approximately 8 inches in length and shall be placed in a snug-fitting transparent polyethylene bag and heat sealed. The polyethylene film shall be a minimum of .002 inch thick. All seams and closures shall be heat sealed. Prior to or during the sealing operation all excess air within the bag shall be expelled.

5.1.1.2 Intermediate packaging.- One hundred (100) lanyards packaged as specified in 5.1.1.1 shall be packaged in a snug-fitting, set-up paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676. Box closure shall be in accordance with the appendix of the container specification.

5.1.2 Level C.- Lanyards shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving station for immediate use or controlled humidity storage. The supplier may use his standard practice when it meets these requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.- Lanyards packaged as specified in 5.1, shall be packed in a snug fitting fiberboard shipping container conforming to class Weather Resistant V3s or V3c of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the size and weight limitations of the container specification.

5.2.2 Level B.- Lanyards packaged as specified in 5.1., shall be packed in a snug-fitting fiberboard box conforming to class Domestic, grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the size and weight limitations of the container specification.

5.2.3 Level C.- Lanyards packaged as specified in 5.1, shall be packed in a manner to assure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. Containers shall be in accordance with the rules and regulations of the carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The white paper label shall contain the following information:

STOCK NUMBER
NOMENCLATURE
MANUFACTURER'S NAME
CONTRACT NUMBER

6. NOTES


6.1 Intended use.- The Netherlands Orange Lanyard covered by this specification is intened to be worn by Military personnel who meet the award criteria established for this decoration.

6.2 Ordering data.- Procurement documents should specify the following:
(a) Title, number and date of this specification.
(b) When a guide sample will not be furnished (see 3.1.1).
(c) When a standard sample will not be furnished (see 3.1.2).
(d) When a first article is required (see 3.2).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Custodians:
Army - IH
Air Force - 82
Review Activities:
Air Force - 82, 85
Other - DP
User Activity:
Army - SM
Project No. 8455-0195

Preparing Activity:
The Institute of Heraldry
United States Army

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

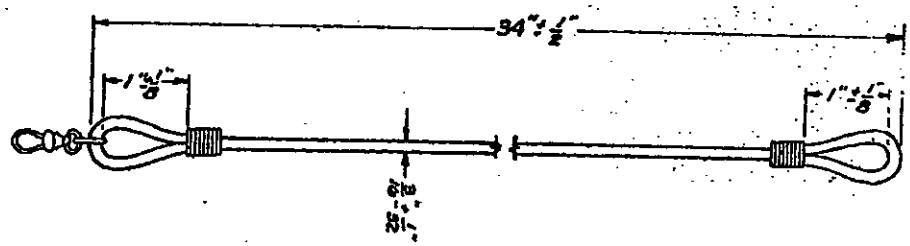

DECORATION:
NETHERLANDS ORANGE
LANYARD

☆ U. S. GOVERNMENT PRINTING OFFICE: 1975 -603-766/0563

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.