NOT MEASUREMENT SENSITIVE

MIL-DTL-10254D
24 June 2026
SUPERSEDING
MIL-D-10254C
30 June 1975

MILITARY SPECIFICATION

DECORATION, NETHERLAND ORANGE LANYARD

This specification is approved for use by all
Department and Agencies of the Department of Defense

1 SCOPE

1.1 Scope. This specification covers the Netherlands Orange Lanyard Decoration consisting of braided cotton cord with self-bound loops at each end and a swivel snap attached to one of the loops.

2. APPLICABLE PUBLICATIONS

2.1 Government documents.

2.1.1 The documents listed in this section are specified in sections 3 and 4. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether they are listed.

FEDERAL SPECIFICATION

A-A-52094 -	Thread, Cotton
PPP-B-676 -	Boxes, set-up

FEDERAL STANDARD

FED-STD-191 -	Textile, Test Methods

Comments, suggestions, or questions on this document should be addressed to The Institute of Heraldry, ATTN: Technical and Production Division at usarmy.belvoir.hqda.mil.tioh-webmaster@army.mil. You may verify the currency of this specification using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

MIL-STD-1916 - DOD Preferred Methods for acceptance of Product.
MIL-STD-129 - Marking for Shipment.

(Copies of these documents are available online at https://quicksearch.dla.mil)

(Copies of these documents are available online at https://assist.mil)

2.1.2 Other Government documents. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS
THE INSTITUTE OF HERALDRY (TIOH)

B-10-12 - Decoration, Netherlands Orange Lanyard

(Copies of standards, drawings and chip sets are available from TIOH, ATTN: Technical and Production Division @ usarmy.belvoir.hqda.mi.tioh-webmaster@army.mil.)

2.2 Non-Government publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM-D5118/D5118M - Boxes, Fiberboard Shipping, Fabrication of
ASTM-D1974/D1974M - Fiberboard, Boxes, Methods of Closing and Sealing and Reinforcing

Unless otherwise indicated, copies of the ASTM document are available from ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or http://www.astm.org)

THE COLOR ASSOCIATION OF THE UNITED STATES

The Standard Color Reference of America, Tenth Edition

United States Army Color Card, The official Colors for Branches, Agencies, etc.

DOD Standard Color or Official Standardized Shades for Sewing Threads, 1968.

AMERICAN AND EFIRD, LLC

DoD Standard Shades for Heraldic Yarns, 2012 Edition

(Copies for these documents are available online at sales@elevatetextiles.com)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

(Application for copies of the color cards should be addressed to the Association of the United States, 343 Lexington Avenue, New York, NY 10016-1187.)

3 REQUIREMENTS

3.1 Samples

3.1.1 Guide sample. Unless otherwise specified (see 6.2), a guide sample of the furnished lanyard shall be furnished for guidance and information only. When variation occurs between the guide sample and this specification, the requirements of this specification shall govern.

3.1.2 Standard sample. Unless otherwise specified (see6.2), a standard sample of the cotton yarn for the cover shall be furnished for matching colorfastness only.

3.2 First article. When specified (see 6.2), before. Production is commenced; a sample of the finished lanyard shall be submitted or made available to the contracting officer or his authorized representative for inspection and tests as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provision of this specification. The first article shall.be manufactured in the same manner and in the same facilities to be used for the manufacture of the production item.

3.3 Materials.

3.3.1 Cotton Yarn. The cotton yarn for the cord shall be a suitable grade and of sufficient fiber length to meet the final requirements. The yarn used for the cord cover and the cover of the wrapping cord shall be 20/2 ply, combed mercerized yarn. The staffer yarn shall be 9/3 corded yarn.

3.3.1.1 Color. The stuffer yarn for the cord and tubular wrapping cord shall be natural or bleached. The yarn for the cover shall be dyed to match bunt orange hay cable 67149 (see 2.2). The use of sulfur dyes or dyes containing elementary sulfur compounds capable of oxidization to sulfuric acid is prohibited. When tested as specified in Table I, there shall be no stain showing on the filter paper.

3.3.1.1.1 Matching. The color shall be matched to the standard under natural daylight (North Sky) or artificial daylight having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the standard under incandescent lamplight at 2800 degrees Kelvin.

3.3.1.1.2 Colorfastness. The dyed yarns shall show good colorfastness to combine bleaching and laundering, wet-dry cleaning and light.

3.3.2 Thread. The thread for binding the loops shall be cotton, unbleached conforming to type IA1, 3 ply A-A-52094.

3.4 Details of components.

3.4.1 Cord. The finished cord shall consist of a braided cotton cover over sufficient cotton stuffer yarns to ensure a diameter of 3/16 inch plus or minus 1/32 inch. The cotton

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

cover shall be braided on a 16 carrier machine with three ends per carrier of yarn specified in 3.3.1 with not less than 24 picks per inch in a two over two under plain braid.

3.4.2 Wrapping cord. The finished wrapping cord shall consist of a tubular braided cover over sufficient stuffer yarn to ensure a diameter of 3/32 inch plus or minus 1/32 inch. The cotton cover shall be braided on an 8 carrier machine, two ends per carrier from yarn specified in 3.3.1, with not less than 14 picks per inch in a one over, one under, basket braid.

3.4.3 Swivel snap. The swivel snap shall be made from any type of brass and shall conform to the details and dimensions of drawing B-10-12. The swivel snap shall be 24K gold plated and completely lacquered.

3.5 Construction. The lanyard shall be constructed in accordance with the details and dimensions shown on drawing B-10-12, identified as figure 1 and the requirements specified herein. The lanyard shall have a loop at each end. The loops shall have an inside measurement of 1 inch plus or minus 1/8 inch and the swivel snap shall be attached to one of the loops. The loops shall be formed by folding the cord on itself and binding it with not less than 4 turns or more than 6 turns of thread specified in 3.3.2. The ends of the thread shall be securely fastened. After the loops have been formed, the ends shall be wrapped with not less than seven or more than nine turns of wrapping cord specified in 3.4.2 with the loose ends tucked and securely fastened under the turns of the wrapping cord. The finished overall length of the lanyard, excluding the swivel snap shall be 34 inches plus or minus ½ inch.

3.6 Workmanship. The lanyard shall conform to the quality of product established by the document and the occurrence of defects shall not exceed the applicable acceptance quality levels.

4 VERIFICATIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.2 First article inspection. Inspection and testing of the first article shall be made on a finished lanyard for all provisions of this specification applicable to end product examination and test.

4.3 Inspection for acceptance. Inspection shall be in accordance with provision set forth in MIL-STD-105, except when otherwise specified hereafter.

4.3.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, components shall be tested as specified in Table I. When data When data in the “determ per a/u “ and “Results reported as” columns are not specified in Table II, they shall be as required by the individual test method specified in

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

FED- STD-191. All requirements are applicable for the individual sample. The inspection level shall be S-1 and the acceptable quality level for sample unit requirements shall be 6.5 defects per hundred units. The sample unit for these tests shall be one cone, spool or tube.

TABLE I. Component Testing

Component	Characteristics	Requirement Paragraph	Test Method	*Determ per s/u	Results reported as
Cotton yarn for cord cover	Material ident	3.3.1.	Std. Com'1	1	Pass or fail
	Size of yarn	3.3.1.	Std. Com'1	1	Pass or fail
	Sulfur content	3.3.1.1	2020 1/ Visual	1	Pass or fail
	Color	3.3.1.1		1	Pass or fail
	Colorfastness to: Combined bleaching and laundering	3.3.1.1.2	5605 3/		
	Wet-dry cleaning	3.3.1.1.2	4622		
	Light 2/	3.3.1.1.2	4660		
Cotton yarn for stuffer ends	Material Ident.	3.3.1	Std. Com'1	1	Pass or fail
	Side of yarn	3.3.1	Std. Com'1	1	Pass or fail
Cord	Diameter	3.4.1	Std. Com'1	1	To nearest 1/32"
	Tubular braid	3.4.1	Visual	1	Pass or fail
	Number of carrier	3.4.1	Visual	1	To nearest whole number
	Ends per carriers	3.4.1	Std. Com'1	1	To nearest whole number
	Picks per inch	3.4.1	Std. Com'1	2	Aver. of 2 determ to nearest whole number
	Weave	3.4.1	Visual	1	Pass or fail
Wrapping	Diameter	3.4.2	Std. Com'1	1	Nearest 1/32"
	Tubular braid	3.4.2	Visual	1	Pass or fail
	No. of carriers	3.4.2	Visual	1	To nearest whole number
	Ends per carrier	3.4.2	Std. Com'1	1	To nearest whole number
	Picks per inch	3.4.2	Std. Com'1	2	Aver. 2 determ to nearest
	Weave	3.4.2	Visual	1	Pass or fail
Swivel	Gold plated 1/	3.4.3	Std. Com'1	1	Pass or fail
	Lacquered 1/	3.4.3	Std. Com'1	1	Pass or fail

1/ Requirements accepted on basis of manufacture's certification of compliance.
2/ The time exposure shall be 80 standard fading hours.
3/ Except that the hypochlorite solution shall be diluted to 1.0 percent available chlorine in lieu of 1.5 percent and the 100 steel balls required shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

4.3.2 Inspection of end item.

4.3.2.1 Visual examination of lanyard. The defects found during examination shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. The sample unit for this examination shall be completely fabricated lanyard.

4.3.2.1.1 Examination of lanyard for defects in material, construction and workmanship. Defects designated by an asterisk (*) shall be classified major when seriously affecting serviceability or appearance and minor when affecting serviceability or appearance but not seriously.

Examine	Defect	Classification		
		Major	(*)	Minor
Cords	Not fabricated from specified material…….	X	-	-
	Spotted, stained, discolored or soiled…….	-	*	-
	Objectionable odor…….	-	-	*
	Cut or tear…….	X	-	-
	Broken, missing ends or picks…….	X	-	-
	Pulled threads…….	-	*	-
	Frayed edges…….	-	*	-
	Core not completely covered……...	-	*	-
	Core out of round…….	-	*	-
	Cords not continuous length, i,e., pieced….	X	-	-
Construction	Loop missing…….	X	-	-
	Not formed as specified…….	-	*	-
	Ends wrapped with less than 7 or more than 9 turns of wrapping cord……	-	*	-
	Free cord ends not secured as specified…	X	-	-
	Loop bound with less than 4 or more than 6 Turns of thread……	-	*	-
Swivel snap	Swivel snap missing…….	X	-	-
	Swivel snap damaged or deformed……	-	*	-
	Improper size…….	-	*	-
	Not plated as specified…….	X	-	-
	Not lacquered as specified…….	-	-	X

4.3.2.1.2 Examination of lanyard for defects in dimensions. Any dimension that is not within the specified tolerance shall be classified as a defect.

4.3.2.1.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall follow:

	Inspection Level	AQL	
		Major	Total
For defects applicable to 4.3.2.1.1	II	2-5	6.5
For defects applicable to 4.3.2.1.2	S-3	----	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of preparation for delivery requirements. An examination shall be made to determine whether applicable packaging, packing, and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item shipping lot. The inspection level shall be S-2 and the AQL be 2.5 defects per hundred units.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method application
Materials	Any component missing Any component damaged, affecting serviceability
Workmanship	Inadequate application of components, such as, incomplete closure of case liners, container flaps, loose strapping inadequate stapling Bulging or distorting containers
Content	Number of intermediate packages is more or less than required. 1/

1/ For this defect, 3 intermediate packages shall be examined from each shipping container in the sample.

5 PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the person responsible for packaging activity.

6 NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The Netherlands Orange Lanyard covered by this specification is intended to be worn by military personnel who meet the award criteria established for this decoration.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. When a guide sample will not be furnished (see 3.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

c. When a standard sample will not be furnished (see 3.1.2).
d. When first article is required (see 3.2).
e. Selection of applicable levels of preservation and packing (see 5.1).

6.3 Subject term (Key word) listing

Cotton yarn
Embroidery
Thread
Swivel
Wrapping cord

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.

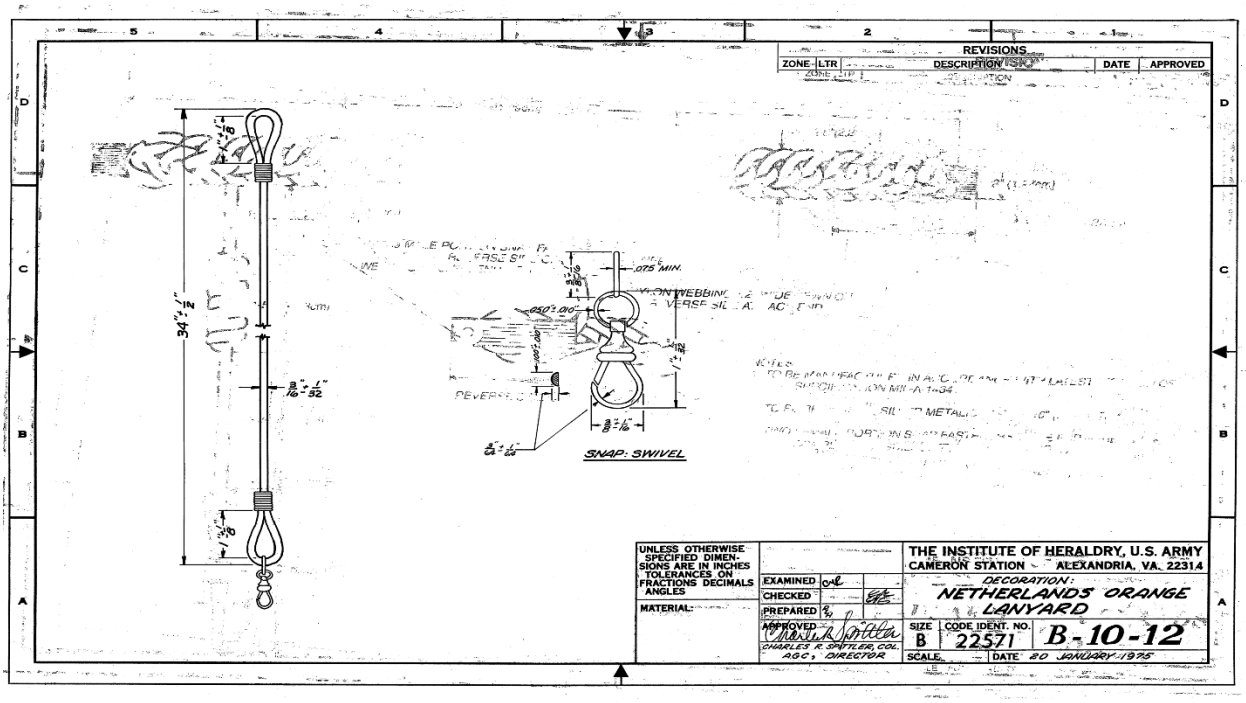


Figure 1. Netherland Orange Lanyard

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2026-379)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:42Z
Check the source to verify that this is the current version before use.